

EMC Test Report

Client Name : ShenZhen JHC Technology Development Co.,Ltd
Address : B,3rd Fl,A Block Junxiangda Bldg., Zhongshanyuan Rd.
West, Tongle Village,Nanshan District,Shenzhen
City,China 518052
Product Name : Industrial Waterproof Panel PC
Date : Jun. 01, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information.....	6
1.1. Client Information.....	6
1.2. Description of Device (EUT).....	6
1.3. Auxiliary Equipment Used During Test.....	7
1.4. Description of Test Mode.....	8
1.5. Test Summary.....	8
1.6. Test Equipment List.....	9
1.7. Description of Test Facility.....	12
1.8. EMS Performance Criteria.....	12
2. Power Line Conducted Emission Test.....	13
2.1. Test Standard and Limit.....	13
2.2. Test Setup.....	13
2.3. EUT Configuration on Measurement.....	13
2.4. Operating Condition of EUT.....	13
2.5. Test Procedure.....	14
2.6. Test Results.....	14
3. Asymmetric Mode Conducted Emission Test (Wired Network Ports).....	19
3.1. Test Standard and Limit.....	19
3.2. Test Setup.....	19
3.3. EUT Configuration on Measurement.....	19
3.4. Operating Condition of EUT.....	19
3.5. Test Procedure.....	20
3.6. Test Results.....	20
4. Radiated Emission Test.....	23
4.1. Test Standard and Limit.....	23
4.2. Test Setup.....	23
4.3. EUT Configuration on Measurement.....	24
4.4. Operating Condition of EUT.....	24
4.5. Test Procedure.....	24
4.6. Test Results.....	24
5. Harmonic Current Emission Test.....	33
5.1. Test Standard.....	33
5.2. Test Setup.....	33
5.3. Operating Condition of EUT.....	33
5.4. Test Results.....	33
6. Voltage Fluctuations & Flicker Test.....	34
6.1. Test Standard.....	34
6.2. Test Setup.....	34
6.3. Operating Condition of EUT.....	34

6.4. Test Results.....	34
7. Electrostatic Discharge Immunity Test.....	36
7.1. Test Standard and Level.....	36
7.2. Test Setup.....	36
7.3. EUT Configuration on Measurement.....	36
7.4. Operating Condition of EUT.....	36
7.5. Test Procedure.....	37
7.6. Test Results.....	37
8. RF Field Strength Susceptibility Test.....	39
8.1. Test Standard and Level.....	39
8.2. Test Setup.....	39
8.3. EUT Configuration on Measurement.....	40
8.4. Operating Condition of EUT.....	40
8.5. Test Procedure.....	40
8.6. Measuring Results.....	40
9. Electrical Fast Transient/Burst Immunity Test.....	42
9.1. Test Standard and Level.....	42
9.2. Test Setup.....	42
9.3. EUT Configuration on Measurement.....	42
9.4. Operating Condition of EUT.....	42
9.5. Test Procedure.....	43
9.6. Test Results.....	43
10. Surge Immunity Test.....	45
10.1. Test Standard and Level.....	45
10.2. Test Setup.....	45
10.3. EUT Configuration on Measurement.....	45
10.4. Operating Condition of EUT.....	45
10.5. Test Procedure.....	46
10.6. Test Results.....	46
11. Injected Currents Susceptibility Test.....	48
11.1. Test Standard and Level.....	48
11.2. Test Setup.....	48
11.3. EUT Configuration.....	48
11.4. Operating Condition of EUT.....	48
11.5. Test Procedure.....	49
11.6. Test Results.....	49
12. Voltage Dips And Interruptions Test.....	51
12.1. Test Standard and Level.....	51
12.2. Test Setup.....	51
12.3. EUT Configuration on Measurement.....	51
12.4. Operating Condition of EUT.....	51
12.5. Test Procedure.....	52



12.6. Test Results.....52

APPENDIX I -- TEST SETUP PHOTOGRAPH.....54

APPENDIX II -- Photo documentation.....60

TEST REPORT

Applicant : ShenZhen JHC Technology Development Co.,Ltd
Manufacturer : ShenZhen JHC Technology Development Co.,Ltd
Product Name : Industrial Waterproof Panel PC
Model No. : WPPC-H1580T-S001; WPPC-H1580T (P) -S001; WPPC-H1580T (P) -T001;
WPPC-H1580T-S002 ; WPPC-H1580T-T002 ; WPPC-H1580T (P) -S002 ;
WPPC-H1580T (P) -T002 ; WPPC-H1580T-S003 ; WPPC-H1580T-T003 ;
WPPC-H1580T (P) -S003; WPPC-H1580T (P) -T003; WPPC-H1580T-S004;
WPPC-H1580T-T004; WPPC-H1580T (P) -S004; WPPC-H1580T (P) -T004
Trade Mark : JHCTECH
Rating(s) : Input: DC 12V, 1.62A ,19.44W
Test Standard(s) : EN 55032: 2015+A11: 2020;
EN IEC 61000-3-2: 2019;
EN 61000-3-3: 2013+A1:2019;
EN 55035: 2017+A11: 2020;
(IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4;
IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-11)

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55032, EN IEC 61000-3-2, EN 61000-3-3, EN 55035 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt: May 10, 2021

Date of Test: May 10~May 28, 2021

Prepared By:

Yee Huang

(Yee Huang)

Approved & Authorized Signer:

KingKong Jin

(KingKong Jin)

1. General Information

1.1. Client Information

Applicant	:	ShenZhen JHC Technology Development Co.,Ltd
Address	:	B,3rd Fl,A Block Junxiangda Bldg., Zhongshanyuan Rd.West,Tongle Village,Nanshan District,Shenzhen City,China 518052
Manufacturer	:	ShenZhen JHC Technology Development Co.,Ltd
Address	:	B,3rd Fl,A Block Junxiangda Bldg., Zhongshanyuan Rd.West,Tongle Village,Nanshan District,Shenzhen City,China 518052
Factory	:	ShenZhen JHC Technology Development Co.,Ltd
Address	:	B,3rd Fl,A Block Junxiangda Bldg., Zhongshanyuan Rd.West,Tongle Village,Nanshan District,Shenzhen City,China 518052

1.2. Description of Device (EUT)

Product Name	:	Industrial Waterproof Panel PC	
Model No.	:	WPPC-H1580T-S001; WPPC-H1580T (P) -S001; WPPC-H1580T (P) -T001; WPPC-H1580T-S002 ; WPPC-H1580T-T002 ; WPPC-H1580T (P) -S002 ; WPPC-H1580T (P) -T002 ; WPPC-H1580T-S003 ; WPPC-H1580T-T003 ; WPPC-H1580T (P) -S003; WPPC-H1580T (P) -T003; WPPC-H1580T-S004; WPPC-H1580T-T004; WPPC-H1580T (P) -S004; WPPC-H1580T (P) -T004 (Note: All samples are the same except the model number & appearance, so we prepare “WPPC-H1580T-S001” for test only.)	
Trade Mark	:	JHCTECH	
Test Power Supply	:	AC 230V, 50Hz	
Test Sample No.	:	1-1-1	
Product Description	:	Adapter:	N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

MONITOR 1	:	Manufacturer: DELL
		M/N: 43M9 S/N: CN-OHMJ1V-74445-634-DTBL-AO1 Input: 100-240V, 50-60Hz, 1.5A
MONITOR 1	:	Manufacturer: DELL
		M/N: E1914Hf S/N: CN-034H2R-72872-419-AFJB Input:100V-240V, 1.5A, 50/60Hz TUV-GS, FCC, CE, KCC, VCCI

1.4. Description of Test Mode

Pretest Mode	Description
Mode 1	Communication & HDMI output
Mode 2	Communication & VGA output

For Mode 1 and 2 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Test Mode	Status
Power Line Conducted Emission Test (150KHz To 30MHz)	Mode 1	P
Asymmetric Mode Conducted Emissions Test(150KHz To 30MHz)	Mode 1	P
Radiated Emission Test (30MHz To 6GHz)	Mode 1	P
Harmonic Current Test	/	N
Voltage Fluctuations and Flicker Test	Mode 1	P
Electrostatic Discharge immunity Test	Mode 1	P
RF Field Strength susceptibility Test	Mode 1	P
Electrical Fast Transient/Burst Immunity Test	Mode 1	P
Surge Immunity Test	Mode 1	P
Injected Currents Susceptibility Test	Mode 1	P
Magnetic Field Susceptibility Test	/	N
Voltage Dips and Interruptions Test	Mode 1	P
P) Indicates “PASS”. N) Indicates “Not applicable”.		

1.6. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	L.I.S.N. Artificial Mains Network	Schwarzbeck	NSLK 8127	8127386	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Radiated Emission (30MHz-1000MHz) Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
2.	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	Oct. 26, 2020	1 Year
3.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Nov. 02, 2020	2 Year
4.	Software Name EZ-EMC	Ferrari Technology	EMEC-3A1	N/A	N/A	N/A

Radiated Emission (1GHz-6GHz) Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
3.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year



Asymmetric Mode Conducted Emissions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ISN	Schwarzbeck	NTFM 8158	#172	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Harmonic and Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Programmable AC Power source	IVYTECH	APS-5005A	632734	Oct. 26, 2020	1 Year
2.	Harmonic and Flicker Analyzer	EMC-PARTNER	HMONICS 1000-1P	164	Oct. 26, 2020	1 Year
3.	Harmonics-1000	N/A	Ed.3.0+4.0	N.A	N/A	N/A

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	emtest	ESD NX30.1	11891	Mar. 25, 2021	1 Year

Electrical Fast Transient/Burst Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.1	EFT Burst Simulator	PRIMA	EFT61004B	PR10114282	Oct. 26, 2020	1 Year
1.2	EFT-Clamp	PRIMA	EFT-Clamp	/	Oct. 26, 2020	1 Year
2.1	EFT Burst Simulator	TESEQ	NSG 3060	1480	Oct. 26, 2020	1 Year
2.2	CDN	TESEQ	CDN 3061	1408	Oct. 26, 2020	1 Year

R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	Agilent	N5182A	MY4818065 6	Oct. 26, 2020	1 Year
2.	Amplifier	Micotoop	MPA-80-1000-250	MPA190309 6	Oct. 26, 2020	1 Year
3.	Amplifier	Micotoop	MPA-1000-6000-100	MPA190312 2	Oct. 26, 2020	1 Year

4.	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	Apr.17, 2021	1 Year
5.	Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
6.	Power Sensor	Agilent	E9301A	MY4149890 6	Oct. 26, 2020	1 Year
7.	Power Sensor	Agilent	E9301A	MY4149808 8	Oct. 26, 2020	1 Year
8.	Power Meter	Agilent	E4419B	GB4020290 9	Oct. 26, 2020	1 Year
9.	Field Probe	ETS-Lindgren	HI-6006	00212747	Apr.17, 2021	1 Year
10.	RS Test software	EMtrace	EM 3	V1.1.7	N/A	N/A

Surge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Generator	TESEQ	NSG 3060	1480	Oct. 26, 2020	1 Year
2.	CDN	TESEQ	CDN 3061	1408	Oct. 26, 2020	1 Year
3.	Telecom port surge generator	PMI	TW101	190411	May 13,2021	1 Year

Injected Currents Susceptibility Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	C/S Conducted Immunity Test System	FRANKONIA	CIT-10	126A1196/20 12	Oct. 26, 2020	1 Year
2.	CDN	FRANKONIA	CDN - M2+ M3	A2210178/20 12	Oct. 26, 2020	1 Year
3.	6dB Attenuator	FRANKONIA	DAM 26W	1172202	Oct. 26, 2020	1 Year
4.	CIT-10	FRANKONIA	Version1.1.7	N/A	N.A	N/A
5.	EM-Clamp	FRANKONIA	EMCL-20	18101728-01 03	May 17,2021	1 Year

Voltage Dips and Interruptions Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	CYCLE SAG Simulator	PRIMA	DRP61011A G	PR12046234	Oct. 26, 2020	1 Year



1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128

1.8. EMS Performance Criteria

- ✓ A: Normal performance within the specification limits
- ✓ B: Temporary degradation or loss of function or performance which is self-recoverable
- ✓ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- ✓ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.



2. Power Line Conducted Emission Test

2.1. Test Standard and Limit


Test Standard	EN 55032
---------------	----------

Limits for conducted emissions

Test Limit	Frequency (MHz)	At mains terminals (dBμV)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	79 *	66 *
	0.50 ~ 30.00	73	60

Remark: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

2.2. Test Setup

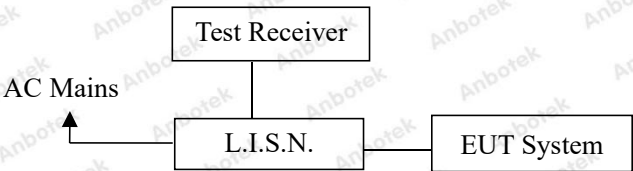

2.3. EUT Configuration on Measurement

The following equipments are installed on conducted emission measurement to meet EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4. Operating Condition of EUT

- 2.4.1. Setup the EUT as shown in Section 2.2.
- 2.4.2. Turn on the power of all equipments.
- 2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network(L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated for AC mains.

All the test results are listed in Section 2.6.

2.6. Test Results

PASS

The test curves are shown in the following pages.

Conducted Emission Test Data


Test Mode: Communication & HDMI output

Test Site: 1# Shielded Room

Test Specification: AC 230V, 50Hz

Comment: Live Line

Temp.: 24.5°C Hum.: 49%

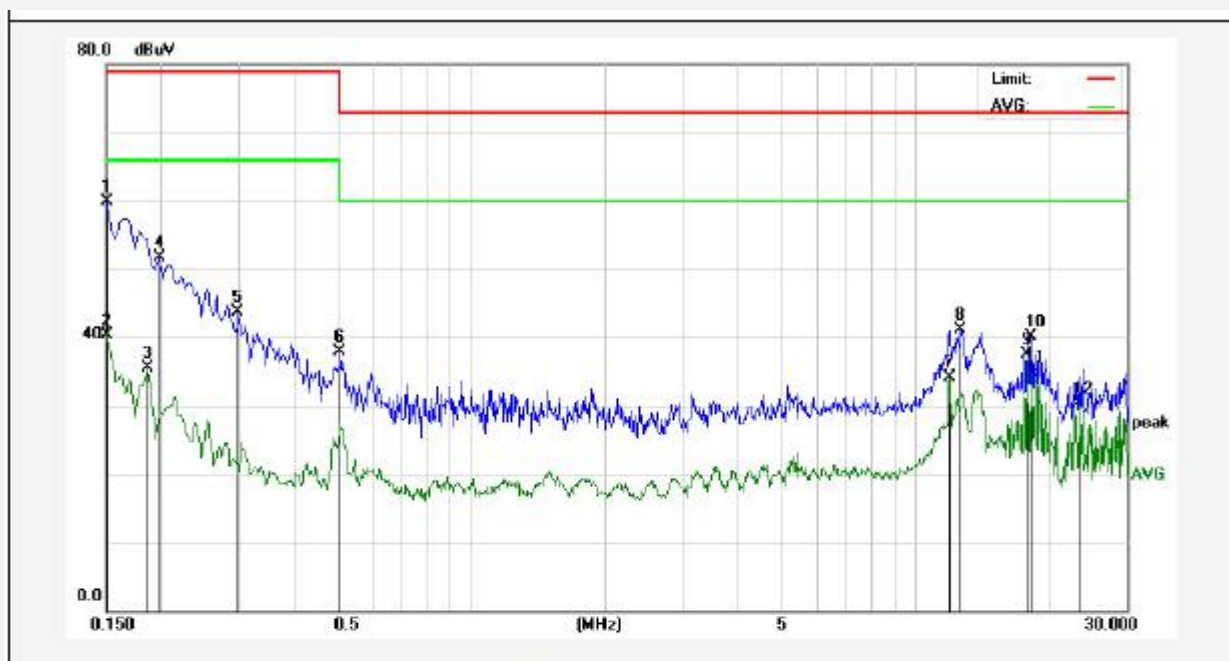

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	40.05	19.90	59.95	79.00	-19.05	QP	
2	0.1500	20.50	19.90	40.40	66.00	-25.60	AVG	
3	0.1860	15.68	19.90	35.58	66.00	-30.42	AVG	
4	0.1980	31.87	19.90	51.77	79.00	-27.23	QP	
5	0.2980	23.87	19.89	43.76	79.00	-35.24	QP	
6	0.5060	17.99	19.98	37.97	73.00	-35.03	QP	
7	11.9340	13.89	20.31	34.20	60.00	-25.80	AVG	
8	12.6860	20.78	20.30	41.08	73.00	-31.92	QP	
9	17.8980	17.26	20.31	37.57	60.00	-22.43	AVG	
10	18.2620	19.76	20.31	40.07	73.00	-32.93	QP	
11	18.2620	14.65	20.31	34.96	60.00	-25.04	AVG	
12	23.4460	10.08	20.30	30.38	60.00	-29.62	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data


Test Mode: Communication & HDMI output

Test Site: 1# Shielded Room

Test Specification: AC 230V, 50Hz

Comment: Neutral Line

Temp.: 24.5°C Hum.: 49%

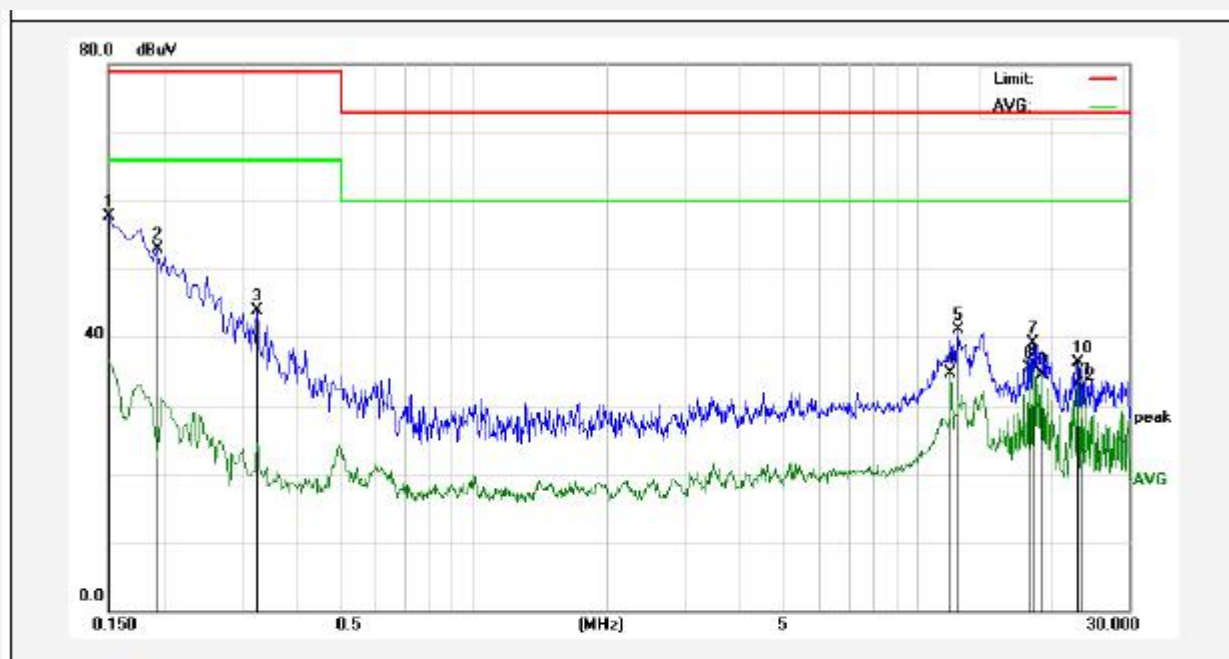


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	37.84	19.90	57.74	79.00	-21.26	QP	
2	0.1940	33.08	19.90	52.98	79.00	-26.02	QP	
3	0.3260	23.94	19.90	43.84	79.00	-35.16	QP	
4	11.9300	14.41	20.31	34.72	60.00	-25.28	AVG	
5	12.3300	20.75	20.30	41.05	73.00	-31.95	QP	
6	17.8980	15.26	20.31	35.57	60.00	-24.43	AVG	
7	18.2380	18.80	20.31	39.11	73.00	-33.89	QP	
8	18.2380	15.50	20.31	35.81	60.00	-24.19	AVG	
9	19.1940	14.18	20.33	34.51	60.00	-25.49	AVG	
10	23.0340	15.94	20.30	36.24	73.00	-36.76	QP	
11	23.0340	12.71	20.30	33.01	60.00	-26.99	AVG	
12	23.4180	11.95	20.30	32.25	60.00	-27.75	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data

Test Mode: Communication & VGA output
Test Site: 1# Shielded Room
Test Specification: AC 230V, 50Hz
Comment: Live Line
Temp.: 24.5°C Hum.: 49%

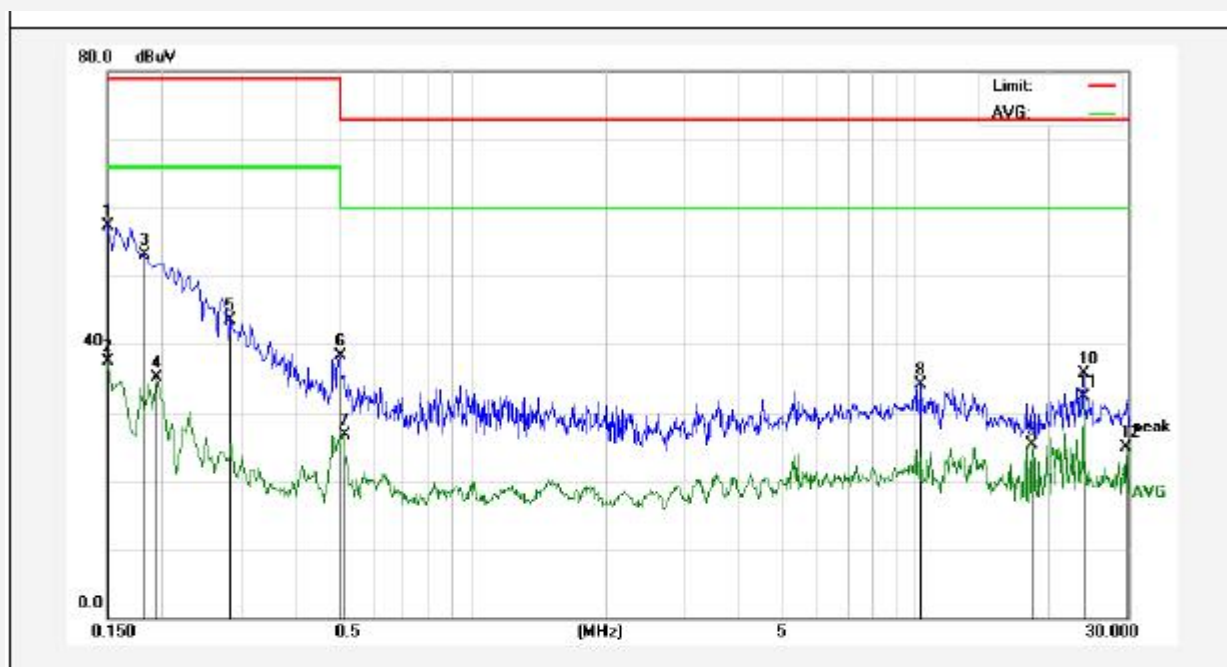


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	37.43	19.90	57.33	79.00	-21.67	QP	
2	0.1500	17.54	19.90	37.44	66.00	-28.56	AVG	
3	0.1819	33.12	19.90	53.02	79.00	-25.98	QP	
4	0.1940	15.28	19.90	35.18	66.00	-30.82	AVG	
5	0.2860	23.71	19.89	43.60	79.00	-35.40	QP	
6	0.5020	18.41	19.98	38.39	73.00	-34.61	QP	
7	0.5140	6.72	19.98	26.70	60.00	-33.30	AVG	
8	10.2460	13.85	20.34	34.19	73.00	-38.81	QP	
9	18.2420	4.97	20.31	25.28	60.00	-34.72	AVG	
10	23.8740	15.41	20.29	35.70	73.00	-37.30	QP	
11	23.8740	11.96	20.29	32.25	60.00	-27.75	AVG	
12	29.8380	4.73	20.27	25.00	60.00	-35.00	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data

Test Mode: Communication & VGA output
Test Site: 1# Shielded Room
Test Specification: AC 230V, 50Hz
Comment: Neutral Line
Temp.:24.5°C Hum.: 49%

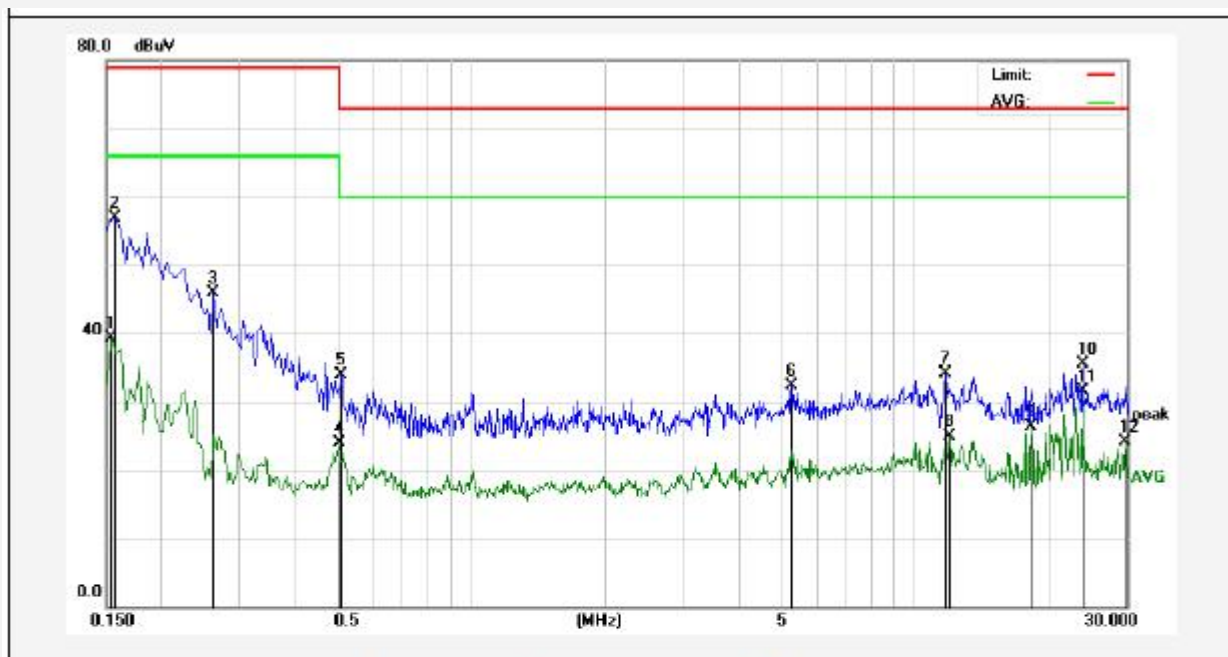

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	19.38	19.90	39.28	66.00	-26.72	AVG	
2	0.1580	37.03	19.90	56.93	79.00	-22.07	QP	
3	0.2620	26.08	19.89	45.97	79.00	-33.03	QP	
4	0.5020	3.91	19.98	23.89	60.00	-36.11	AVG	
5	0.5100	13.96	19.98	33.94	73.00	-39.06	QP	
6	5.2740	12.08	20.21	32.29	73.00	-40.71	QP	
7	11.7340	13.75	20.31	34.06	73.00	-38.94	QP	
8	11.9340	4.50	20.31	24.81	60.00	-35.19	AVG	
9	18.2420	5.90	20.31	26.21	60.00	-33.79	AVG	
10	23.8740	15.13	20.29	35.42	73.00	-37.58	QP	
11	23.8740	11.19	20.29	31.48	60.00	-28.52	AVG	
12	29.8380	3.84	20.27	24.11	60.00	-35.89	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

3. Asymmetric Mode Conducted Emission Test (Wired Network Ports)

3.1. Test Standard and Limit


Test Standard	EN 55032
---------------	----------

Limits for conducted emissions

Test Limit	Frequency (MHz)	At mains terminals (dBμV)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	97 ~ 87*	84 ~74*
	0.50 ~ 30.00	87	74

Remark: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.2. Test Setup

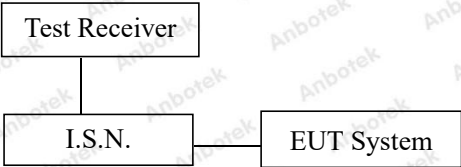

3.3. EUT Configuration on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown in Section 3.2.
- 3.4.2. Turn on the power of all equipments.
- 3.4.3. Let the EUT work in test mode and measure it.

3.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the wired network ports through Impedance Stabilization Network(ISN). and it is investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The frequency range from 150KHz to 30MHz is checked.

All the test results are listed in Section 3.6.

3.6. Test Results


PASS

The frequency range 150kHz to 30MHz is investigated

The test curves are shown in the following pages.

Conducted Emission Test Data

Test Mode: Communication & VGA output
Test Site: 1# Shielded Room
Test Specification: AC 230V, 50Hz
Comment: Signal Line
Temp.: 24.5°C Hum.:49%

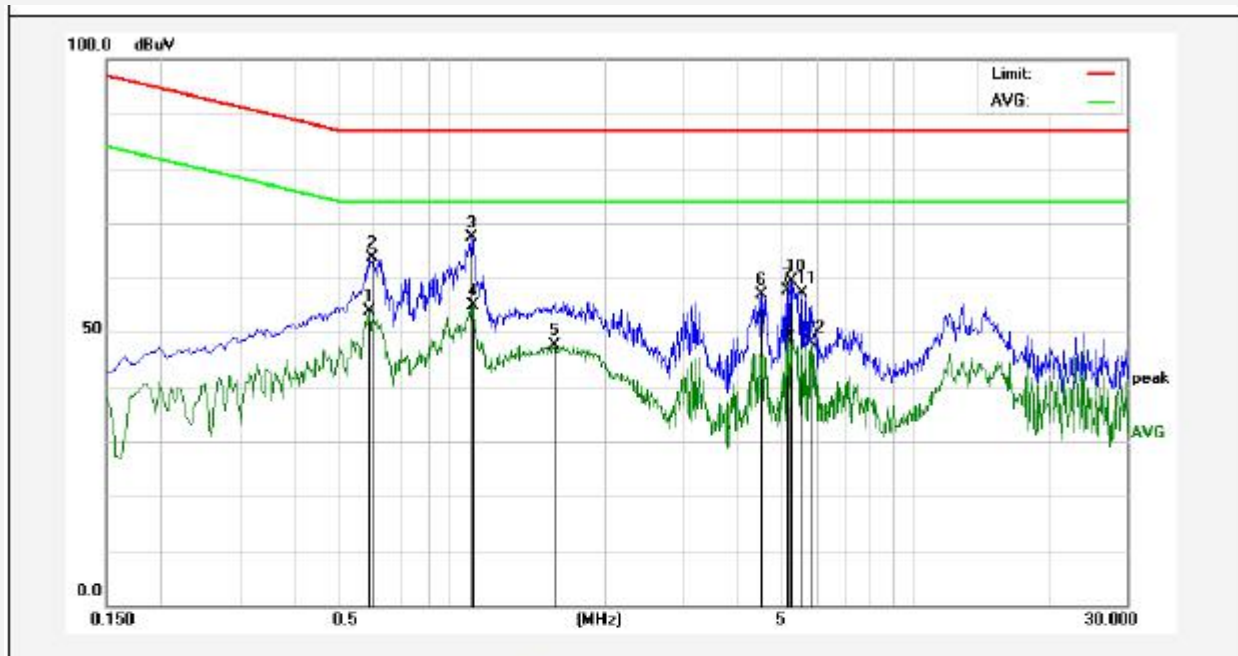

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5899	34.33	19.53	53.86	74.00	-20.14	AVG	
2	0.5980	44.03	19.53	63.56	87.00	-23.44	QP	
3	1.0020	47.89	19.52	67.41	87.00	-19.59	QP	
4	1.0060	35.40	19.52	54.92	74.00	-19.08	AVG	
5	1.5380	28.12	19.51	47.63	74.00	-26.37	AVG	
6	4.5020	37.45	19.52	56.97	87.00	-30.03	QP	
7	5.1579	38.01	19.52	57.53	87.00	-29.47	QP	
8	5.1579	29.36	19.52	48.88	74.00	-25.12	AVG	
9	5.2180	29.35	19.52	48.87	74.00	-25.13	AVG	
10	5.2700	39.90	19.52	59.42	87.00	-27.58	QP	
11	5.5700	37.68	19.52	57.20	87.00	-29.80	QP	
12	5.8060	28.62	19.52	48.14	74.00	-25.86	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data


Test Mode: Communication & HDMI output

Test Site: 1# Shielded Room

Test Specification: AC 230V, 50Hz

Comment: Signal Line

Temp.: 24.5°C Hum.:49%

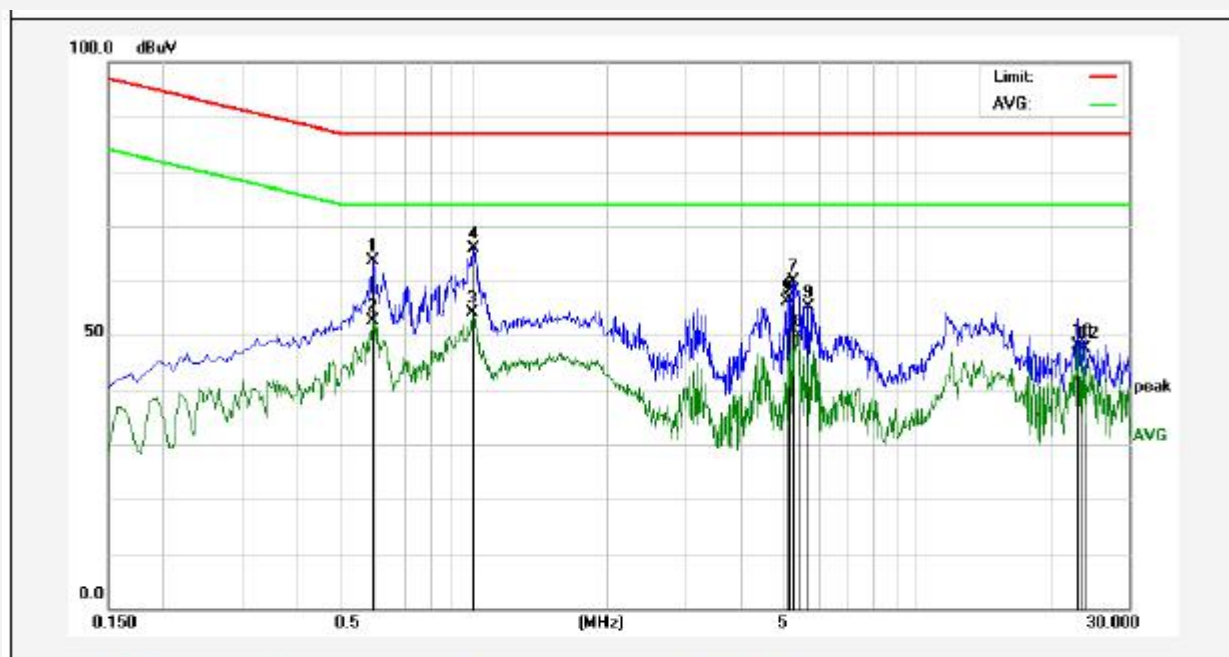

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5940	44.16	19.53	63.69	87.00	-23.31	QP	
2	0.5940	33.08	19.53	52.61	74.00	-21.39	AVG	
3	0.9900	34.68	19.52	54.20	74.00	-19.80	AVG	
4	1.0020	46.34	19.52	65.86	87.00	-21.14	QP	
5	5.0939	36.68	19.52	56.20	87.00	-30.80	QP	
6	5.1540	37.14	19.52	56.66	87.00	-30.34	QP	
7	5.2740	40.39	19.52	59.91	87.00	-27.09	QP	
8	5.3900	30.48	19.52	50.00	74.00	-24.00	AVG	
9	5.6900	35.61	19.52	55.13	87.00	-31.87	QP	
10	23.0620	28.59	19.66	48.25	74.00	-25.75	AVG	
11	23.4460	27.93	19.66	47.59	74.00	-26.41	AVG	
12	23.8700	28.07	19.67	47.74	74.00	-26.26	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit


4. Radiated Emission Test

4.1. Test Standard and Limit

Test Standard	EN 55032
---------------	----------

Radiated Emission Test Limit				
30~1000MHz				
Test Limit	Frequency (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dBμV/m)	
	30 ~ 230	3	50	
	230 ~ 1000	3	57	
1~6GHz				
Test Limit	Frequency (GHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT	
			Average (dBμV/m)	Peak (dBμV/m)
	1 ~ 3	3	56	76
	3 ~ 6	3	60	80
Remark: (1)The smaller limit shall apply at the combination point between two frequency bands. (2) Distance r efers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT. (3) 3M Limit=10M Limit+k k=20log(D1/D2)=10 3M Limit=10M Limit +10 (D1= 10M D2=3M)				

4.2. Test Setup

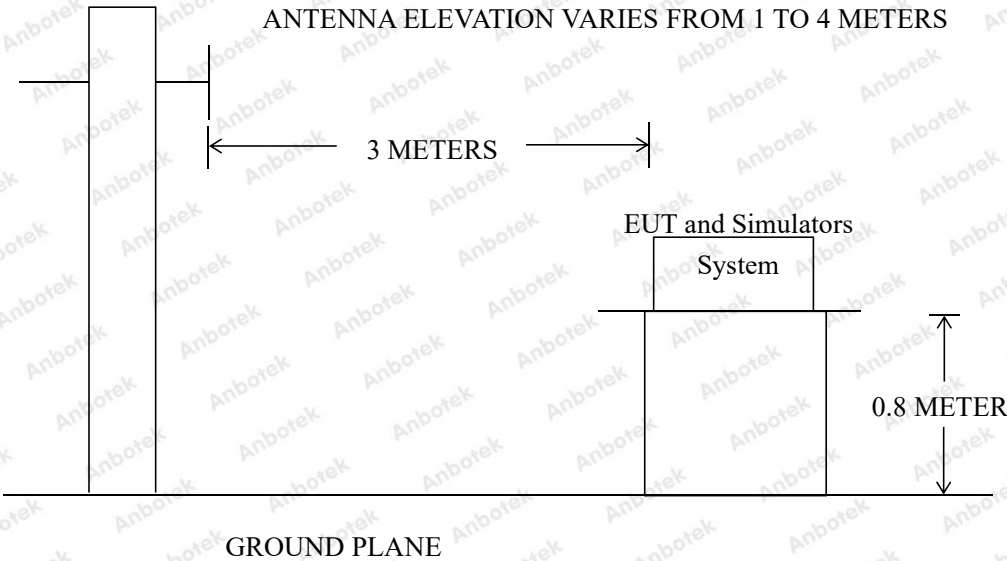

4.3. EUT Configuration on Measurement

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown in Section 4.2.

4.4.2. Turn on the power of all equipments.

4.4.3. Let the EUT work in test mode and measure it.

4.5. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 4.6.

4.6. Test Results

PASS

The frequency range from 30MHz to 6GHz is investigated.

The test curves are shown in the following pages.

Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN55032_Class A_30~1000MHz **Power Source:** AC 230V, 50Hz
Distance: 3m **Temp.(°C)/Hum.(%RH):** 22.4(°C)/49%RH
Test Mode: Mode 1



Note: Result=Reading+Factor Over Limit=Result-Limit



Test item: Radiation Test**Polarization:** Vertical**Standard:** (RE)EN55032_Class A_30~1000MHz**Power Source:** AC 230V, 50Hz**Distance:** 3m**Temp.(°C)/Hum.(%RH):** 22.4(°C)/49%RH**Test Mode:** Mode 1

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.6202	54.84	-16.83	38.01	50.00	-11.99	peak			
2	51.6616	46.50	-15.99	30.51	50.00	-19.49	peak			
3	81.4970	53.93	-19.91	34.02	50.00	-15.98	peak			
4	147.9214	58.96	-20.37	38.59	50.00	-11.41	peak			
5	298.2681	61.84	-17.12	44.72	57.00	-12.28	peak			
6	446.4141	58.71	-14.69	44.02	57.00	-12.98	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit

Report No.: 18230EC10079901

Page 27 of 64

Test item: Radiation Test

Polarization:

Horizontal

Standard: (RE)EN55032_Class A_30~1000MHz


Power Source:

AC 230V, 50Hz

Distance: 3m

Temp.(°C)/Hum.(%RH): 23.5(°C)/47%RH

Test Mode: Mode 2

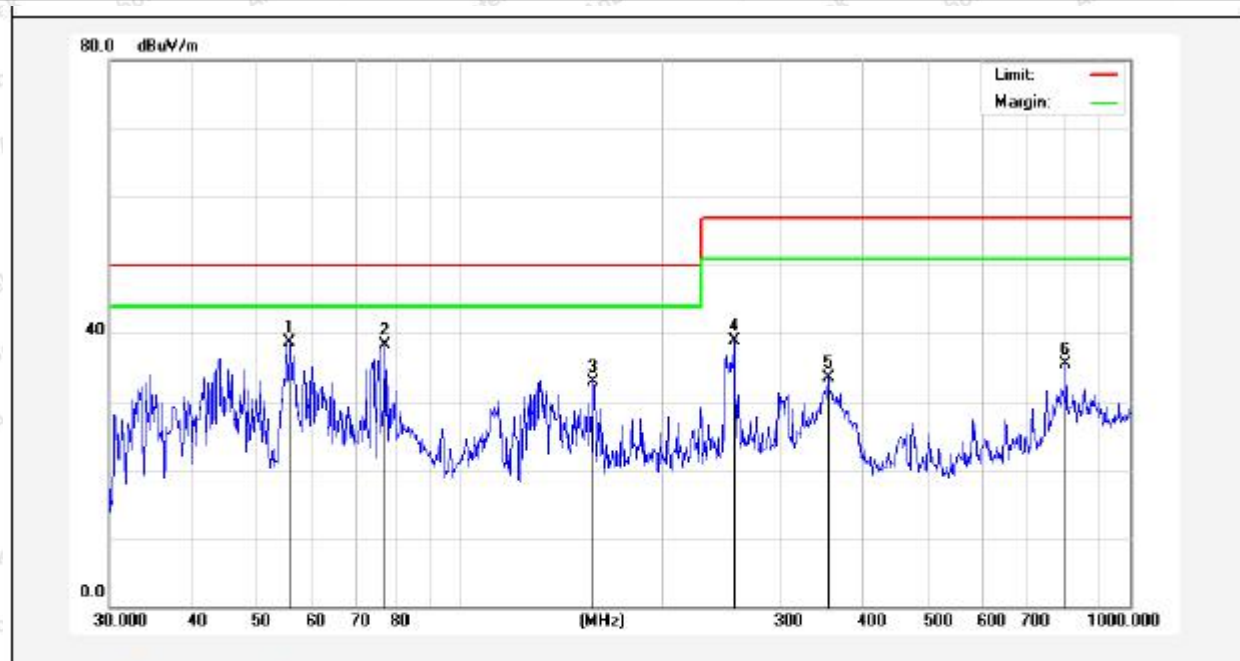

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.8046	55.24	-16.47	38.77	50.00	-11.23	peak			
2	77.3212	59.46	-21.06	38.40	50.00	-11.60	peak			
3	158.1123	54.51	-21.57	32.94	50.00	-17.06	peak			
4	256.5210	57.09	-18.25	38.84	57.00	-18.16	peak			
5	354.1831	46.56	-12.98	33.58	57.00	-23.42	peak			
6	801.7862	39.69	-4.13	35.56	57.00	-21.44	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit



Test item: Radiation Test

Polarization:

Vertical

Standard: (RE)EN55032_Class A_30~1000MHz

Power Source:

AC 230V, 50Hz

Distance: 3m

Temp.(°C)/Hum.(%RH):

23.5(°C)/47%RH

Test Mode: Mode 2




No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.2757	52.35	-13.61	38.74	50.00	-11.26	peak			
2	53.8818	56.58	-16.15	40.43	50.00	-9.57	peak			
3	84.7495	59.51	-16.88	42.63	50.00	-7.37	QP	100	0	
4	95.0930	54.40	-15.35	39.05	50.00	-10.95	peak			
5	112.9196	56.80	-16.72	40.08	50.00	-9.92	peak			
6	149.4857	57.01	-19.91	37.10	50.00	-12.90	peak			

Note: Result=Reading+Factor Over Limit=Result-Limit



Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN 55032_Class A_1-6GHz **Power Source:** AC 230V, 50Hz
Distance: 3m **Temp.(°C)/Hum.(%RH):** 23.5(°C)/47%RH
Test Mode: Mode 1

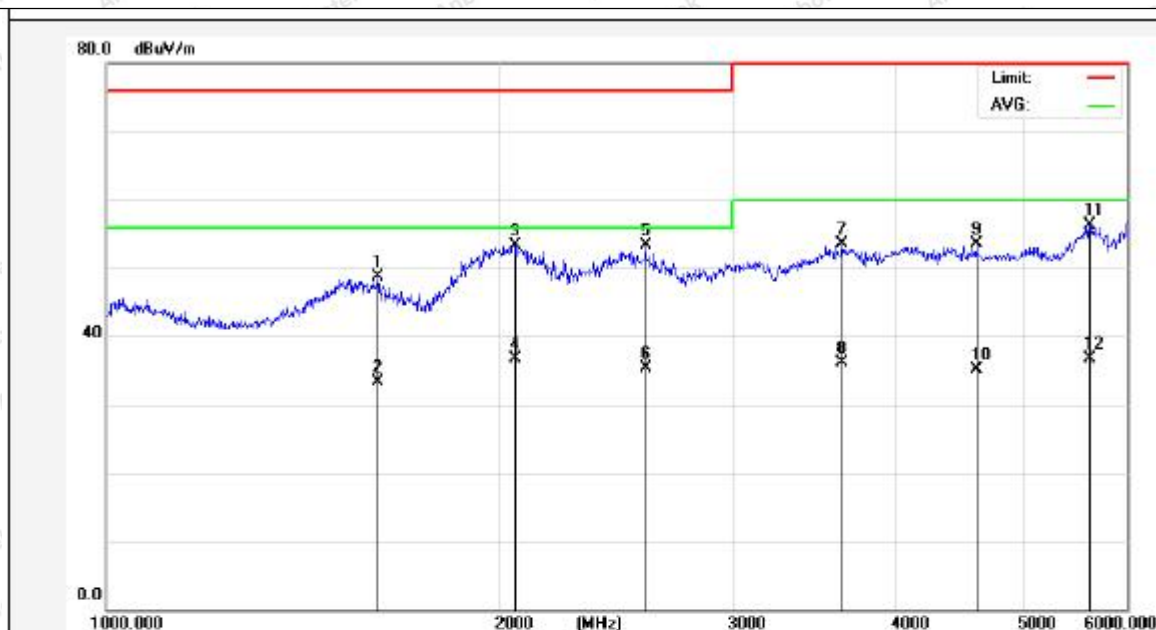

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	1610.602	43.06	5.63	48.69	76.00	-27.31	peak			
2	1610.602	27.60	5.63	33.23	56.00	-22.77	AVG			
3	2047.672	44.16	9.09	53.25	76.00	-22.75	peak			
4	2047.672	27.63	9.09	36.72	56.00	-19.28	AVG			
5	2575.514	43.08	10.22	53.30	76.00	-22.70	peak			
6	2575.514	25.07	10.22	35.29	56.00	-20.71	AVG			
7	3633.029	41.02	12.48	53.50	80.00	-26.50	peak			
8	3633.029	23.53	12.48	36.01	60.00	-23.99	AVG			
9	4602.405	38.55	14.87	53.42	80.00	-26.58	peak			
10	4602.405	20.33	14.87	35.20	60.00	-24.80	AVG			
11	5615.128	39.48	16.91	56.39	80.00	-23.61	peak			
12	5615.128	19.78	16.91	36.69	60.00	-23.31	AVG			

Note: Result=Reading+Factor Over Limit=Result-Limit



Test item: Radiation Test

Polarization:

Vertical

Standard: (RE)EN 55032_Class A_1-6GHz


Power Source:

AC 230V, 50Hz

Distance: 3m

Temp.(°C)/Hum.(%RH): 23.5(°C)/47%RH

Test Mode: Mode 1

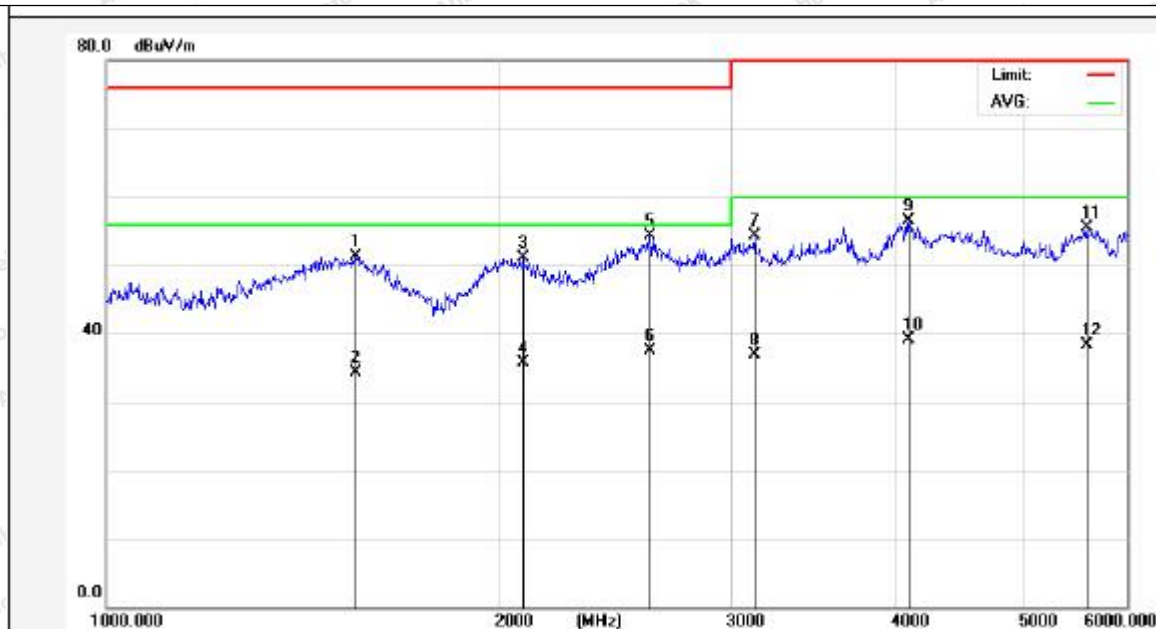


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	1551.126	46.25	5.11	51.36	76.00	-24.64	peak			
2	1551.126	29.18	5.11	34.29	56.00	-21.71	AVG			
3	2077.235	41.95	9.14	51.09	76.00	-24.91	peak			
4	2077.235	26.48	9.14	35.62	56.00	-20.38	AVG			
5	2598.691	43.97	10.31	54.28	76.00	-21.72	peak			
6	2598.691	27.23	10.31	37.54	56.00	-18.46	AVG			
7	3119.795	42.35	11.95	54.30	80.00	-25.70	peak			
8	3119.795	25.01	11.95	36.96	60.00	-23.04	AVG			
9	4089.092	43.42	13.04	56.46	80.00	-23.54	peak			
10	4089.092	26.09	13.04	39.13	60.00	-20.87	AVG			
11	5585.026	38.73	16.87	55.60	80.00	-24.40	peak			
12	5585.026	21.37	16.87	38.24	60.00	-21.76	AVG			

Note: Result=Reading+Factor Over Limit=Result-Limit




Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN 55032_Class A_1-6GHz **Power Source:** AC 230V, 50Hz
Distance: 3m **Temp.(°C)/Hum.(%RH):** 23.5(°C)/47%RH
Test Mode: Mode 2

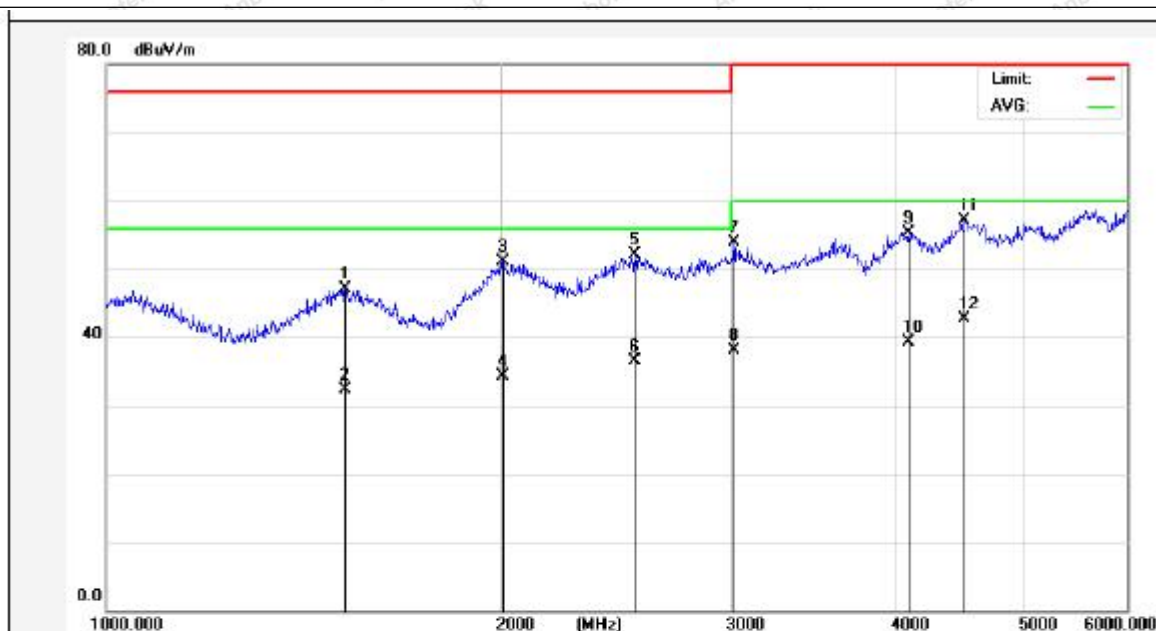

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	1520.853	42.35	4.85	47.20	76.00	-28.80	peak			
2	1520.853	27.39	4.85	32.24	56.00	-23.76	AVG			
3	2004.115	42.00	9.01	51.01	76.00	-24.99	peak			
4	2004.115	25.26	9.01	34.27	56.00	-21.73	AVG			
5	2529.778	41.99	10.05	52.04	76.00	-23.96	peak			
6	2529.778	26.47	10.05	36.52	56.00	-19.48	AVG			
7	3009.976	42.02	11.81	53.83	80.00	-26.17	peak			
8	3009.976	26.26	11.81	38.07	60.00	-21.93	AVG			
9	4089.092	42.26	13.04	55.30	80.00	-24.70	peak			
10	4089.092	26.17	13.04	39.21	60.00	-20.79	AVG			
11	4512.583	42.49	14.69	57.18	80.00	-22.82	peak			
12	4512.583	27.93	14.69	42.62	60.00	-17.38	AVG			

Note: Result=Reading+Factor Over Limit=Result-Limit

Test item: Radiation Test **Polarization:** Vertical
Standard: (RE)EN 55032_Class A_1-6GHz **Power Source:** AC 230V, 50Hz
Distance: 3m **Temp.(°C)/Hum.(%RH):** 23.5(°C)/47%RH
Test Mode: Mode 2

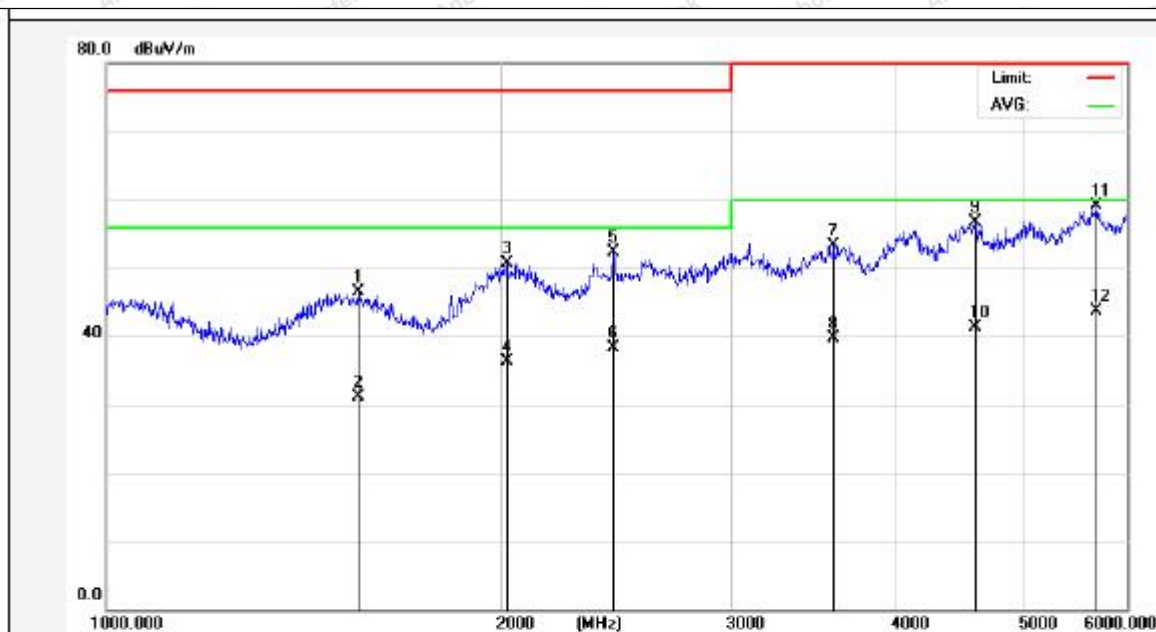

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	1556.694	41.40	5.16	46.56	76.00	-29.44	peak			
2	1556.694	26.04	5.16	31.20	56.00	-24.80	AVG			
3	2018.530	41.75	9.04	50.79	76.00	-25.21	peak			
4	2018.530	27.23	9.04	36.27	56.00	-19.73	AVG			
5	2431.997	42.41	9.80	52.21	76.00	-23.79	peak			
6	2431.997	28.46	9.80	38.26	56.00	-17.74	AVG			
7	3587.747	40.86	12.46	53.32	80.00	-26.68	peak			
8	3587.747	27.18	12.46	39.64	60.00	-20.36	AVG			
9	4594.166	41.87	14.85	56.72	80.00	-23.28	peak			
10	4594.166	26.39	14.85	41.24	60.00	-18.76	AVG			
11	5685.998	42.14	17.00	59.14	80.00	-20.86	peak			
12	5685.998	26.70	17.00	43.70	60.00	-16.30	AVG			


Note: Result=Reading+Factor Over Limit=Result-Limit

5. Harmonic Current Emission Test

5.1. Test Standard

Test Standard	EN IEC 61000-3-2
---------------	------------------

5.2. Test Setup

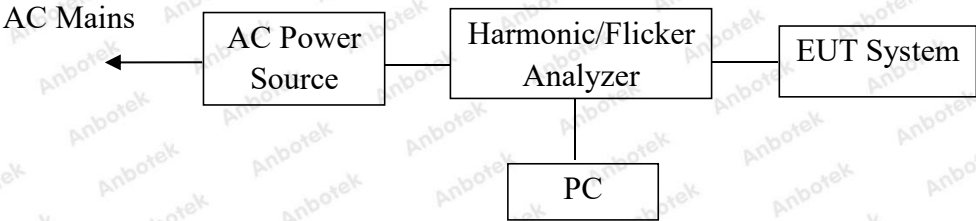

5.3. Operating Condition of EUT

- 5.3.1. Setup the EUT as shown on Section 5.2.
- 5.3.2. Turn on the power of all equipments.
- 5.3.3. After that, let the EUT work in test mode measure it.

5.4. Test Results


The active input power of the EUT is less than 75W. Therefore, according to EN IEC 61000-3-2, no limits are necessary.

6. Voltage Fluctuations & Flicker Test

6.1. Test Standard

Test Standard	EN 61000-3-3
---------------	--------------

6.2. Test Setup

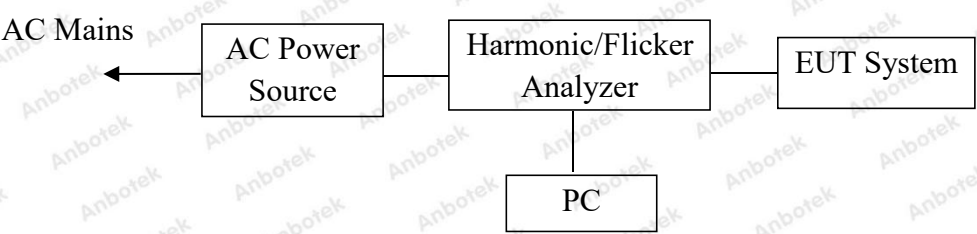

6.3. Operating Condition of EUT


- 6.3.1. Setup the EUT as shown on Section 6.2.
- 6.3.2. Turn on the power of all equipments.
- 6.3.3. After that, let the EUT work in test mode measure it.

6.4. Test Results

PASS

The test curves are shown in the following pages.

Flicker Test Summary per EN/IEC61000-3-3 (Run time)

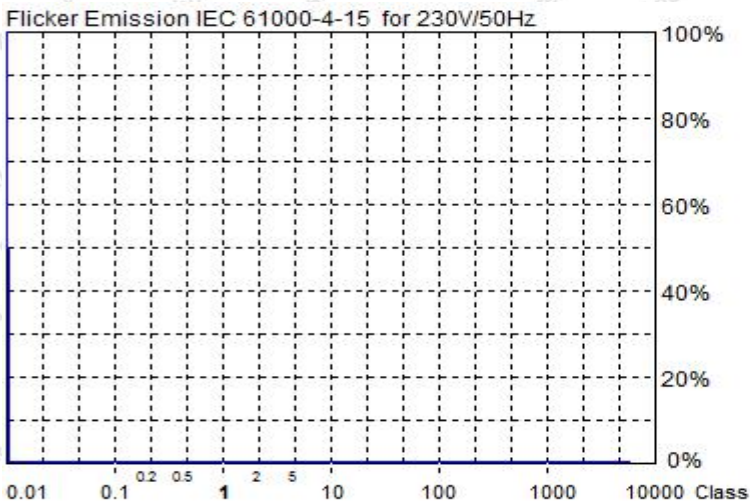

Actual Flicker (Fli):	0.00
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.00
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.04%
Limit (dc):	3.00%
Tmax 3.00% (dt):	0.00ms
Limit (dt>Lim):	200ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

Urms =	229.5 V	P =	24.69 W
Irms =	0.257 A	pf =	0.419

Range:	2 A
V-nom:	230 V

Test aborted, Result: PASSED

HAR-1000 EMC-Partner

Urms =	229.5V	Freq =	50.000	Range:	2 A
Irms =	0.257A	Ipk =	1.208A	cf =	4.703
P =	24.69W	S =	58.95VA	pf =	0.419

Test - Time : 10 x 1min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits :	Plt :	0.65	Pst :	1.00
	dmax :	4.00 %	dc :	3.00 %
	dtLim:	3.00 %	dt>Lim:	200ms

Test aborted, Result: PASSED

	dmax	dc	dt>Lim
	[%]	[%]	[ms]
1	0.000	0.000	0.000


7. Electrostatic Discharge Immunity Test

7.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-2)
Performance Criterion:	B
Severity Level: 3 / Air Discharge: ±8kV, Level: 2 / Contact Discharge: ±4kV	

Test Level		
Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	±2	±2
2.	±4	±4
3.	±6	±8
4.	±8	±15
X.	Special	Special

7.2. Test Setup

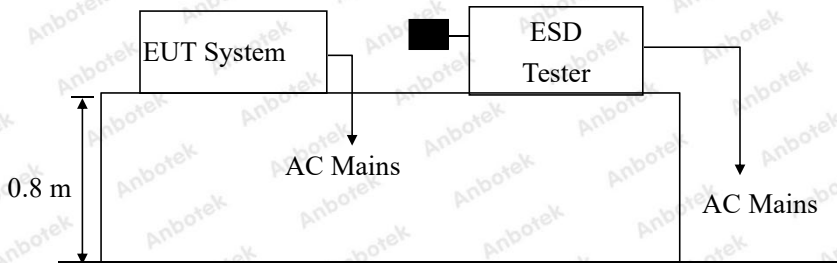

7.3. EUT Configuration on Measurement

The following equipments are installed on electrostatic discharge immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

7.4. Operating Condition of EUT

- 7.4.1. Setup the EUT as shown on Section 7.2.
- 7.4.2. Turn on the power of all equipments.
- 7.4.3. After that, let the EUT work in test mode measure it.

7.5. Test Procedure

7.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

7.5.2. Contact Discharge:

All the procedure shall be same as Section 7.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

7.5.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

7.5.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

7.6. Test Results

PASS

Please refer to the following page.



Electrostatic Discharge Test Results

Air discharge :	±8.0kV	Temperature :	25.1℃
Contact discharge :	±4.0kV	Humidity :	52%
Power Supply :	AC 230V, 50Hz	Expert conclusion :	A
Number of discharge :	10	Test Result:	☒ Pass ☐ Fail
Location		Kind A-Air Discharge C-Contact Discharge	Result
Metal	4 points	C	☒ A ☐ B ☐ C ☐ D
DC Port	4 points	C	☒ A ☐ B ☐ C ☐ D
Screw	4 points	C	☒ A ☐ B ☐ C ☐ D
Light	4 points	A	☒ A ☐ B ☐ C ☐ D
Slot	4 points	A	☒ A ☐ B ☐ C ☐ D
USB Port	4 points	A	☒ A ☐ B ☐ C ☐ D
Screen	4 points	A	☒ A ☐ B ☐ C ☐ D
ETH Port	4 points	A	☒ A ☐ B ☐ C ☐ D
HDMI Port	4 points	A	☒ A ☐ B ☐ C ☐ D
VGA Port	4 points	A	☒ A ☐ B ☐ C ☐ D
HCP	4 points	C	☒ A ☐ B ☐ C ☐ D
VCP of the front	4 points	C	☒ A ☐ B ☐ C ☐ D
VCP of the rear	4 points	C	☒ A ☐ B ☐ C ☐ D
VCP of the left	4 points	C	☒ A ☐ B ☐ C ☐ D
VCP of the right	4 points	C	☒ A ☐ B ☐ C ☐ D
Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).			




8. RF Field Strength Susceptibility Test

8.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-3)
Required Performance:	A
Frequency Range:	80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 0.5s

Test Level	
Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

8.2. Test Setup

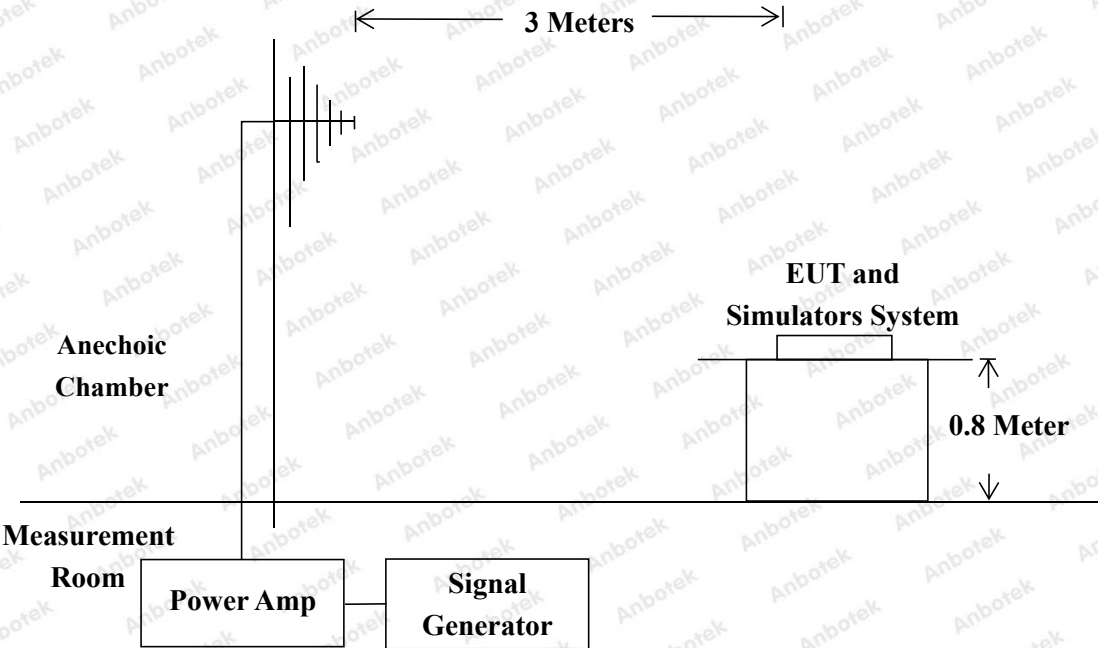

8.3. EUT Configuration on Measurement

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT as shown on Section 8.2.

8.4.2. Turn on the power of all equipments.

8.4.3. After that, let the EUT work in test mode measure it.

8.5. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) 80 MHz to 1000 MHz the field strength level was 3V/m, 1800MHz, 2600MHz, 3500MHz, 5000MHz the field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The frequency range is swept from 1800MHz, 2600MHz, 3500MHz, 5000MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 4) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 5) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

8.6. Measuring Results

PASS

Please refer to the following page.



RF Field Strength Susceptibility Test Results

Field Strength :	3V/m	Temperature :	25℃
Expert conclusion :	A	Humidity :	50%
Power Supply :	AC 230V, 50Hz	Test Result :	☒ Pass ☐ Fail
Dwell Time:	1s		

Frequency Range	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80MHz~1000MHz	H / V	3 V/m (rms)	Front	☒ A ☐ B ☐ C ☐ D
			Rear	
			Left	
			Right	
1800MHz 2600MHz 3500MHz 5000MHz	H / V	3 V/m (rms)	Front	☒ A ☐ B ☐ C ☐ D
			Rear	
			Left	
			Right	


9. Electrical Fast Transient/Burst Immunity Test

9.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-4)
Performance criterion:	B
Severity Level 2: 1.00kV	

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.50 kV	0.25 kV
2.	1.00 kV	0.50 kV
3.	2.00 kV	1.00 kV
4.	4.00 kV	2.00 kV
X.	Special	Special

9.2. Test Setup

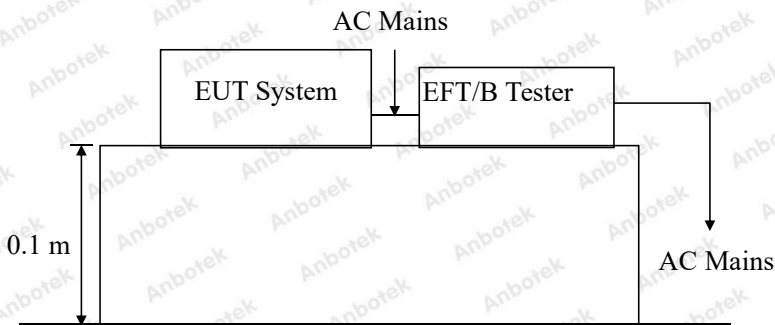

9.3. EUT Configuration on Measurement

The following equipments are installed on electrical fast transient/burst immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

9.4. Operating Condition of EUT

- 9.4.1. Setup the EUT as shown in Section 9.2.
- 9.4.2. Turn on the power of all equipments.
- 9.4.3. Let the EUT work in test mode and measure it.

9.5. Test Procedure

The EUT is put on the table which is 0.1 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

9.5.1. For input and output AC power ports:

The EUT is connected to the Power mains by using a coupling device which couples the EFT interference signal to AC Power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

9.5.2. For signal lines and control lines ports:

Select tests based on product characteristics.

9.5.3. For DC output line ports:

Select tests based on product characteristics.

9.6. Test Results

PASS

Please refer to the following page.



Electrical Fast Transient/Burst Test Results

Ambient Condition : 25.1℃ / 52% RH		Expert conclusion : A	
Power Supply .: AC 230V, 50Hz		Test Result : ☒ Pass ☐ Fail	
Inject Line : AC Mains		Inject Method: Direct	Inject Time(s): 120
Line	Polarity	Test Voltage (kV)	Result
AC Line	±	1.00kV	☒ A ☐ B ☐ C ☐ D
DC Line			
Signal Line			


10. Surge Immunity Test

10.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-5)
Performance criterion:	B
Severity Level 2, Line to Line: 1.0kV; Severity Level 3, Line to Earth: 2.0kV	

Test Level	
Severity Level	Open-Circuit Test Voltage (kV)
1.	0.5
2.	1.0
3.	2.0
4.	4.0
X.	Special

10.2. Test Setup

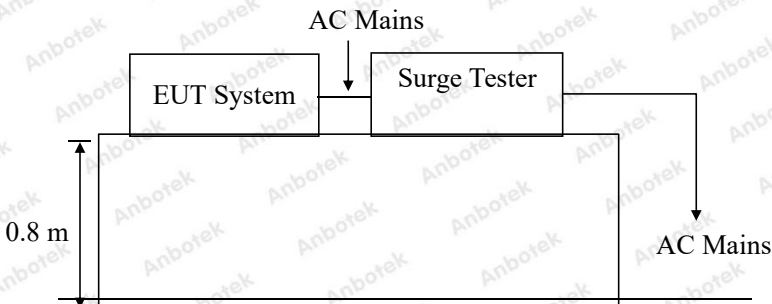

10.3. EUT Configuration on Measurement

The following equipments are installed on surge immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

10.4. Operating Condition of EUT

- 10.4.1. Setup the EUT as shown in Section 10.2.
- 10.4.2. Turn on the power of all equipments.
- 10.4.3. Let the EUT work in test mode and measure it.

10.5. Test Procedure

10.5.1. Set up the EUT and test generator as shown on Section 10.2.

10.5.2. For line to line coupling mode, provide a 1.0 kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

10.5.3. For line to earth coupling mode, provide a 2.0 kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

10.5.4. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

10.5.5. Different phase angles are done individually.

10.5.6. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

10.6. Test Results

PASS

Please refer to the following page.



Surge Immunity Test Results

Humidity :	52%	Temperature :	25.1℃		
Power Supply :	AC 230V, 50Hz	Expert conclusion:	A		
Test Result :	☒ Pass ☐ Fail				
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result
L-N	+	☐ 0° ☒ 90° ☐ 180° ☐ 270°	5	1.0kV	☒ A ☐ B ☐ C ☐ D
L-N	-	☐ 0° ☐ 90° ☐ 180° ☒ 270°	5	1.0kV	☒ A ☐ B ☐ C ☐ D
L-GND	+	☐ 0° ☒ 90° ☐ 180° ☐ 270°	5	2.0kV	☒ A ☐ B ☐ C ☐ D
L-GND	-	☐ 0° ☐ 90° ☐ 180° ☒ 270°	5	2.0kV	☒ A ☐ B ☐ C ☐ D
N-GND	+	☐ 0° ☐ 90° ☐ 180° ☒ 270°	5	2.0kV	☒ A ☐ B ☐ C ☐ D
N-GND	-	☐ 0° ☒ 90° ☐ 180° ☐ 270°	5	2.0kV	☒ A ☐ B ☐ C ☐ D


11. Injected Currents Susceptibility Test

11.1. Test Standard and Level

Test Standard	EN 55035 (IEC 61000-4-6)
Performance criterion	A

Test Level	
Level	Field Strength V
1.	1
2.	3
3.	10
X.	Special

11.2. Test Setup

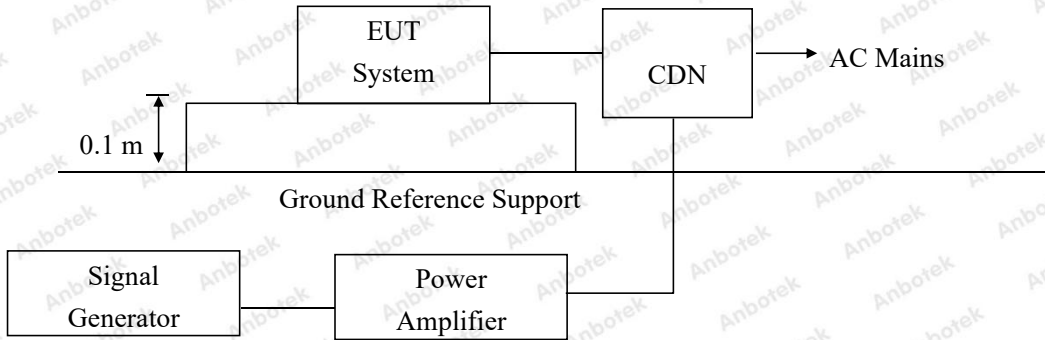

11.3. EUT Configuration

The following equipments are installed on currents susceptibility measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

11.4. Operating Condition of EUT

- 11.4.1. Setup the EUT as shown in Section 11.2.
- 11.4.2. Turn on the power of all equipments.
- 11.4.3. Let the EUT work in test mode and measure it.

11.5. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 11.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

11.5.1. For signal lines and control lines ports:

Select tests based on product characteristics.

11.5.2. For DC output line ports:

Select tests based on product characteristics.

11.6. Test Results

PASS

Please refer to the following page.



Injected Currents Susceptibility Test Results

Humidity : 52%		Temperature : 25.1℃	
Power Supply : AC 230V, 50Hz		Expert conclusion: A	
Test Result : ☒ Pass ☐ Fail			
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result
0.15 ~ 10	AC Mains	3V	☒ A ☐ B ☐ C ☐ D
10 ~ 30	AC Mains	3V to 1V	☒ A ☐ B ☐ C ☐ D
30 ~ 80	AC Mains	1V	☒ A ☐ B ☐ C ☐ D
Remark : 1. Modulation Signal:1KHz 80% AM			


12. Voltage Dips And Interruptions Test

12.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-11)
Performance Criterion:	B&C

Test Level		
Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
70	30	1
0	100	5
/	/	10
		25
		50
		*

12.2. Test Setup

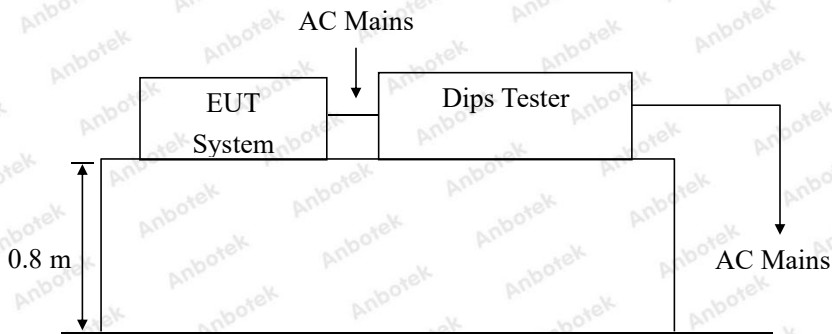

12.3. EUT Configuration on Measurement

The following equipments are installed on voltage dips and interruptions measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

12.4. Operating Condition of EUT

- 12.4.1. Setup the EUT as shown in Section 12.2.
- 12.4.2. Turn on the power of all equipments.
- 12.4.3. Let the EUT work in test mode and measure it.

12.5. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 12.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

12.6. Test Results

PASS

Please refer to the following page.



Voltage Dips and Interruptions Test Results

Temperature : 25.1℃		Humidity : 52%	
Power Supply : AC 230V, 50Hz		Expert conclusion : B&C	
Test Result : ☒ Pass ☐ Fail			
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Result
0	100	0.5P	☐ A ☒ B ☐ C ☐ D
70	30	25P	☐ A ☐ B ☒ C ☐ D
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Performance Criterion
0	100	250P	☐ A ☐ B ☒ C ☐ D

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test



Photo of Asymmetric Mode Conducted Emissions Test

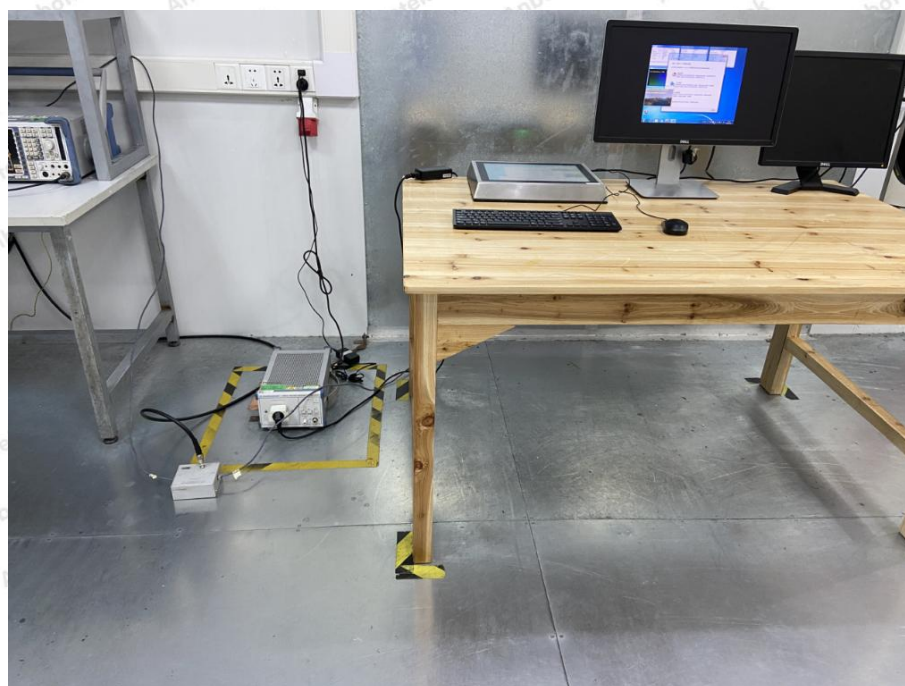


Photo of Radiated Emission Test (30-1000MHz)

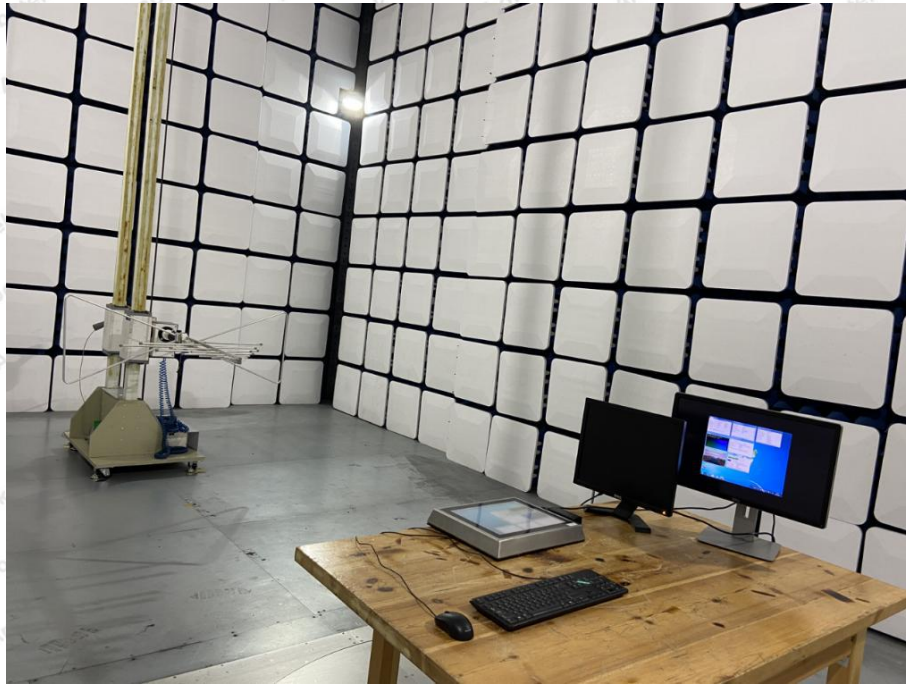


Photo of Radiated Emission Test (1-6GHz)

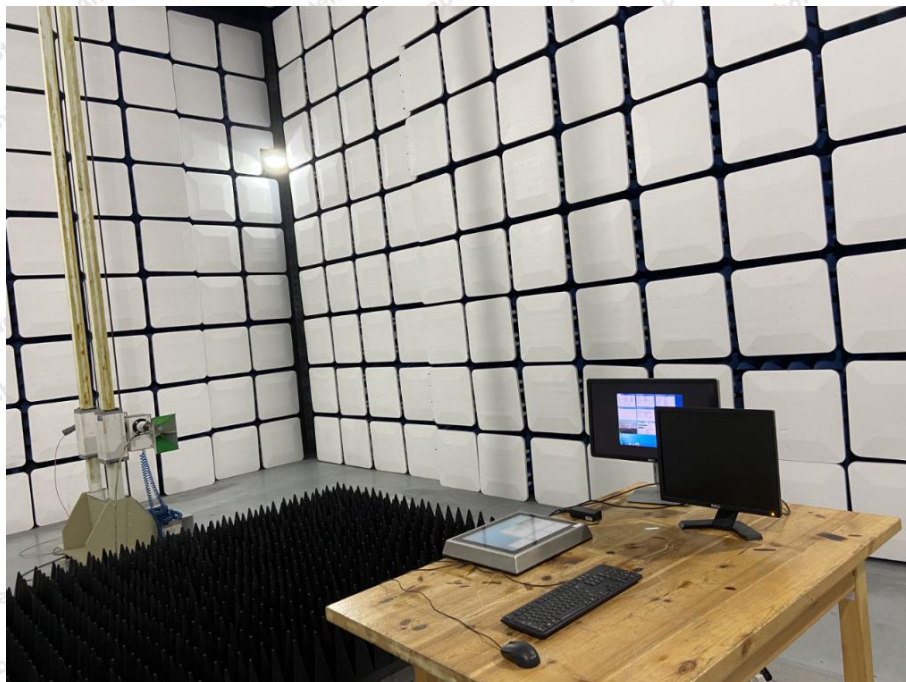


Photo of Flicker/ Harmonic Test



Photo of Electrostatic Discharge Immunity Test

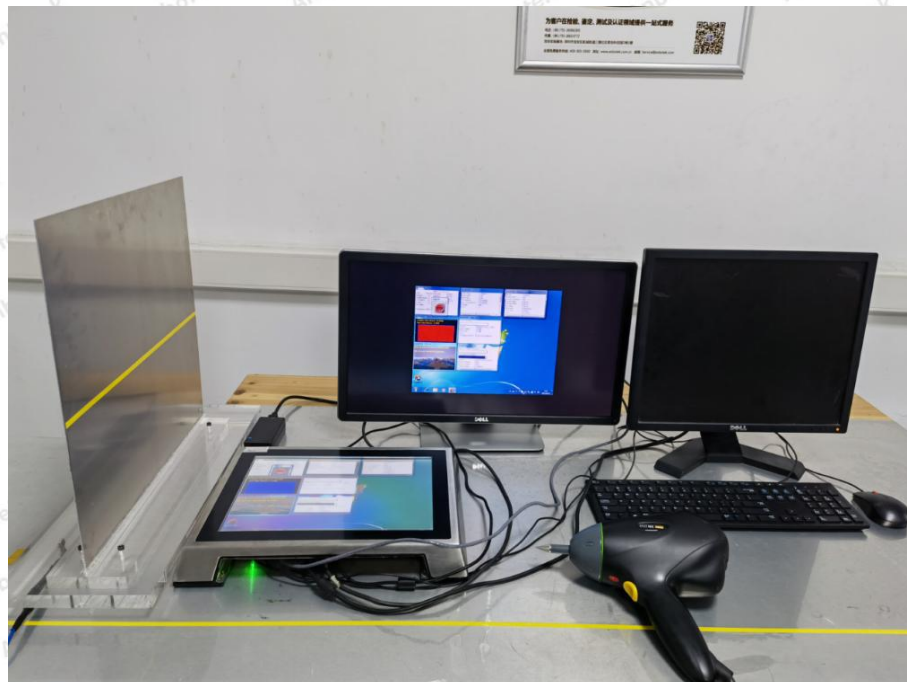


Photo of RF Field Strength susceptibility Test



Photo of Electrical Fast Transient/Burst Immunity Test



Photo of Surge Immunity Test



Photo of Injected currents susceptibility Test


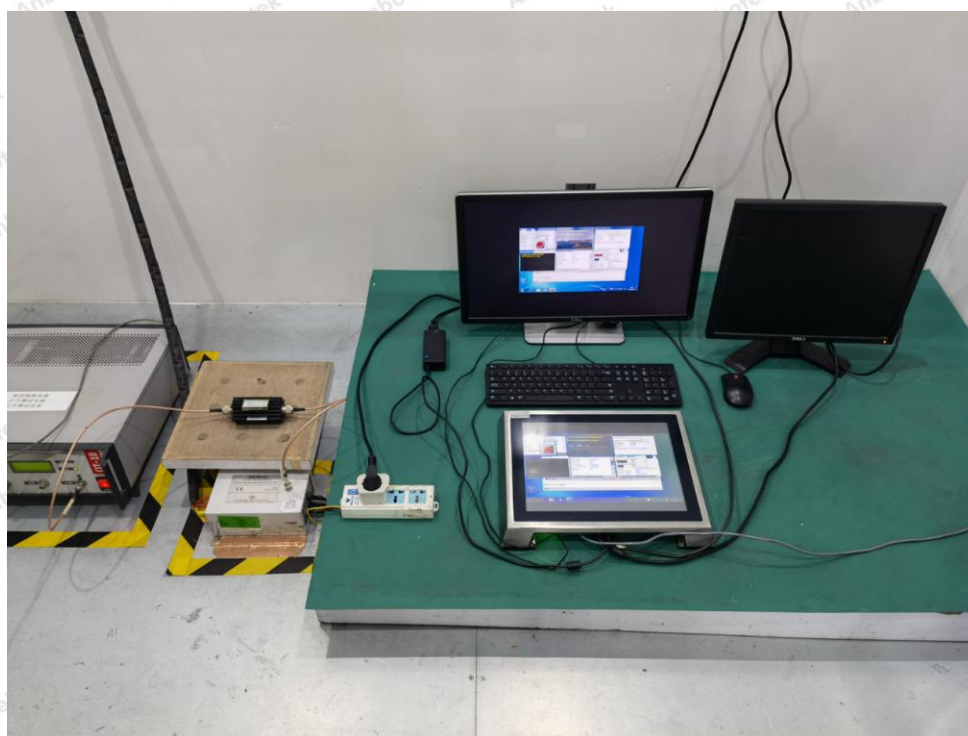


Photo of Voltage Dips and Interruptions Test

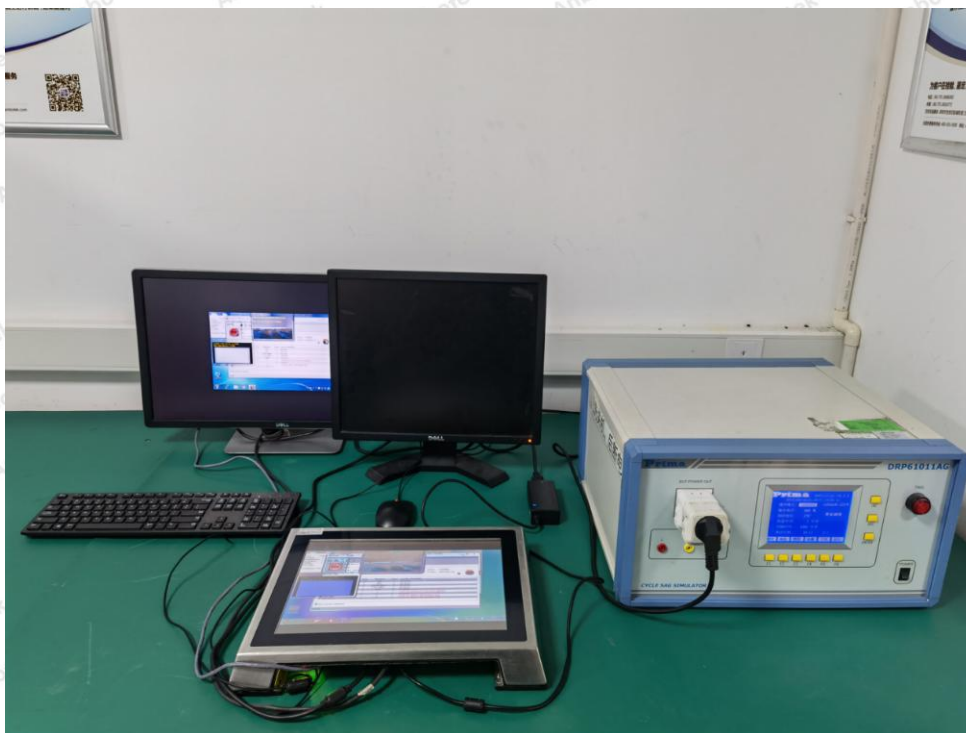

APPENDIX II -- Photo documentation



Photo 3

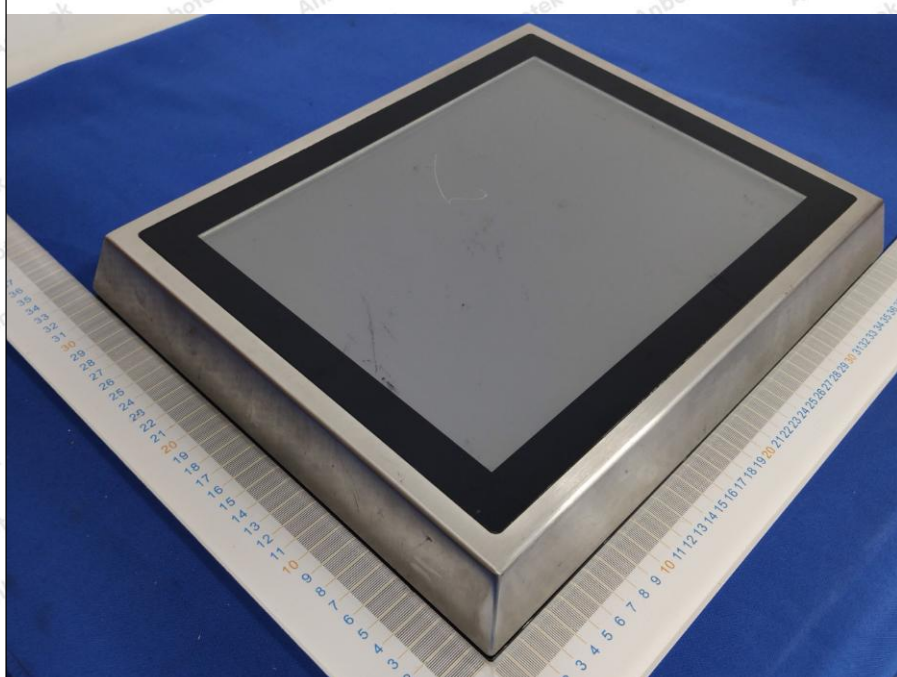


Photo 4

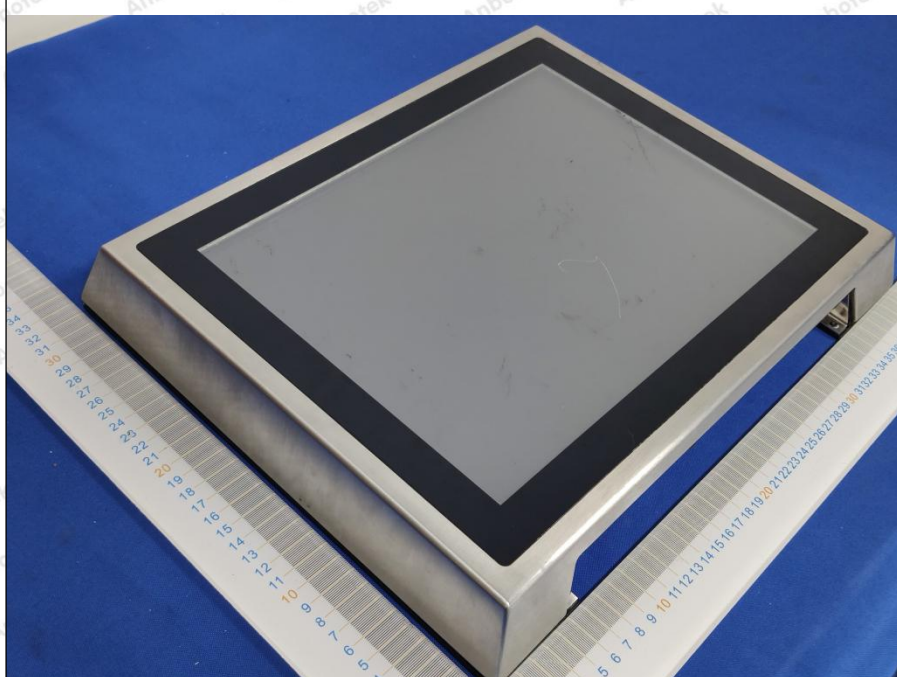


Photo 5



Photo 6



Photo 7

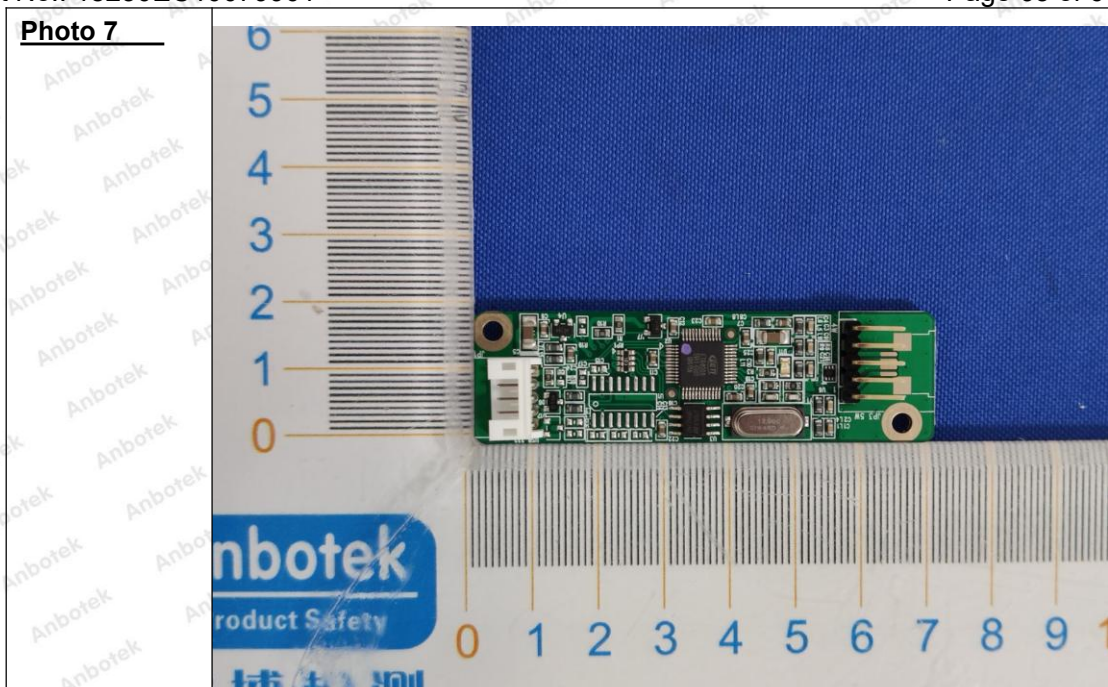


Photo 8



CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----

