


User's Manual

KGEC-6300

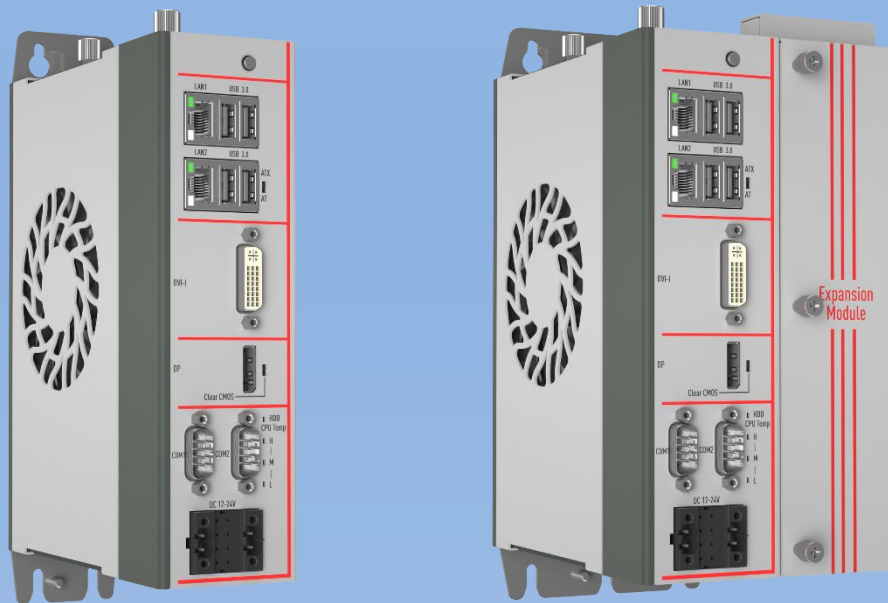

Ver.: A0.1

Date: 2020-09-11

[illegible]

Copyright

The documentation and the software included with this product are copy- righted 2020 by Shenzhen JHC Technology Development Co.,Ltd. All rights are reserved. Shenzhen JHC Technology Development Co.,Ltd. reserves the right to make improvements in the products described in this manual at any time without notice. No part of this manual may be reproduced, copied, translated or transmitted in any form or by any means without the prior written permission of Shenzhen JHC Technology Development Co., Ltd . Information provided in this manual is intended to be accurate and reliable. However, Shenzhen JHC Technology Development Co., Ltd . assumes no responsibility for its use, nor for any infringements of the rights of third parties, which may result from its use.

Product Warranty (2 years)

JHC warrants to you, the original purchaser, that each of its products will be free from defects in materials and workmanship for 2 years from the date of purchase.

This warranty does not apply to any products which have been repaired or altered by persons other than repair personnel authorized by JHC, or which have been subject to misuse, abuse, accident or improper installation.

JHC assumes no liability under the terms of this warranty as a consequence of such events.

Because of JHC's high quality-control standards and rigorous testing, most of our customers never need to use our repair service. If a JHC product is defective, it will be repaired or replaced at no charge during the warranty period. For out-of-warranty repairs, you will be billed according to the cost of replacement materials, service time and freight. Please consult your dealer for more details.

If you think you have a defective product, follow these steps:

1. Collect all the information about the problem encountered. (For example, CPU speed, JHC products used, other hardware and software used, etc.) Note anything abnormal and list any onscreen messages you get when the problem occurs.
2. Call your dealer and describe the problem. Please have your manual, product, and any helpful information readily available.
3. If your product is diagnosed as defective, obtain an RMA (return merchandise authorization) number from your dealer. This allows us to process your return more quickly.
4. Carefully pack the defective product, a fully-completed Repair and Replacement Order Card and a photocopy proof of purchase date (such as your sales receipt) in a shippable container. A product returned without proof of the purchase date is not eligible for warranty service.
5. Write the RMA number visibly on the outside of the package and ship it prepaid to your dealer.

Declaration of Conformity

CE

This product has passed the CE test for environmental specifications when shielded cables are used for external wiring. We recommend the use of shielded cables. This kind of cable is available from JHC. Please contact your local supplier for ordering information. Test conditions for passing included the equipment being operated within an industrial enclosure. In order to protect the product from being damaged by ESD (Electrostatic Discharge) and EMI leakage, we strongly recommend the use of CE-compliant industrial enclosure products.

FCC Class B

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Technical Support and Assistance

- Step 1. Visit the JHC web site at www.jhctech.com.cn where you can find the latest information about the product.
- Step 2. Contact your distributor, sales representative, or JHC's customer service center for technical support if you need additional assistance. Please have the following information ready before you call:
- Product name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
- The exact wording of any error messages

CONTENTS

General Information	4
1.1 Introduction	5
1.2 Features	5
1.3 Specifications	7
1.3.1 General.....	7
1.3.2 Display.....	7
1.3.3 Ethernet	7
1.3.4 Power Consumption	7
1.4 Environmental Specifications.....	7
1.5 Order information	8
1.6 Mechanical Specifications	8
Hardware Installation	12
2.1 Introduction	13
2.2 Switches	13
2.2.1 CLEAR/COMS -Clear CMOS Data.....	13
2.2.2 AT/ATX Power on mode selection	14
2.3 I/O/Button/LED Indication	14
2.3.1 Ethernet Connector	15
2.3.2 USB.....	16
2.3.3 DP	17
2.3.4 DVI-I	17
2.3.5 Power input (DC-IN).....	18
2.3.6 COM	19

2.3.7 Mini PCIe.....	19
2.3.8 mSATA	20
2.3.9 PCI (T002)	22
2.3.10 PCIeX4 (T002)	22
2.3.15 LED	24
2.4 Installation	25
2.4.1 mSATA installation.....	25
2.4.2 Mini PCIe installation	26
2.4.3 PCI installation (T001/2)	26
2.4.4 PCIX4 installation (T001/2)	27
BIOS Setup.....	28
3.1 BIOS Description	29
3.1.1 Entering the Setup Utility	29
3.2 BIOS parameter settings	30
3.2.1 BIOS Navigation Keys	31
3.2.2 Main Menu	31
3.2.3 Advanced Menu	33
3.2.4 Chipset Menu.....	41
3.2.5 Security menu	47
3.2.6 Boot menu	48
3.2.7 Save & Exit menu	49
3.3 Updating the BIOS.....	50
Driver Installation	51
4.1 Follow the sequence below to install the drivers:	52
4.2 Installation:.....	52
4.3 CPU TEMP LED driver.....	53

4.4 Utility Software Reference 54

SYSTEM RESOURCE55

5.1 WDT and GPIO 56

CHAPTER

1



General Information

1.1 Introduction

The KGEC-6300 is a new edge controller by JHC, and the mainboard and sub-board are designed with an all-in-one architecture without connection. The KGEC-6300 is equipped with Intel® Skylake-S/Kabylake-S Core I3/I5/I7 CPU, support for 1* DDR4 2133/2400Mhz, up to 16GB, and the 9th generation Intel® HD Graphics 510/520/610/620 core display.

The KGEC-6300 provides rich IO interfaces, including 1*DP, 1*DVI-I (DVI-D+VGA), 2*LAN, 4*USB3.0, 2*COM. A variety of expansion options, 1*Mini PCIe with PCIe X1+USB signal, with dual SIM card slot, support for dual 4G LTE/Wifi/BT/GPS; 1* full mSATA (SATA+USB) for storage, 1*PCIe X4 slot (T001/2), 1*32bit-PCI slot(T001/2). DC 12~24V wide power input, support wall mounting and Din-Rail mounting. Adopt active and passive cooling design, fan wind speed can be intelligently controlled. BIOS optimized and support real-time system, Ubuntu Preemt-RT, optional support INTime. The extension module and the host are designed with easy disassembly, and the extension quantity is flexible. Different extension modules can be selected for different application scenarios, which are very suitable for Machine Vision, CNC control, Motion control and so on.

1.2 Features

- Intel® Kabylake-S/Skylake-S CPU, up to 65W
- CPU active and passive cooling design
- Intelligent temperature control fan, silent and dustproof
- DVI-I/DP the display signal can be extended without attenuation
- Dual I210 AT network chips, Optional support for a variety of real-time industrial Ethernet protocols
- BIOS optimization and support high real-time system
- 1*PCIe X4 slot, 1*32bit-PCI slot (T001/2)
- Support software development platform (optional)
- DC 12~24V, Wide power supply
- Support wall mounting and Din-Rail mounting

Model No. Specification	KGEC-6300-S001	KGEC-6300-T001	KGEC-6300-T001
CPU	Intel® Skylake-S/Kabylake-S LGA1151 CPU	Intel® Skylake-S/Kabylake-S LGA1151 CPU	Intel® Skylake-S/Kabylake-S LGA1151 CPU
Chipset	Intel®H110	Intel®H110	Intel®H110
Mermory	1*DDR4 最大16GB	1*DDR4 最大16GB	1*DDR4 最大16GB
LAN	2	2	2
USB3.0	4	4	4
COM	2	2	2
DP	1	1	1
DVI-I	1	1	1
PCI	–	1*32bit-PCI\1*PCIe X4 slot(Optional)	1*32bit-PCI
PCIe	–	1*PCIe X4 slot	1*PCIe X4 slot
Mini PCIe	1	1	1
mSATA	1	1	1
Power input	DC 12-24V	DC 12-24V	DC 12-24V

Table 1.1: Features

1.3 Specifications

1.3.1 General

CPU: Intel® Skylake-S/Kabylake-S Core I3/I5/I7 CPU

System Memory: 1*DDR4, 2133/2400MHz, up to 16GB

Watchdog Timer: 255-level interval timer, setup by software

USB: 4*USB3.0, Type A

Serial Ports: 2*RS232/422/485 with TVS isolated (DB9)

Expansion Interface:

1*Mini PCIe with PCIe X1+USB signal, 1*SIM slot, support 1*4G/LTE/Wifi/BT/GPS

1*PCIe X4 slot with PCIe X1 signal (T001/2)

1*32bit-PCI, support motion control card, acceleration card and other functions card (T001/2)

Storage:

1*mSATA (SATA+USB)

1.3.2 Display

Chipset: Intel Gen. 9th Intel HD Graphics

Display Memory: Shared system memory

Resolution: DP:4096*2160@60Hz, DVI-I (DVI-D+VGA) DVI-D max. res. 1920*1200@60Hz, VGA max. res. 2560*1600@60Hz

1.3.3 Ethernet

Chipset: 2*Intel I210AT PCIe Gig. Ethernet

Speed: 10/100/1000 Mbps

Interface: 2*RJ45

1.3.4 Power Consumption

Input Voltage:

DC 12-24V, 2*2-pin Phoenix

Power Consumption: S001(19V/2.3A I7-7700K 4GB) T002(19V/2.6A I7-7700K 4GB)

Power Adapter: AC/DC power adapter, DC19V/6.32A 120W

1.4 Environmental Specifications

Operating temperature: -20~60℃

Relative humidity: 10~90% @ 40℃ (non-condensing)

Storage temperature: -40 ~ 85°C (-40 ~ 185°F)

Vibration loading during operation:

5grms/5~500Hz/random/in working (SSD); 1grms/5~500Hz/random/in working (HDD)

Shock during operation:

50g peak acceleration(11ms duration)(SSD); 20g peak acceleration(11ms duration)(HDD)

EMC/ Certification: CE/FCC Class B


1.5 Order information

Model No.	Introduction
KGEC-6300/S001	Edge controller , Intel® Skylake-S/Kabylake-S LGA1151 CPU, H110 Chipset, 1*DDR4, 2*LAN, 4*USB3.0, 2*COM, 1*Mini PCIe, 1*DVI-I, 1*DP, 1*mSATA, DC 12~24V
KGEC-6300/T001	Edge controlle, Intel® Skylake-S/Kabylake-S LGA1151 CPU, H110 Chipset, 1*DDR4, 2*LAN, 4*USB3.0, 2*COM, 1*PCIe X4/1*32bit-PCI, 1*Mini PCIe, 1*DVI-I, 1*DP, 1*mSATA, DC 12~24V
KGEC-6300/T002	Edge controlle, Intel® Skylake-S/Kabylake-S LGA1151 CPU, H110 Chipset, 1*DDR4, 2*LAN, 4*USB3.0, 2*COM, 1*PCIe X4, 1*32bit-PCI, 1*Mini PCIe, 1*DVI-I, 1*DP, 1*mSATA, DC 12~24V
PA-120DC19	AC/DC power adapter, DC19V/6.32A 120W

1.6 Mechanical Specifications


The KGEC-6300 edge controller is assembled by the splice of The OSBC (single-board computer STX-I952) and the Sub-card (ECX-257) of JHC, and installed in the universal aluminum rectangular profile housing. Among them, sub-card ECX-257 is only assembled in T002.

STX-I952 Front

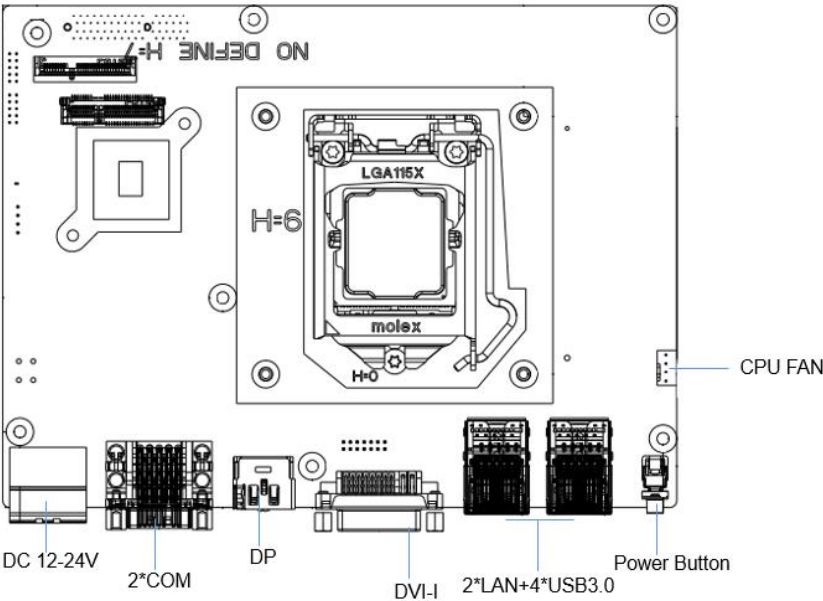


Picture 1.1: STX-I952 Front

STX-I952 Rear

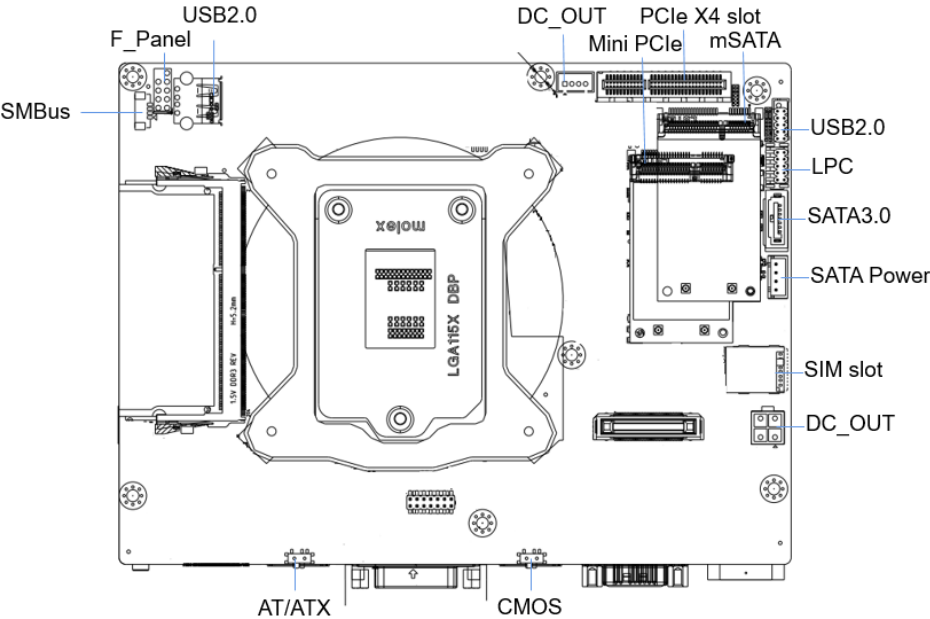


Picture 1.2: STX-I952 Rear

ECX-257 Front (T002)

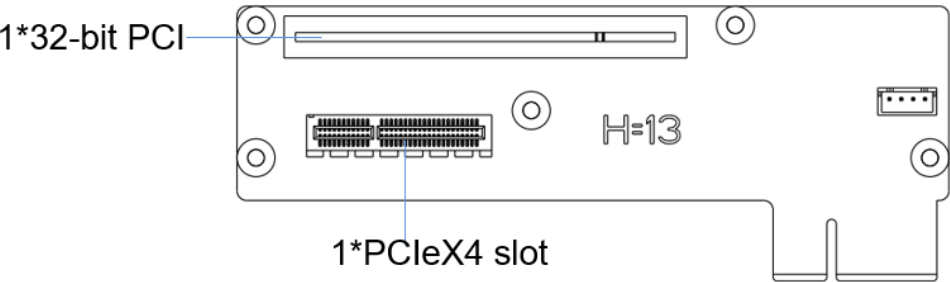


Picture 1.3: ECX-257

KGEC-6300-T002 Front Panel

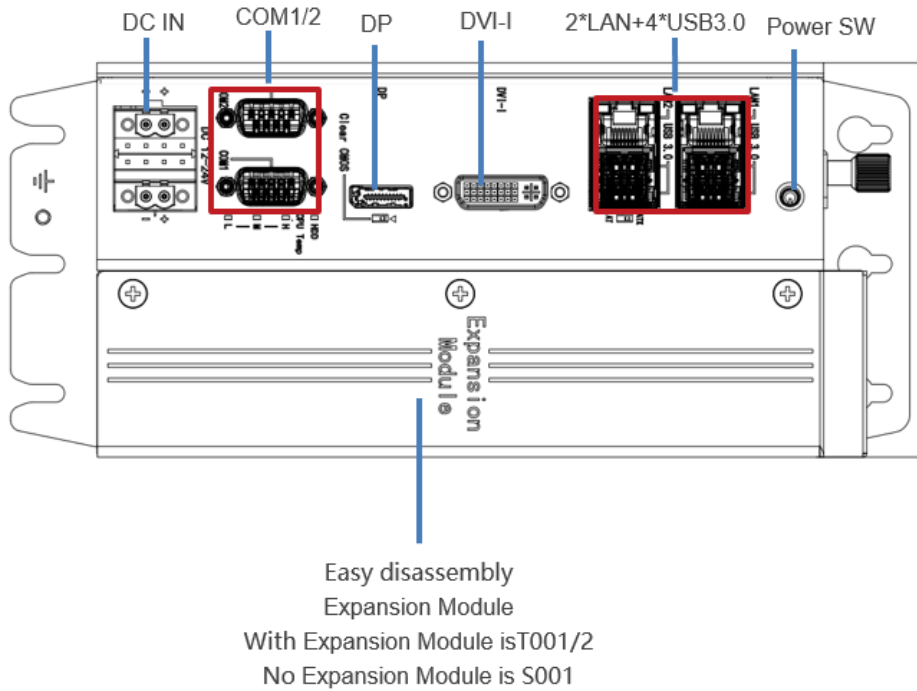

Picture 1.4: KGEC-6300-T002 Front Panel


KGEC-6300-T002 Rear Panel

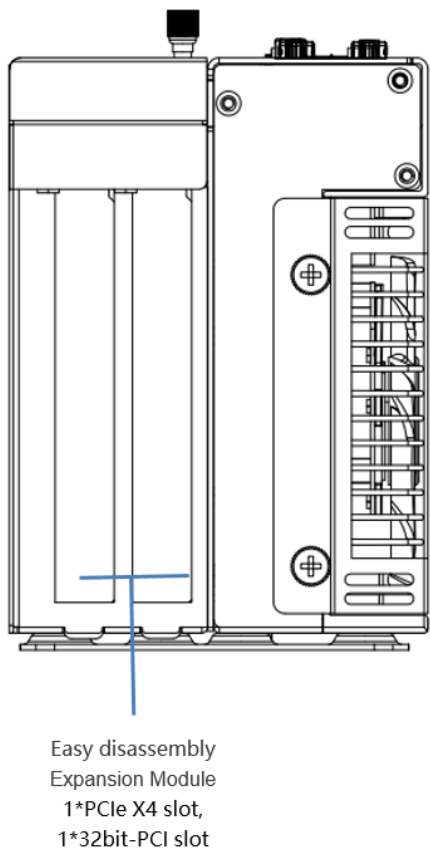

Picture 1.5: KGEC-6300-T002 Rear Panel

KGEC-6300-S001 Dimension :



Unit: mm

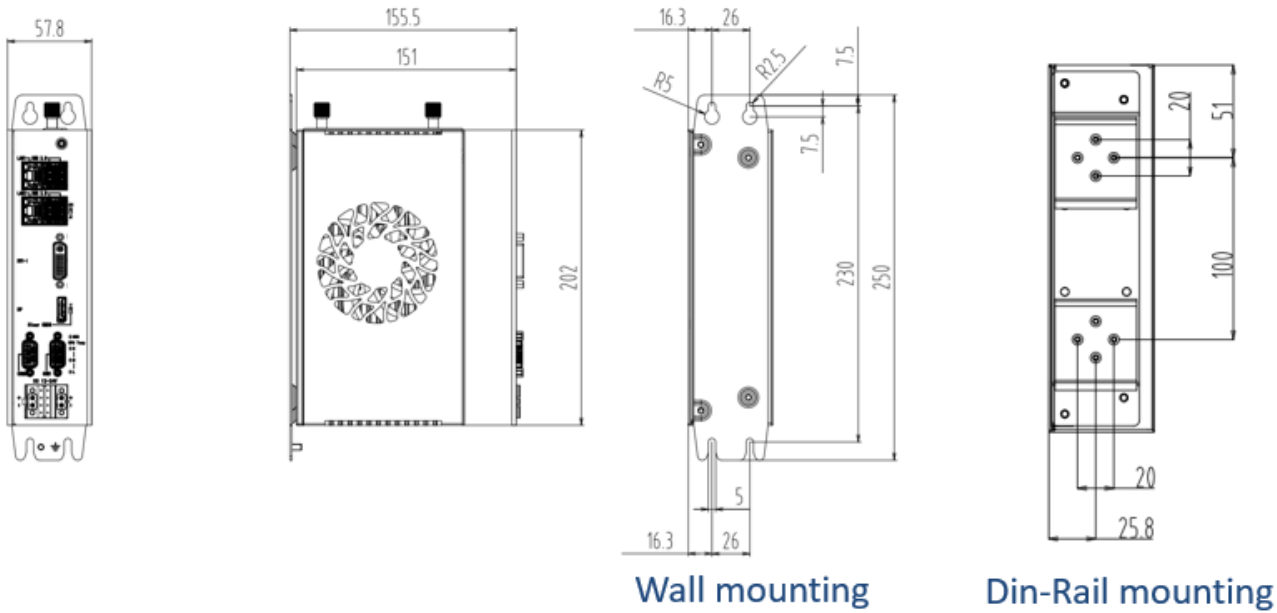

Picture 1.6 KGEC-6300-S001 Dimension

KGEC-6300-T002 Dimension :

Unit: mm

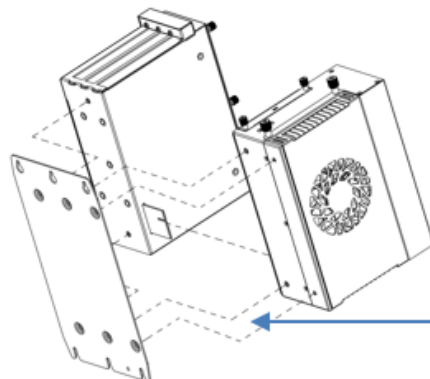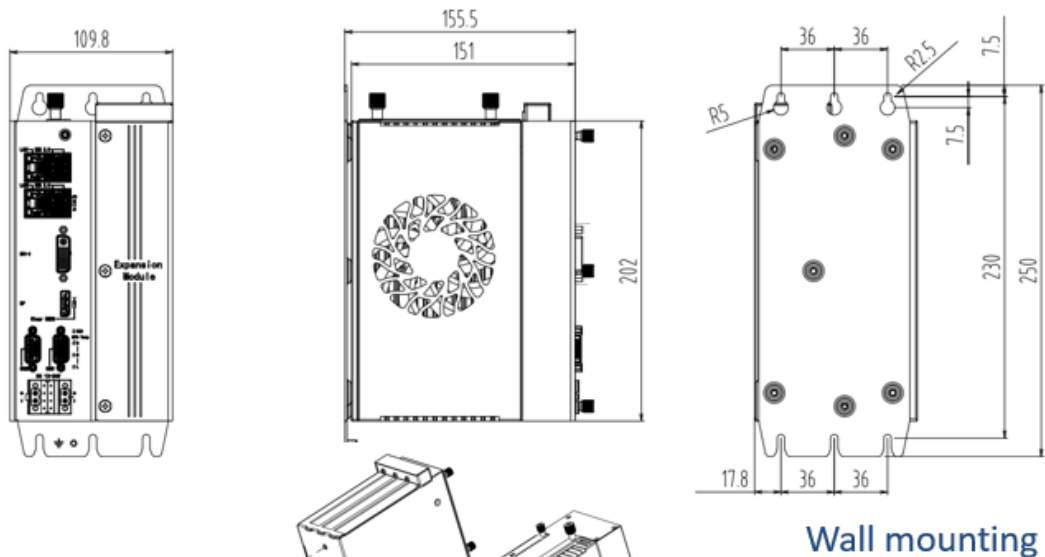

The extension module is connected with the host machine through card slot and mounting bracket for flexible installation and disassembly.

Picture 1.7 KGEC-6300-T002 Dimension

CHAPTER

2



Hardware Installation

2.1 Introduction


The following sections show the internal switch settings and the external connectors and pin assignments for applications.

2.2 Switches

The KGEC-6300 edge controller has a number of switches inside the chassis that allows you to configure your system to suit your application. The table below shows the function of each of the board's switches:

Switcher	Name	Description
CLEAR/CMOS	Clear CMOS Data Setting	3-Pin switch
AT/ATX	Set Power-on mode at AT or ATX	3-Pin switch

2.2.1 CLEAR/COMS -Clear CMOS Data

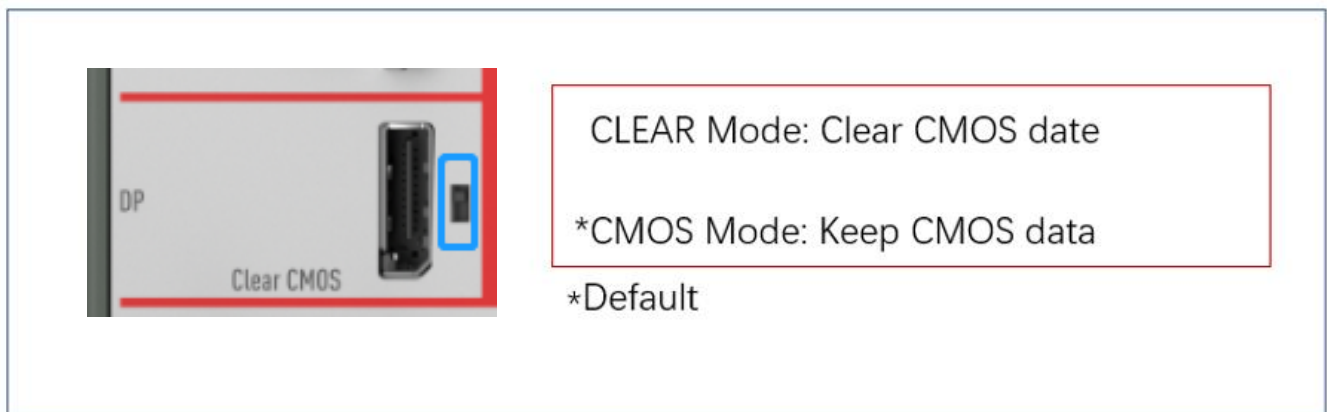

Picture 2.1: CLEAR/COMS

If you encounter the followings


- a) CMOS data becomes corrupted.
- b) You forget the supervisor or user password.

You can reconfigure the system with the default values stored in the ROM BIOS.

To load the default values stored in the ROM BIOS, please follow the steps below.

1. Power-off the system and unplug the power cord.
2. Dial the dip switch to CLEAR mode, stay for 5~6 seconds, and then revert to CMOS mode;
4. Power-On the computer, press the Del key to enter the BIOS setting and reload the optimal default value;
5. Save and exit the Settings.

2.2.2 AT/ATX Power on mode selection

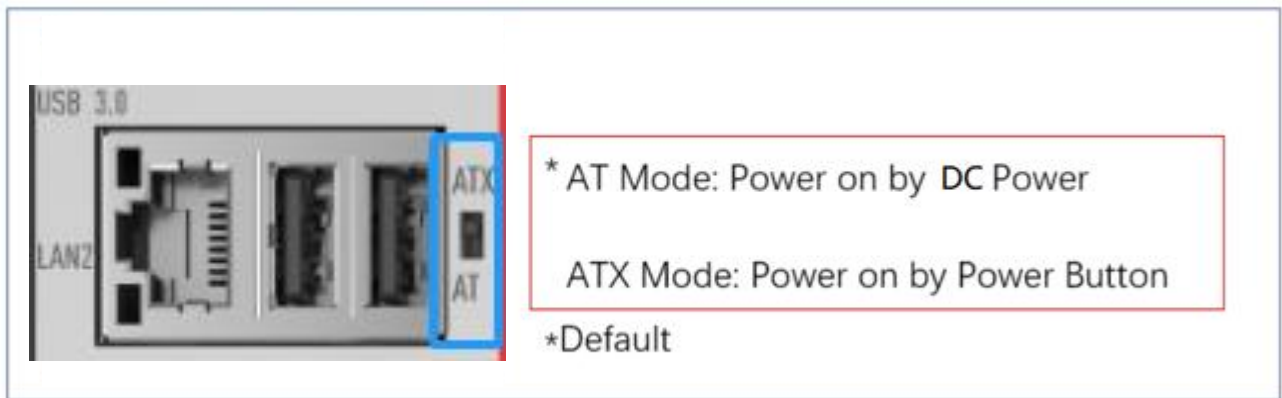


Picture 2.2: AT/ATX

The KGEC-6300 provides an AT/ATX SW, which users can set Power-on mode by it. When you dial it at AT, it means power on by AC Power; When you dial it at ATX, it means power on by Power button.

2.3 I/O/Button/LED Indication

KGEC-6300-T002 Front:

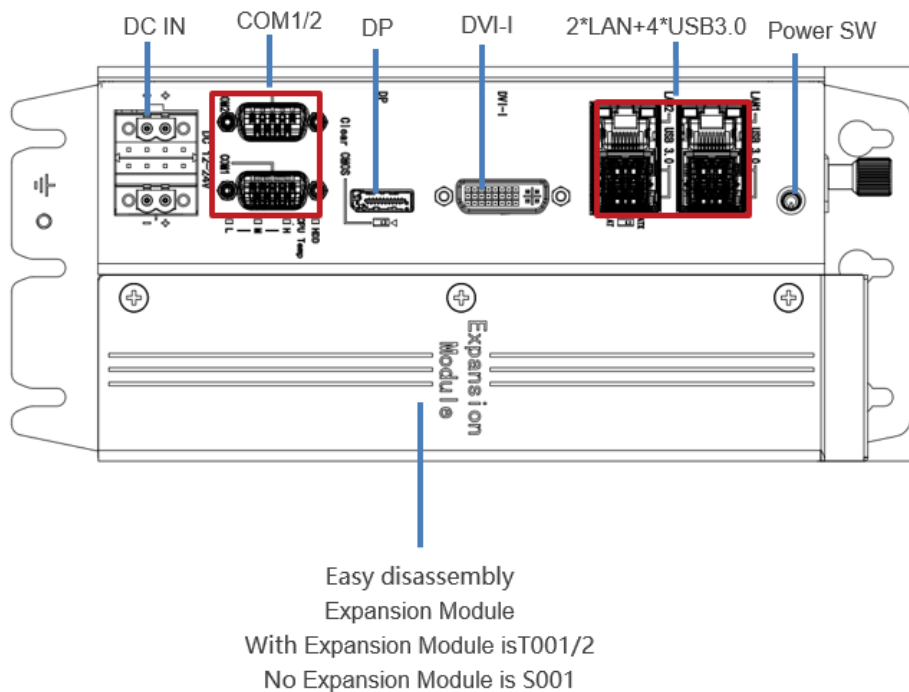


Picture 2.3: KGEC-6300-T002 Front

The front panel contains the I/O interface:

- 1*DC-in Power: 2*2pin phoenix DC12~24V
- 4*USB3.0 Type A
- 1*DP,1*DVI-I
- 2*LAN:RJ45
- 2*COM: DB9

KGEC-6300-T002 Rear :

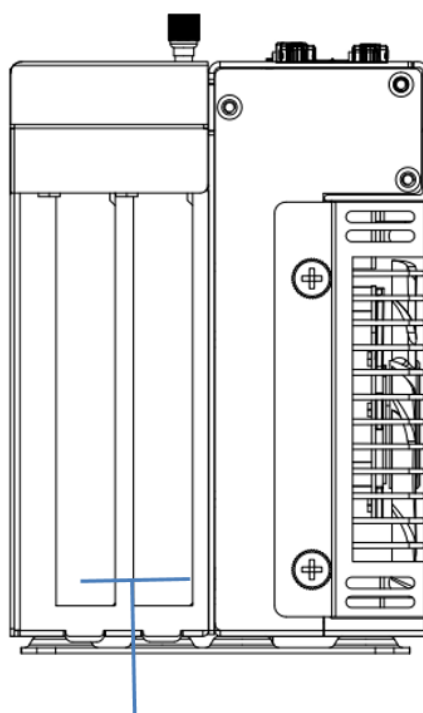

Easy disassembly
Expansion Module
1*PCIe X4 slot,
1*32bit-PCI slot


Picture 2.4: KGEC-6300-T002 Rear

The rear panel contains the I/O interface:

- 1*PCIe X4 slot(T001/2)
- 1*32bit-PCI slot(T001/2)

2.3.1 Ethernet Connector

The KGEC-6300 is equipped with 2*Intel® I210AT, supporting 10/100/1000Mbps rate adaptive. The Ethernet provides the standard RJ-45 interface. Table 2.1 provides a detailed description of pin assignment.




Picture 2.5: LAN

Tabel 2.1: LAN Connector Pin Assignments			
PIn	10/100/1000BaseT Signal	Pin	10/100/1000BaseT Signal
1	TX+(10/100), LAN_DA+(GHz)	5	LAN_DC-(GHz)
2	TX-(10/100), LAN_DA-(GHz)	6	RX-(10/100), LAN_DB-(GHz)
3	RX+(10/100), LAN_DB+(GHz)	7	LAN_DD-(GHz)
4	LAN_DC+(GHz)	8	LAN_DD-(GHz)

2.3.2 USB


The USB device allows data exchange between your computer and a wide range of simultaneously accessible external Plug and Play peripherals.

The KGEC-6300 provides 4*USB3.0, 1*USB2.0 for dongle. The USB interface can be disabled in the system BIOS setup. Table 2.2 for USB3.0 pin assignments.

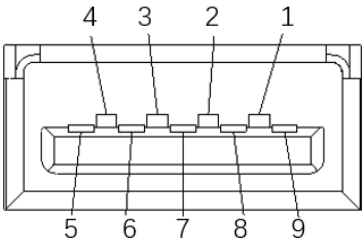

Picture 2.6: USB3.0

Table 2.2: USB3.0 Pin Assignments			
Pin	Signal	Pin	Signal
1	VBUS0	6	RX0+
2	D0-	7	GND
3	D0+	8	TX0-
4	GND	9	TX0+
5	RX0-	Shell	Shield




Picture 2.7: USB2.0

Table 2.3 for USB2.0 pin assignments.

Table 2.3: USB2.0 Pin Assignments			
Pin	Signal	Pin	Signal
1	USB_VCC	2	USB_D-
3	USB_D+	4	USB_GND

2.3.3 DP

The KGEC-6300 provides a high-resolution DP display port. They can support the most resolution up to 4096*2304@60Hz. Table 2.4 for DP pin assignments.

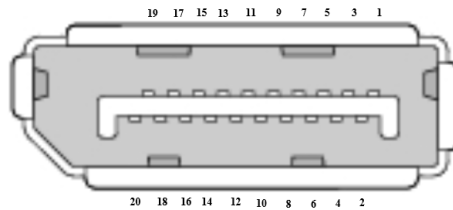


Picture 2.8: DP

Table 2.4: DP Pin Assignments					
Pin	Signal	Pin	Signal	Pin	Signal
1	DATA0_P	8	GND	15	AUXP
2	GND	9	DATA2_N	16	GND
3	DATA0_N	10	DATA3_P	17	AUXN
4	DATA1_P	11	GND	18	HPD
5	GND	12	DATA3_N	19	GND
6	DATA1_N	13	CTRL	20	PWR
7	DATA2_P	14	GND		

2.3.4 DVI-I

The KGEC-6300 provides a DVI-I display port with DVI-D and VGA signal. The DVI-D can support the most resolution up to 1920*1200@60Hz, The VGA can support the most resolution up to 2560*1600@60Hz. Table 2.5 for DVI-I pin assignments.

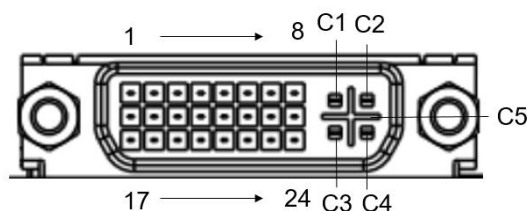


Picture 2.9: DVI-I

Table 2.5: DVI-I Pin Assignments			
Pin	Signal	Pin	Signal
1	CPU_TMDS_TN2_C	2	CPU_TMDS_TP2_C
3	VGA_DET	4	VGA_SCL_C
5	VGA_SDA_C	6	DDC_CPU_CLK_L
7	DDC_CPU_DATA_L	8	MONVSYNC
9	CPU_TMDS_TN1_C	10	CPU_TMDS_TP1_C
11	GND	12	NC
13	NC	14	+5VS_HDMI_I3
15	GND	16	HDMI_HPD3
17	CPU_TMDS_TN0_C	18	CPU_TMDS_TP0_C
19	GND	20	NC
21	NC	22	GND
23	CPU_TMDS_CLKP_C	24	CPU_TMDS_CLKN_C
C1	MONRED	C2	MONGREEN
C3	MONBLUE	C4	MONHSYNC
C5	GND		

2.3.5 Power input (DC-IN)

The KGEC-6300 provides a 2*2Pin Phoenix for DC 12-24V power input. The power input use a double-layer power socket, and the upper and lower layers can be used as power input or output separately, and it is also connected in parallel with the built-in DC_OUT circuit. Table 2.6 for DC-IN pin assignments.

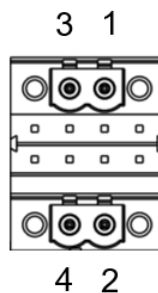


Picture 2.10: DC-IN

Table 2.6: DC12-24V Pin Assignments			
Pin	Signal	Pin	Signal
1	GND	2	GND
3	DC_6_48	4	DC_6_48

2.3.6 COM

The KGEC-6300 provides 2*COM1/2 with TVS isolated serial ports through the 2* d-sub 9-pin connector. COM1/2 can be configured as RS232/422/485, Table 2.1 for COM pin assignments.




Picture 2.11: COM

Table 2.7: COM1/COM2 Pin Assignments			
Pin	RS-232 signal	RS-422 signal	RS-485 signal
1	DCD	TX-	DATA-
2	RxD	TX+	DATA+
3	TxD	RX+	NC
4	DTR	RX-	NC
5	GND	GND	GND
6	DSR	NC	NC
7	RTS	NC	NC
8	CTS	NC	NC
9	RI	NC	NC

2.3.7 Mini PCIe

The KGEC-6300 mainboard (STX-I952) provides 1*Mini PCIe pin spacing 9.9mm interface, with PCIe X1+USB signal, with dual SIM card slot, support for dual 4G LTE/Wifi/BT/GPS. The Mini PCIe interface definition is shown in table 2.8.

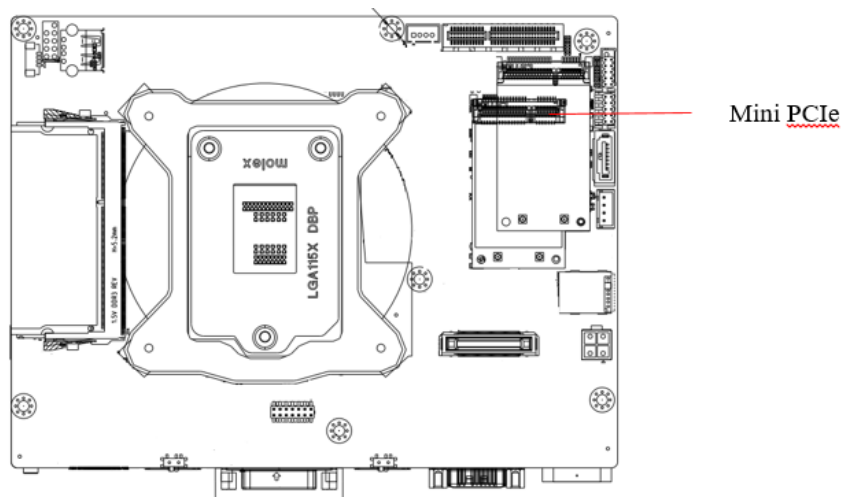


Picture 2.12: Mini PCIe

Table 2.8: Mini-PCIe Pin Assignments			
Pin	Signal	Pin	Signal
1	NC	2	+3V
3	NC	4	GND
5	NC	6	1.5V_2
7	NC	8	SIM_PWR
9	GND	10	SIM1_DATA
11	CLK_PE_PORT7_N	12	SIM1_CLK
13	CLK_PE_PORT7_P	14	SIM1_RESET
15	GND	16	+VUIM_VPP
17	NC	18	GND
19	NC	20	+3V
21	GND	22	PERST
23	PCIE7_RX_N	24	+3V
25	PCIE7_RX_P	26	GND
27	GND	28	1.5V_1
29	GND	30	SMBCLK
31	PCIE7_TX_N	32	SMBDAT
33	PCIE7_TX_P	34	GND
35	GND	36	USB_D-
37	GND	38	USB_D+
39	+3V	40	GND
41	+3V	42	NC
43	GND	44	NC
45	NC	46	NC
47	NC	48	1.5V
49	NC	50	GND
51	NC	52	+3V

2.3.8 mSATA

The KGEC-6300 provides a standard full- mSATA interface with SATA+USB signal for storage. Table 2.9 provides a detailed description of pin assignment.

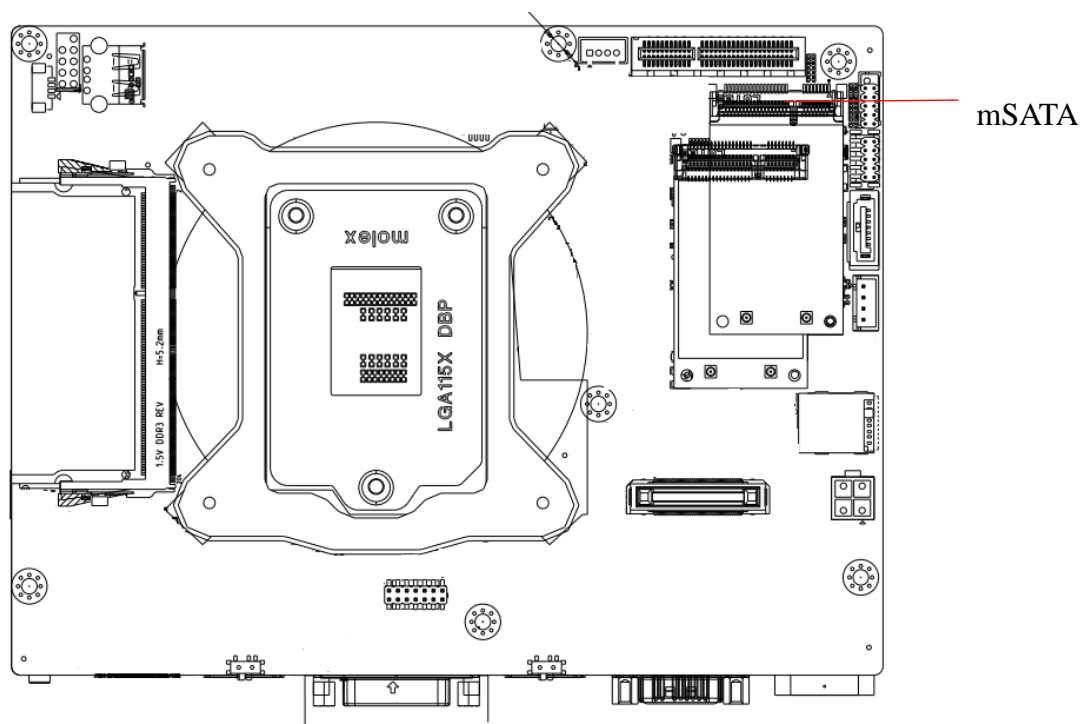

Picture 2.13: mSATA


Table 2.9: mSATA Pin Assignments

Pin	Signal	Pin	Signal
1	NC	2	+3V
3	NC	4	GND
5	NC	6	1.5V_2
7	NC	8	LCP_FRAME-
9	GND	10	L_AD3
11	NC	12	L_AD2
13	NC	14	L_AD1
15	GND	16	L_AD0
17	PLTRST1_N	18	GND
19	DEBUG_CARD_CL1	20	NC
21	GND	22	NC
23	SATA3_RX_P1	24	+3V
25	SATA3_RX_N1	26	GND
27	GND	28	1.5V_1
29	GND	30	SMBCLK
31	SATA3_TX_N1	32	SMBDAT
33	SATA3_TX_P1	34	GND

35	GND	36	USB_D-
37	GND	38	USB_D+
39	+3V	40	GND
41	+3V	42	NC
43	GND	44	NC
45	NC	46	NC
47	NC	48	1.5V
49	NC	50	GND
51	NC	52	+3V

2.3.9 PCI (T002)


The KGEC-6300-T002 provides 1* PCI extension slots through the sub-card ECX-257 for connecting PCI extension devices, such as motion control cards、Data acquisition cards, etc., with an extension card length not exceeding 300mm.

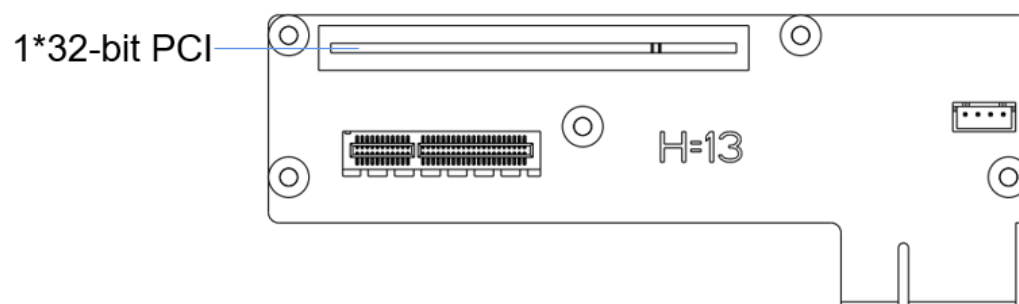

Picture 2.14: PCI

2.3.10 PCIeX4 (T002)

The KGEC-6300-T002 provides a non-standard PCIe X4 expansion slot with PCIe+USB3.0 signal, supporting flexible expansion function cards. Table 2.10 provides detailed pin allocation.

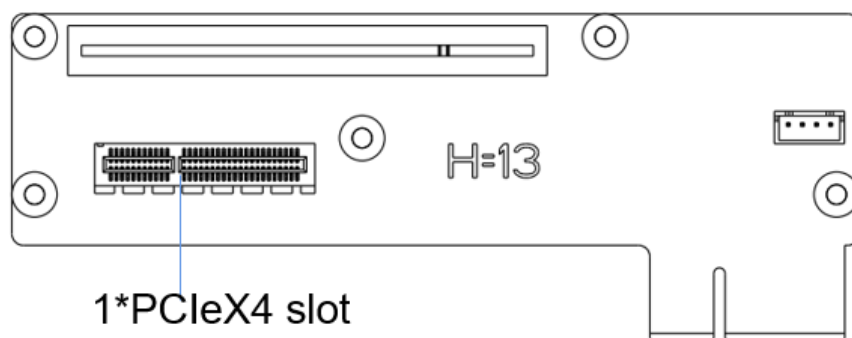


Picture 2.15: PCIeX4

Table 2.14: PCIe X4 Pin Assignments			
Pin	Signal	Pin	Signal
B1	12V_1(P)	A1	PRSNT1#(B)
B2	12V_2(P)	A2	12V_4(P)
B3	12V_3(P)	A3	12V_5(P)
B4	GND_1(P)	A4	GND_3(P)
B5	SMCLK(B)	A5	JTAG2(B)
B6	SMDAT(B)	A6	JTAG3(B)
B7	GND_2(P)	A7	JTAG4(B)
B8	3_3V_1(P)	A8	JTAG5(B)
B9	JTAG1(B)	A9	3_3V_2(P)
B10	3_3VAUX(I)	A10	3_3V_3(P)
B11	WAKE*(B)	A11	PERST#
B12	RSVD_1(B)	A12	GND_7(P)
B13	GND_4(P)	A13	REFCLK+(I)
B14	HSOP0(I)	A14	REFCLK-(I)
B15	HSOP0(I)	A15	GND_8(P)
B16	GND_5(P)	A16	HSIP0(O)
B17	PRSNT2#_1(I)	A17	HSIN0(O)
B18	GND_6(P)	A18	GND_9(P)
B19	HSOP1(I)	A19	RSVD_3(B)
B20	HSOP1(I)	A20	GND_16(P)
B21	GND_10(P)	A21	HSIP1(O)
B22	GND_11(P)	A22	HSIN1(O)
B23	HSOP2(I)	A23	GND_17(P)

B24	HSOP2(I)	A24	GND_18(P)
B25	GND_12(P)	A25	HSIP2(O)
B26	GND_13(P)	A26	HSIN2(O)
B27	HSOP3(I)	A27	GND_19(P)
B28	HSOP3(I)	A28	GND_20(P)
B29	GND_14(P)	A29	HSIP3(O)
B30	RSVD_2(B)	A30	HSIN3(O)
B31	PRSENT2#_2(I)	A31	GND_21(P)
B32	GND_15(P)	A32	RSVD_4(B)

2.3.15 LED

The KGEC panel has one power indicator, one hard disk indicator, three network connection status indicators, and three CPU operating temperature indicators. When the CPU operating temperature $\leq 85^{\circ}\text{C}$, the green light; When the CPU temperature is between 86°C and 95°C , the yellow light is on, and when the CPU operating temperature is $\geq 96^{\circ}\text{C}$, the red light is on. If you keep the CPU running at a red light, it will affect the life of the machine.

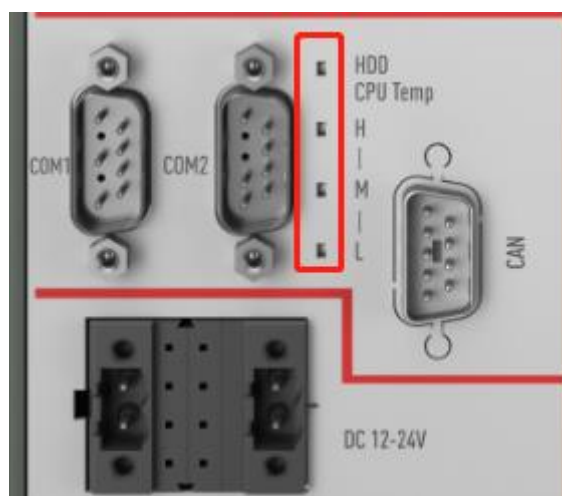

Picture 2. 16: HDD/CPU/LAN LED

2.4 Installation

2.4.1 mSATA installation

Step 1: Unscrew 2 screws on the bottom cover and remove the baffle plate

Step 2: Insert the mSATA module and turn the screws

Step 3: Use the opposite steps to complete the installation of the machine



Picture 2.17: mSATA installation (1)



Picture 2.18: mSATA installation (2)

2.4.2 Mini PCIe installation

Step 1: it is consistent with Mini PCIe module installation steps. For details, please refer to "2.4.1 mSATA installation".



Picture 2.19: Mini PCIe installation (1)

2.4.3 PCI installation (T001/2)


Step 1: Unscrew the 3 screws on the extension module and remove the cover plate.



Picture 2.20: PCI installation (1)

Step 2: Unscrew the 1 screw on the expansion slot baffle and remove the baffle bar.

Step 3: Insert the PCI extension module into the extension slot.

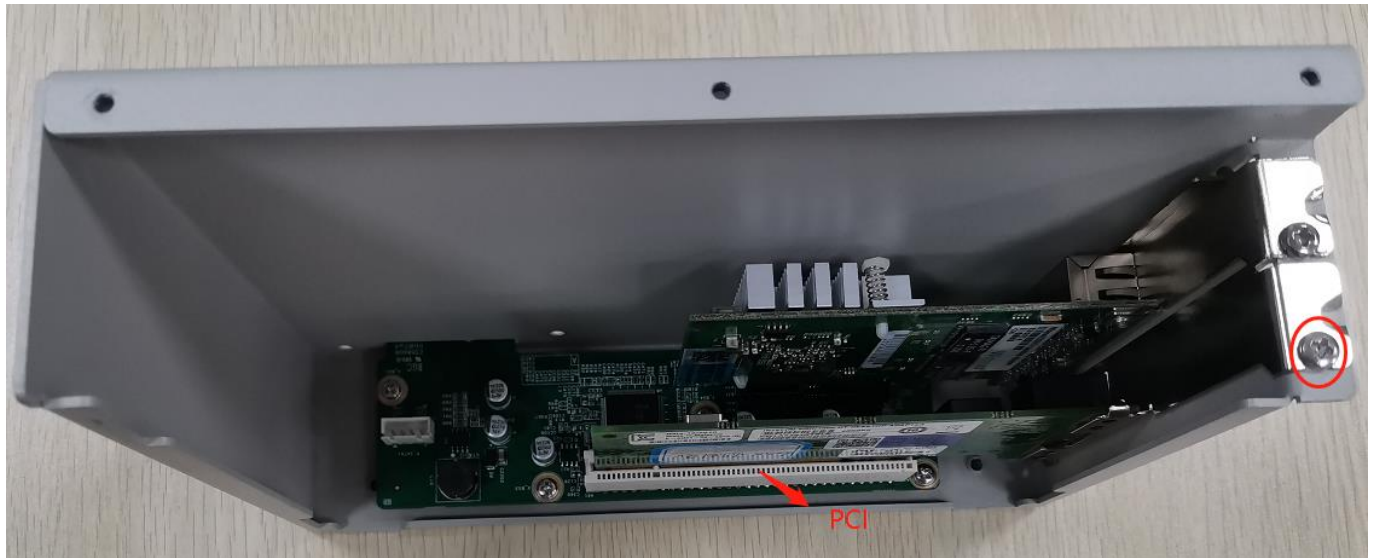

Picture 2.21: PCI installation (2)

Step 4: Close the cover plate of the extension module and tighten the 3 screws.

2.4.4 PCIX4 installation (T001/2)

Step 1: it is consistent with PCIeX4 module installation steps. For details, please refer to "2.4.3 PCI installation".



Picture 2.22: PCIeX4 installation (1)



CHAPTER

3

BIOS Setup

3.1 BIOS Description

BIOS is the communication bridge between hardware and software. How to correctly set the BIOS parameters is crucial for the system to work stably and whether the system works at its best.

This chapter describes how to change the system settings through the BIOS settings.

Note: For the purpose of better product maintenance, the manufacture reserves the right to change the BIOS items presented in this manual. The BIOS setup screens shown in this chapter are for reference only and may differ from the actual BIOS.

You need to make SETUP settings as follows:

1. An error message appears on the screen during the system self-test and asks for the SETUP setting.
2. You want to change the factory default settings based on customer characteristics.


(But in general, customers are not recommended to set it up. In most cases, using the default value is already the best setting.)

The BIOS Setup Utility enables you to configure:

- Hard drives, diskette drives and peripherals
- Video display type and display options
- Password protection from unauthorized use
- Power Management features

3.1.1 Entering the Setup Utility

When you power on the system, BIOS enters the Power-On Self-Test (POST) routines. POST is a series of built-in diagnostics performed by the BIOS. After the POST routines are completed, Press the “**DEL**” key to enter BIOS Setup Utility.

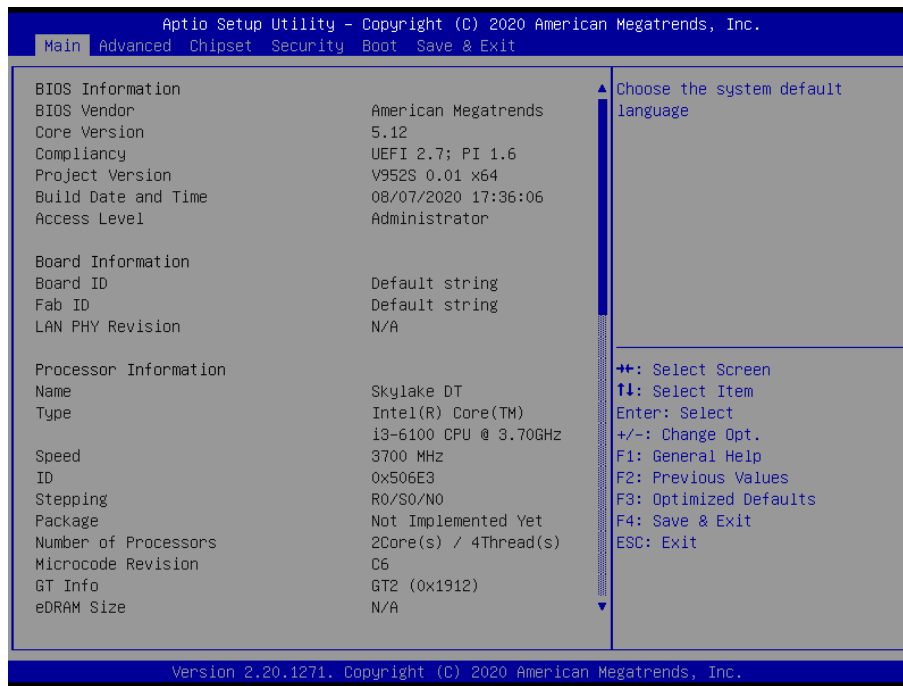

3.2 BIOS parameter settings

When you start the Setup Utility, the main menu appears. The main menu of the Setup Utility displays a list of the options that are available. A highlight indicates which option is currently selected. Use the cursor arrow keys to move the highlight to other options. When an option is highlighted, execute the option by pressing <Enter>.

Some options lead to pop-up dialog boxes that prompt you to verify that you wish to execute that option. Other options lead to dialog boxes that prompt you for information.

Some options (marked with a triangle ►) lead to submenus that enable you to change the values for the option. Use the cursor arrow keys to scroll through the items in the submenu.

In this manual, default values are enclosed in parenthesis. Submenu items are denoted by a triangle ►.

The default BIOS setting for this motherboard apply for most conditions with optimum performance. We do not suggest users change the default values in the BIOS setup and take no responsibility to any damage caused by changing the BIOS settings.

3.2.1 BIOS Navigation Keys


Enter the SETUP settings interface, The BIOS navigation keys are listed below:

Table 3.1: The BIOS navigation keys	
KEY	FUNCTION
ESC	Exit the current menu
↑↓→←	Scrolls through the items on a menu
+/-	Change Opt.
Enter	Select
F1	General Help
F2	Previous Values
F3	Optimized Defaults
F4	Save & Exit

3.2.2 Main Menu

When you enter the BIOS Setup program, the main menu appears, giving you an overview of the basic system information. Select an item and press <Enter> to display the submenu. Press <Esc> to back to the main menu.

The BIOS setup program provides a help screen. You can call up this help screen from any menu by simply pressing the <F1> key. This help screen lists the corresponding keys and possible selections. Press <Esc> to exit the help screen.

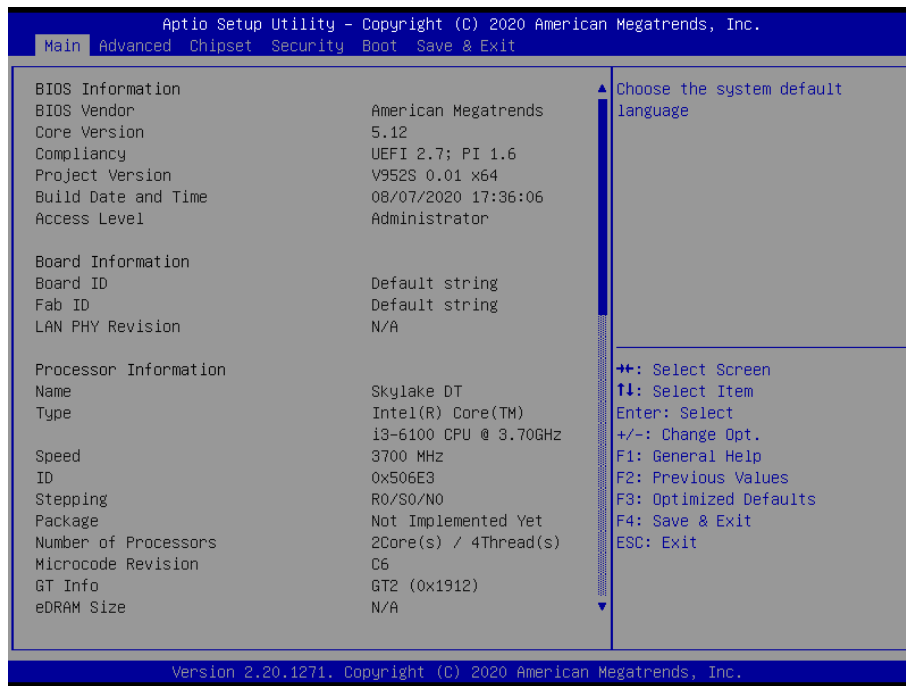

BIOS Vendor (American Megatrends)

This item shows the information of the BIOS vendor.

Core Version (5.13)

This item shows the information of the Core Version.

Project Version (V909S 0.01 X64)

This item shows the information of the motherboard Version.

Build Date and Time

This item shows the information of the BIOS build date and time

Processor Information

This item shows the basic information about the currently used processor, including name, type, speed.

IGFX VBIOS Version

This item shows the Current VBIOS version of the CPU integrated graphics.

Total Memory

This item shows the total memory size of the current motherboard.

Memory Frequency

This item shows the current memory operating frequency.

PCH Information

This item shows the basic information about PCH, including name, PCH SKU, etc.

System Language

Set the language interface of the BIOS.

System Date


Set the date. The format of the date is <week><month><day><year>.

System Time

Set the time. The format of the time is <hour><minute><second>.


3.2.3 Advanced Menu

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

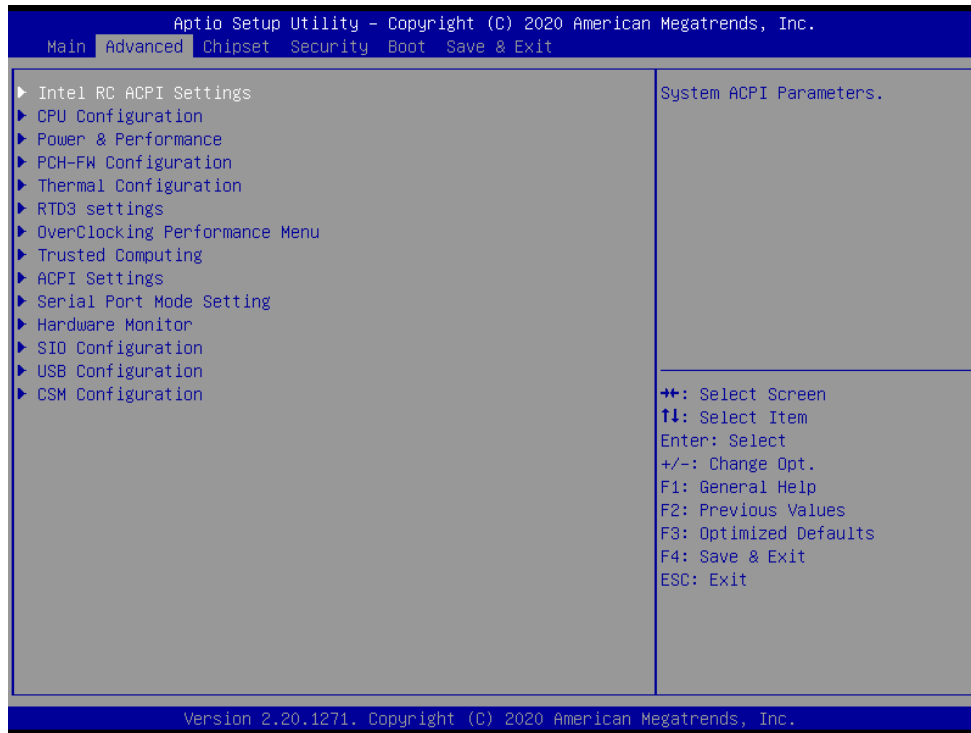



►CPU Configuration



The configuration of the central processor, enter this sub-menu, there will be detailed details of the CPU, as well as various settings of the CPU.

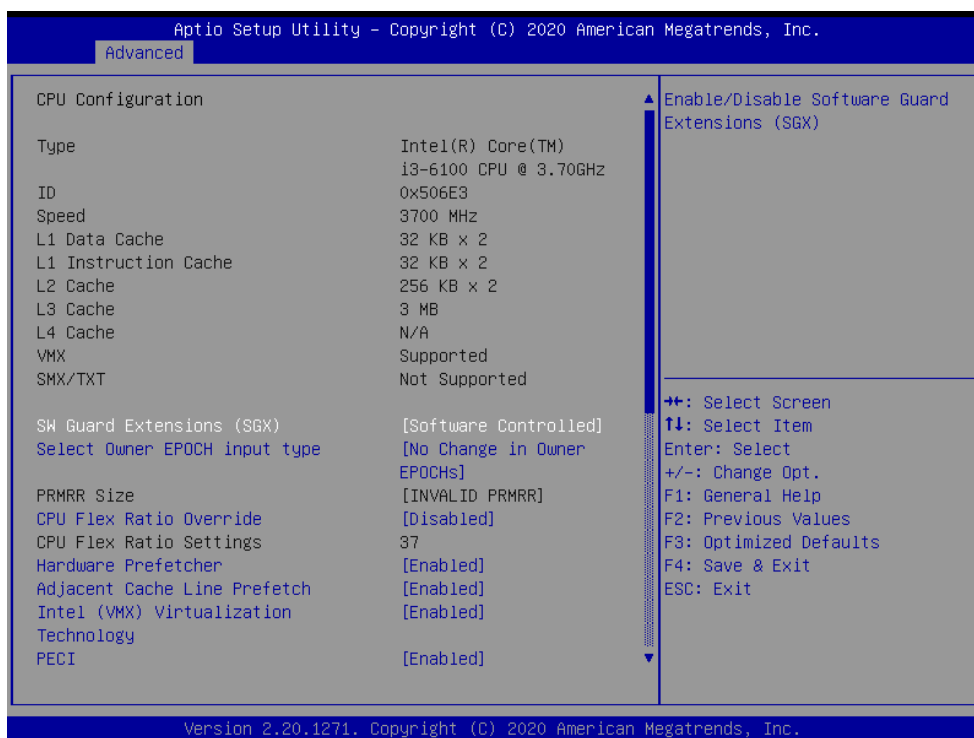

►Power & Performance


This item in the menu shows how to set the Power Management Control of CPU and GT.

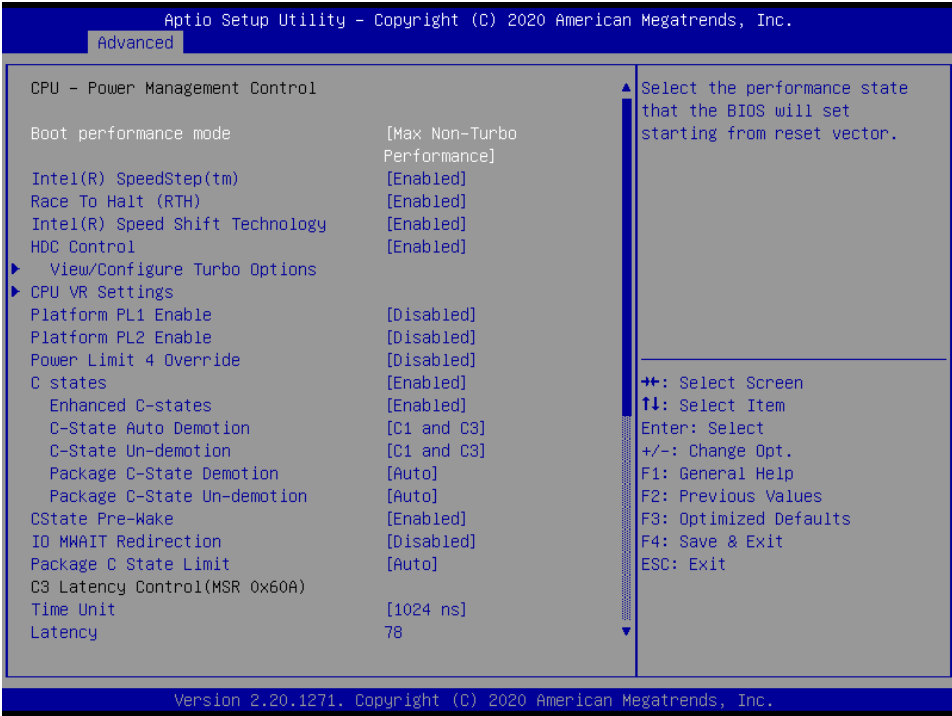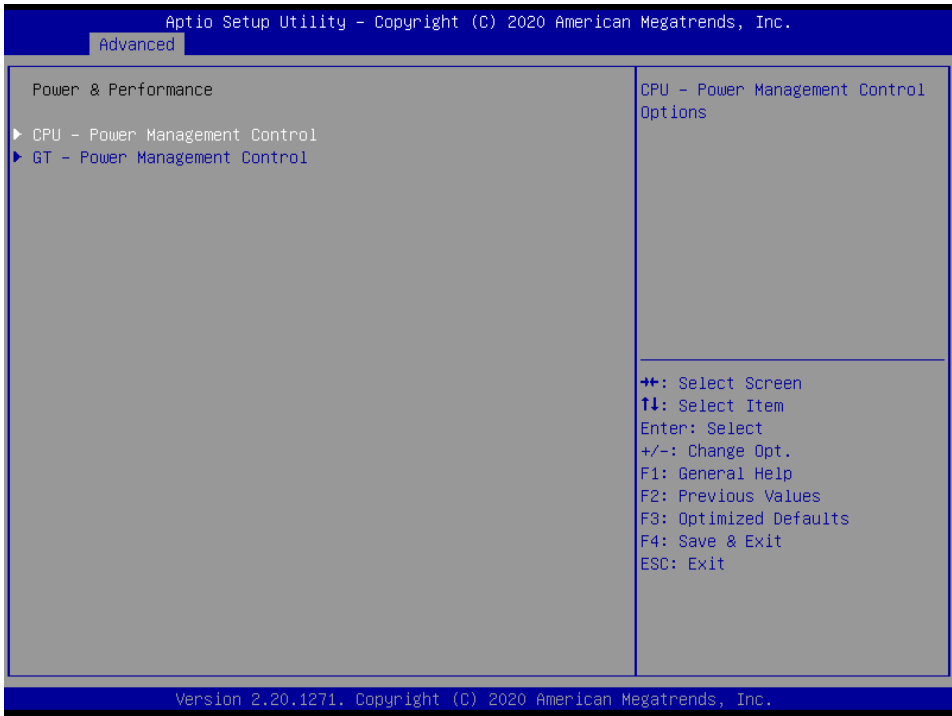

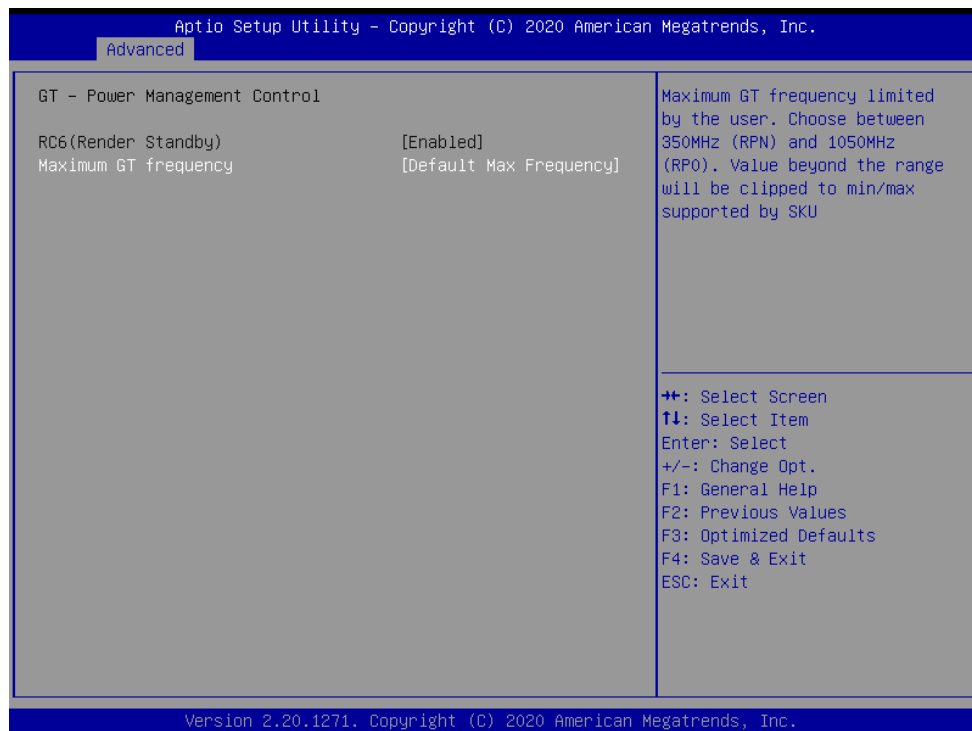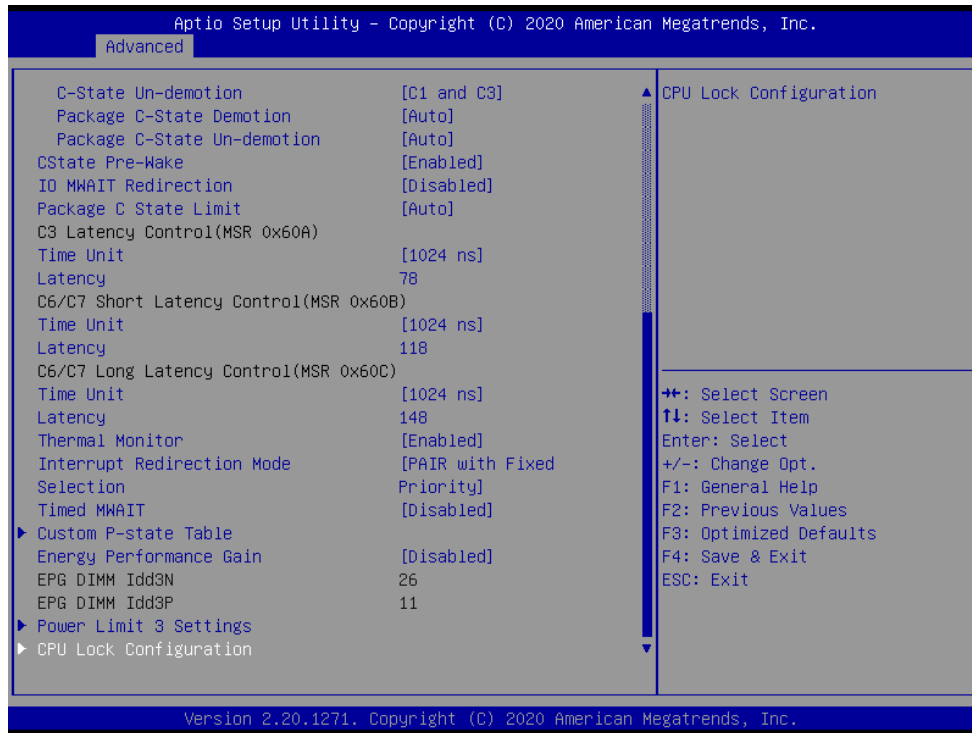


▶Trusted Computing

Trusted computing, enter this sub-menu, there will be the setting of the encryption security module (the motherboard will install the encryption module hardware will take effect)

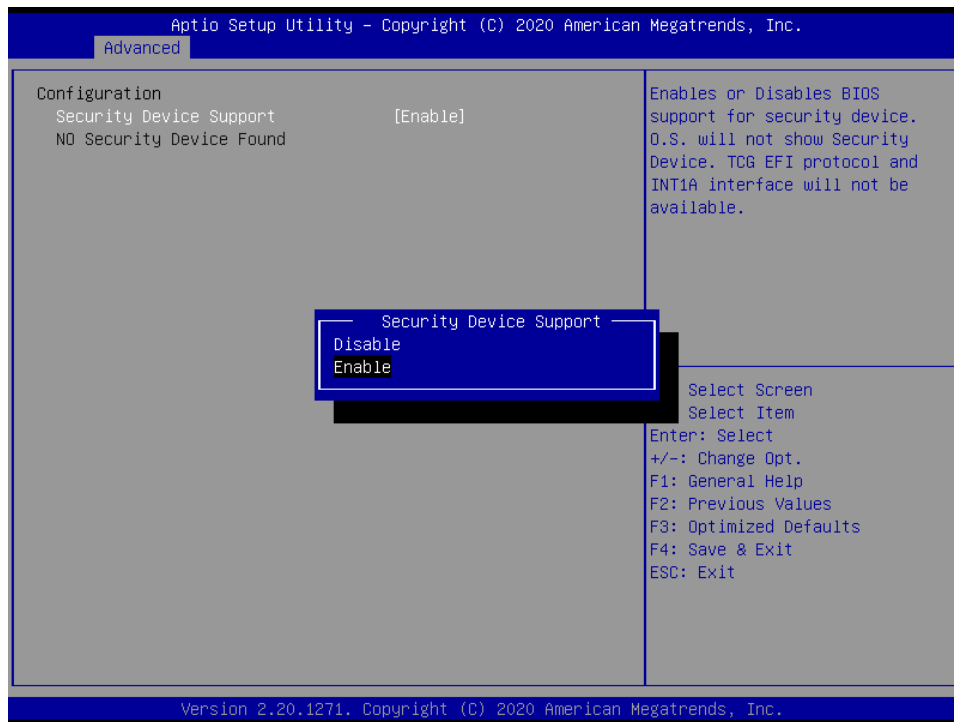

►ACPI Settings

Advanced configuration and power management interface settings, enter this submenu, there will be ACPI related settings.

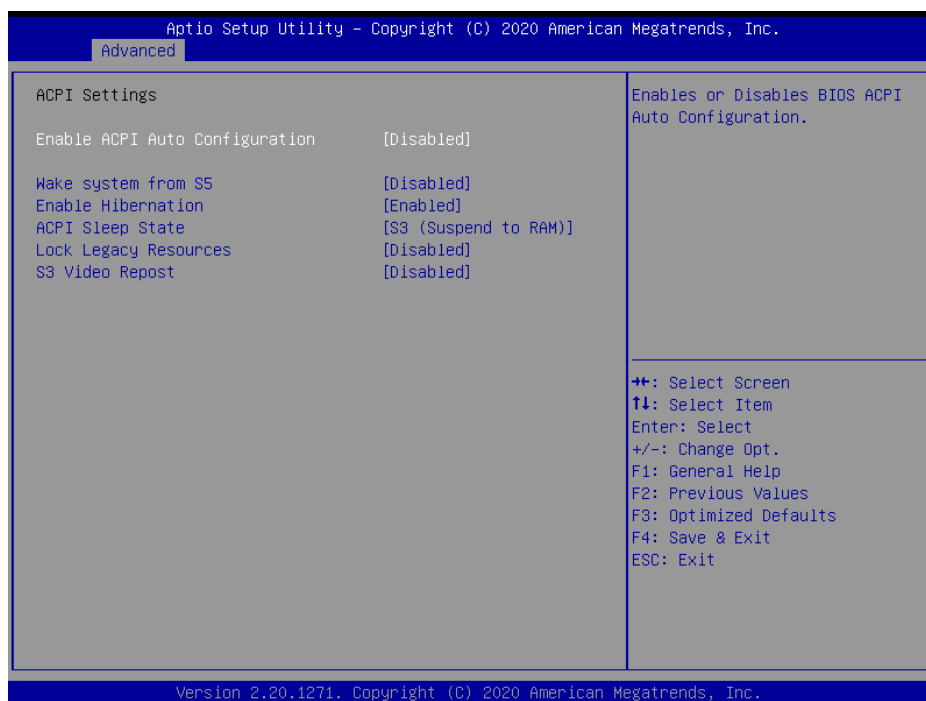

ACPI Sleep State (S3 (Suspend to RAM))

This item allows user to enter the ACPI S3 (Suspend to RAM) Sleep State (default).

Press <Esc> to return to the Advanced Menu page.


►SIO Configuration setting

Super IO Configuration settings, enter this sub-menu, there will be set COM working mode or disabled the Serial port function.




►Hardware Monitor

Hardware monitoring, enter this sub-menu, there will be CPU temperature, System temperature, status display of each common working voltage.

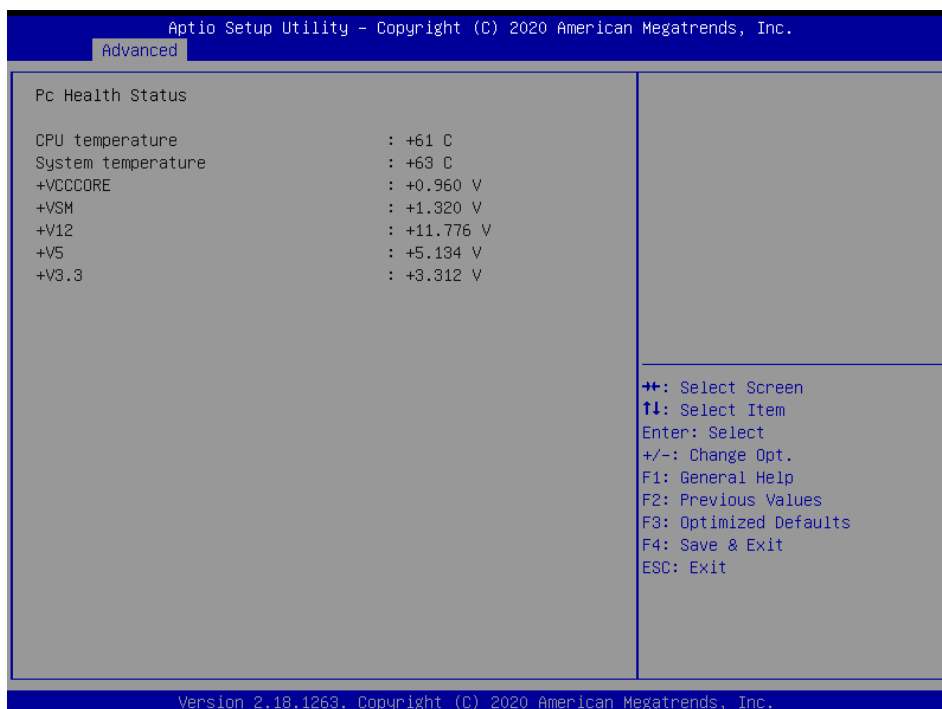

►CSM Configuration

CSM (Compatibility Support Module) configuration, enter this sub-menu, there will be various settings to support UEFI startup and non-UEFI startup. If you need to start the traditional MBR device, you need to enable CSM. Turning off the CSM turns it into a pure UEFI boot.

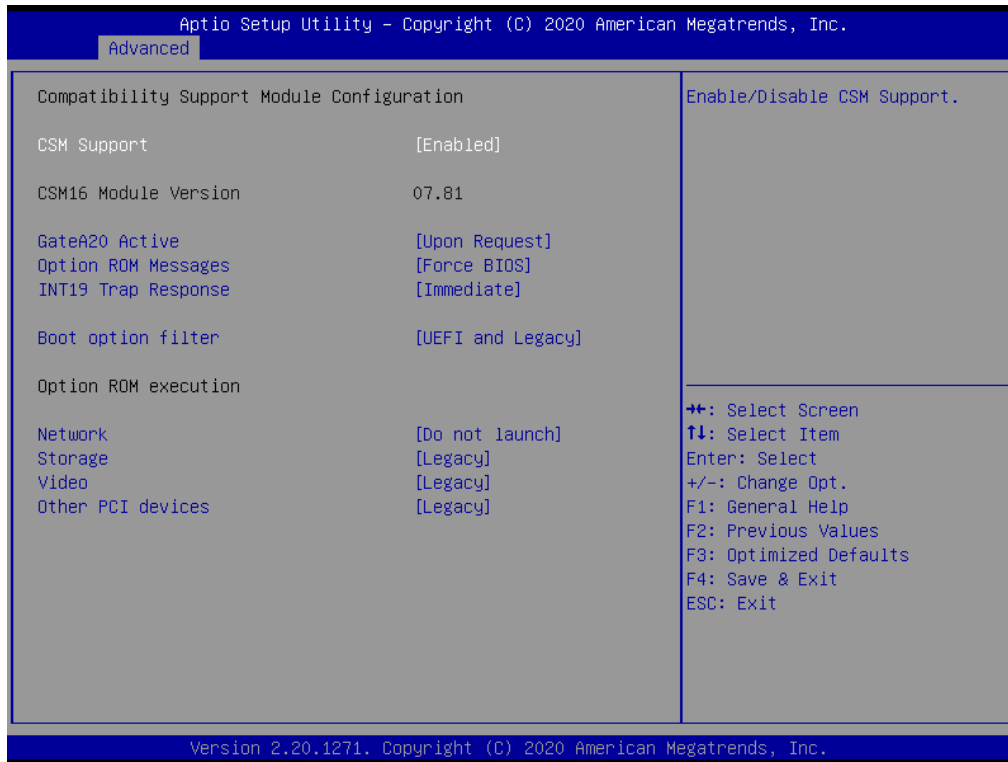

CSM Support

Compatibility Support Module, which is a compatibility module, is a special module of UEFI and provides compatibility support for system that do not support UEFI.

GateA20 Active

This item indicates whether to disable GA20 through the BIOS server or keep the activation status all the time.

Option ROM Messages

This item shows the display mode of option ROM Message.

Boot option filter

This item indicates the boot priority of controlling EFI or Legacy option ROM.

Network

This item is used to set the EFI network card Option ROM boot or the traditional network card Option ROM boot or priority boot.

Storage

This item is used to set the EFI storage Option ROM boot or the traditional storage Option ROM boot.

Video


This item is used to set EFI display Option ROM startup or traditional display Option ROM startup.

Other PCI devices

This item is used to set the EFI PCI device Option ROM boot or the traditional PCI device Option ROM boot.

►USB Configuration

USB configuration, enter this sub-menu, there will be USB-related detailed settings.

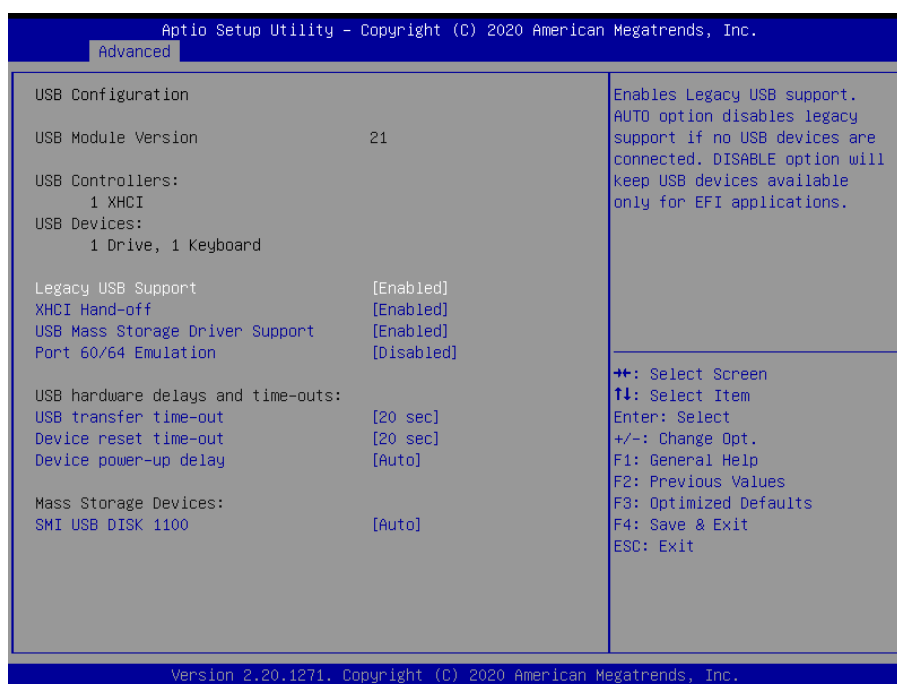

Legacy USB Support

This item is used to set the USB interface support. If you need to support USB devices under DOS, such as U disk, USB keyboard, etc., set this item to [Enabled]. Otherwise, select [Disabled].

USB Mass Storage Driver Support

USB mass storage device support switch.

USB Transfer time-out

This item Sets the timeout period for control, batch, and interrupt transmission. The default is 20 seconds.

Device reset time-out


This item sets boot command timeout of the large capacity USB disk. The default is 20 seconds.

Device power-up delay

This item sets boot command delay of the large capacity USB disk. The default is Auto.


3.2.4 Chipset Menu

The chipset menu items allow you to change the settings for the North Bridge chipset, South Bridge chipset and other system.

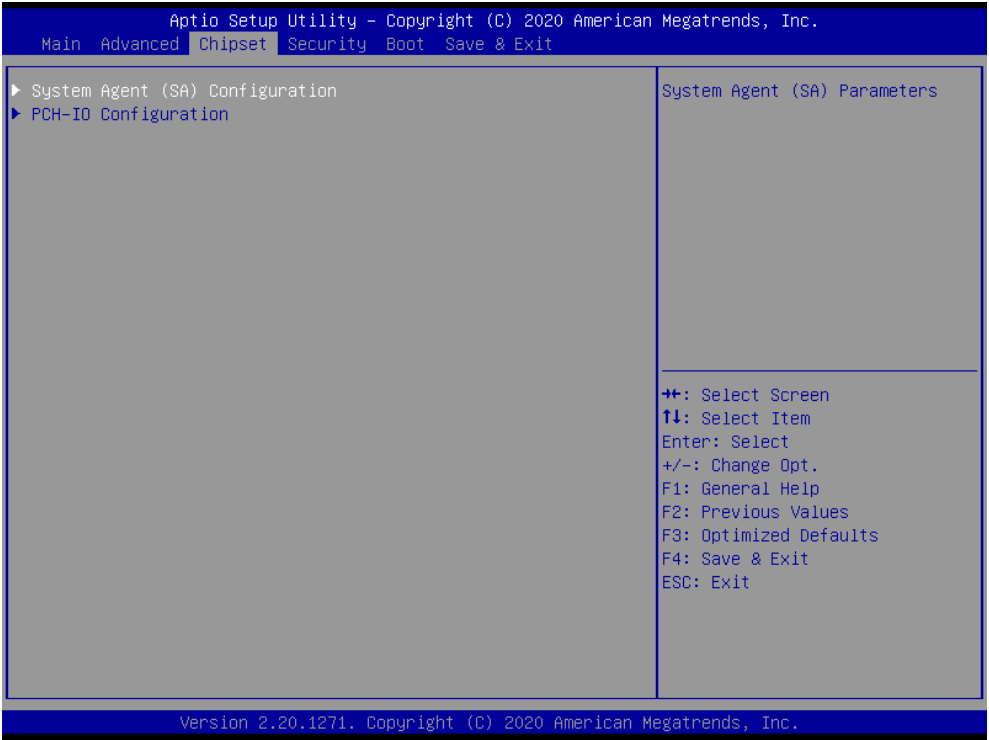


▶Memory Configuration

Memory configuration, enter this submenu, there will be detailed memory information.

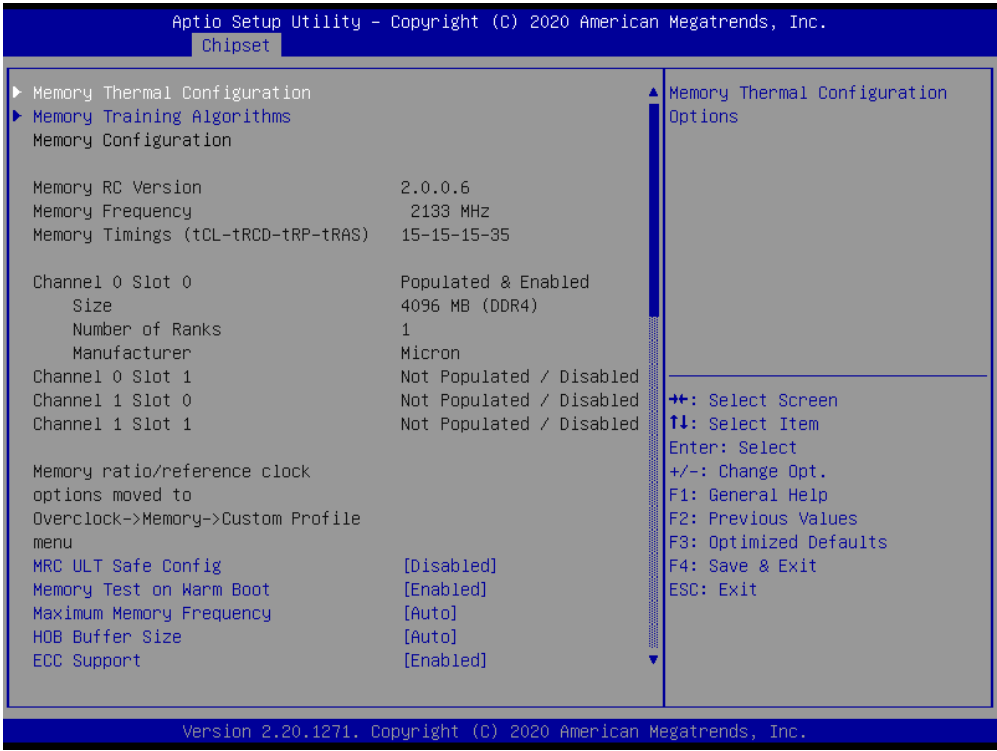

►Memory Thermal Configuration

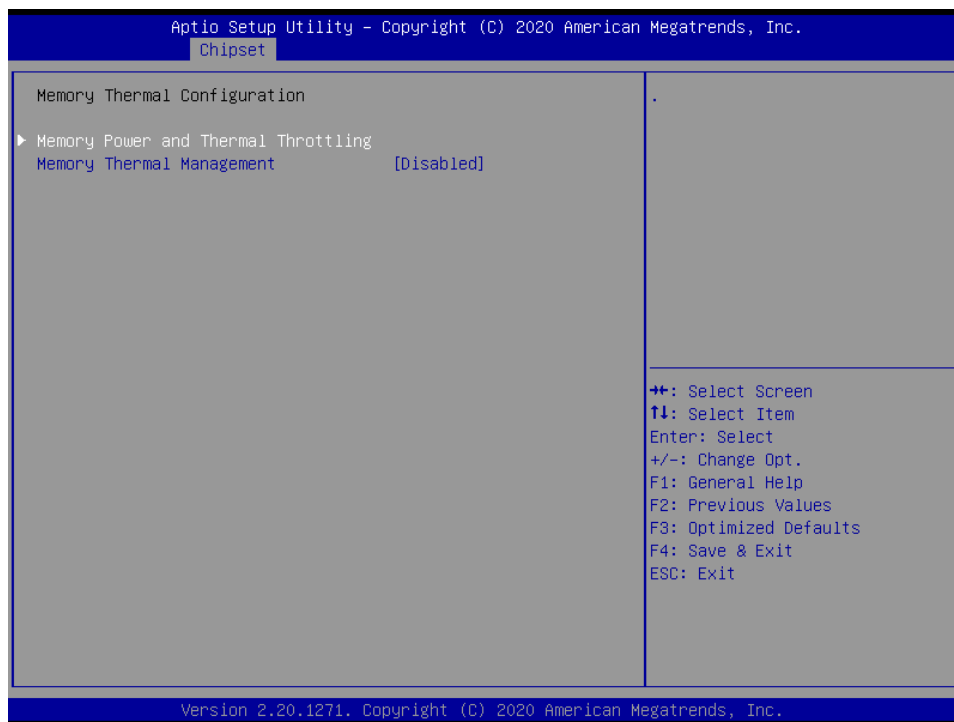

Memory Power and Thermal Throttling



This item contains the configuration of the Memory Power and Thermal Throttling.

Memory Thermal Management

This item sets the Memory Thermal Management on(Enabled) or off(Disabled).


►Memory Training Algorithms

This item shows the information of the Memory Training Algorithms.

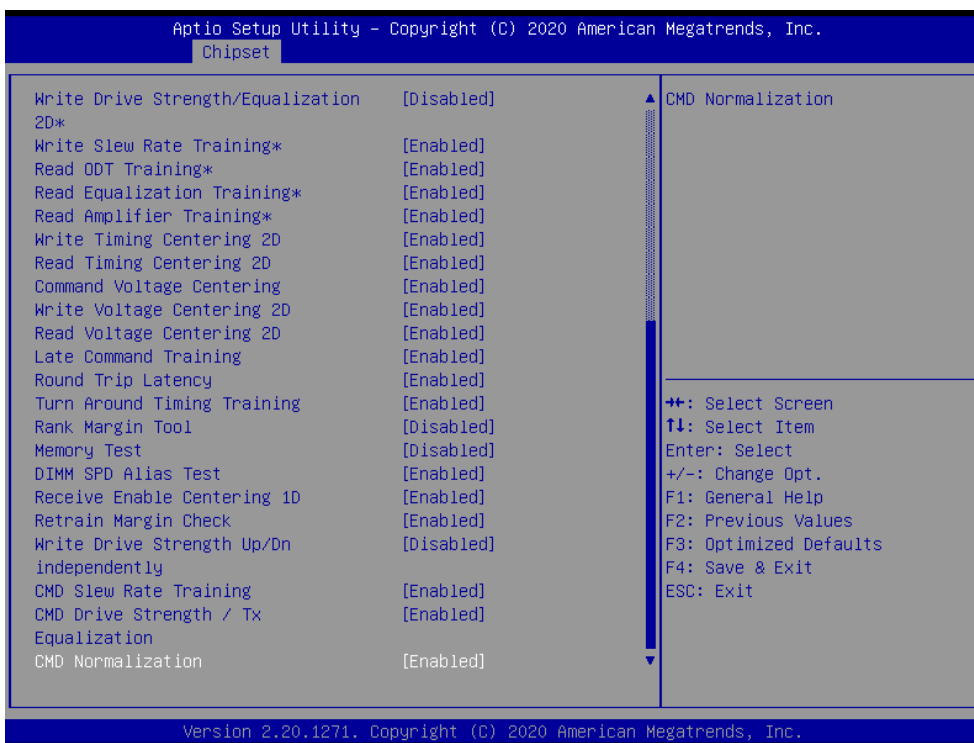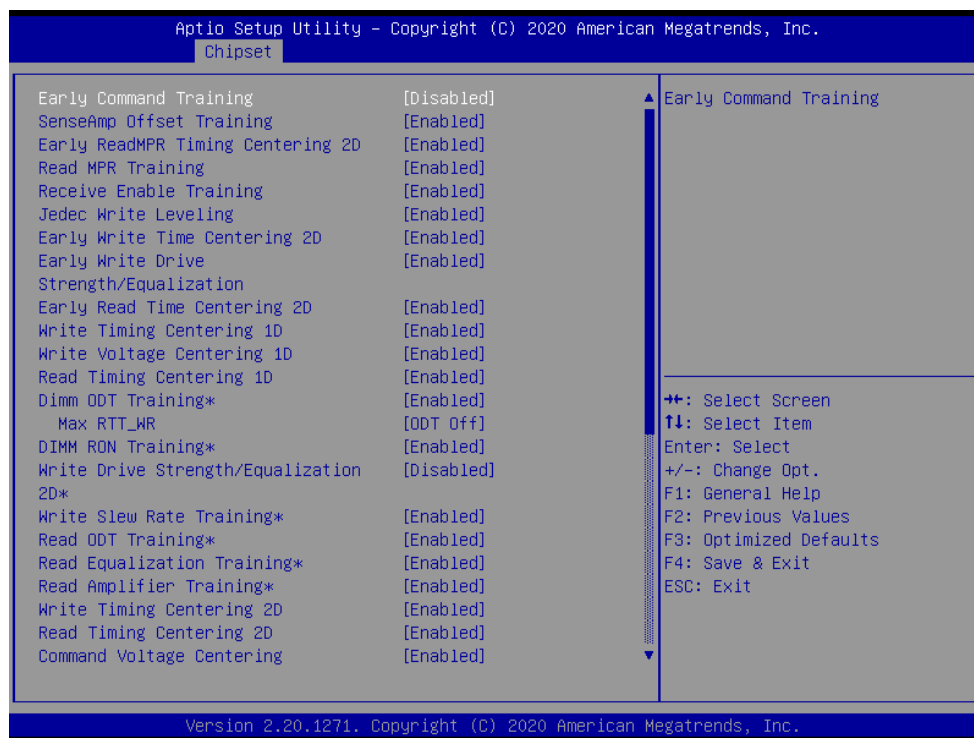


►Graphics Configuration


Image processing configuration, enter this sub-menu, there will be CPU-integrated graphics related settings.

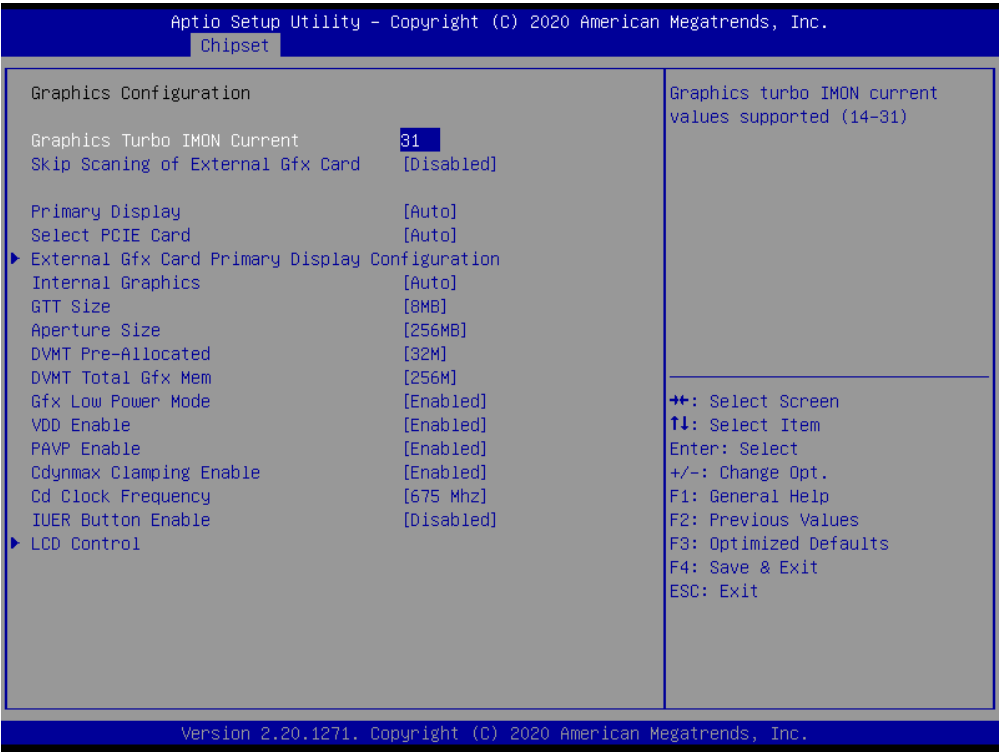

▶External Gfx Card Primary Display Configuration

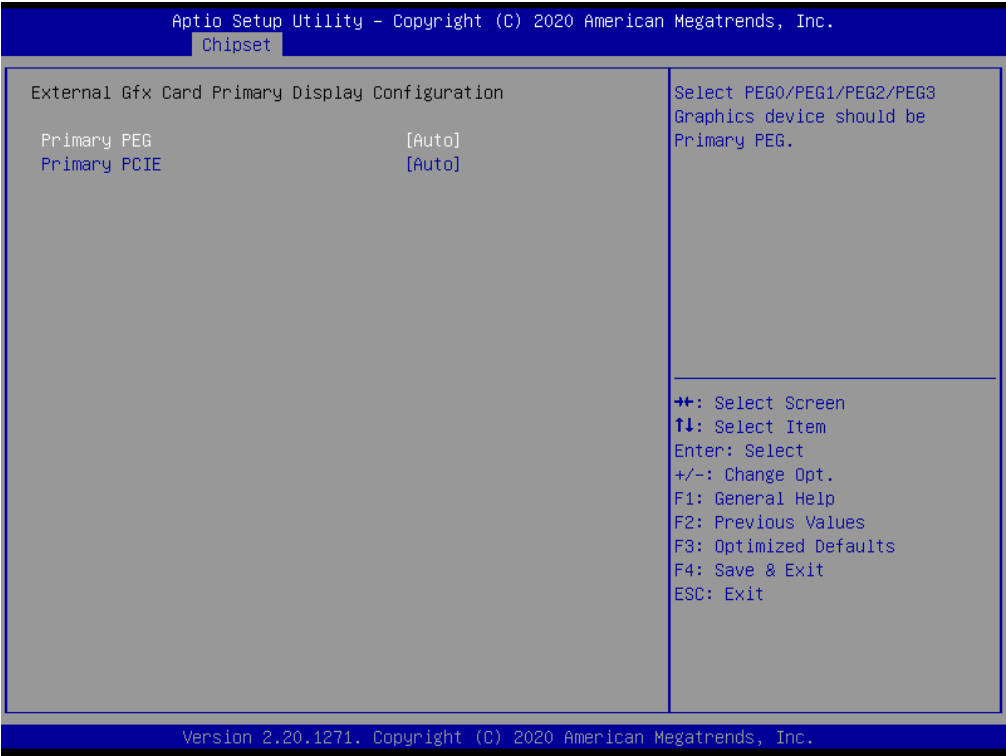

►LCD Control

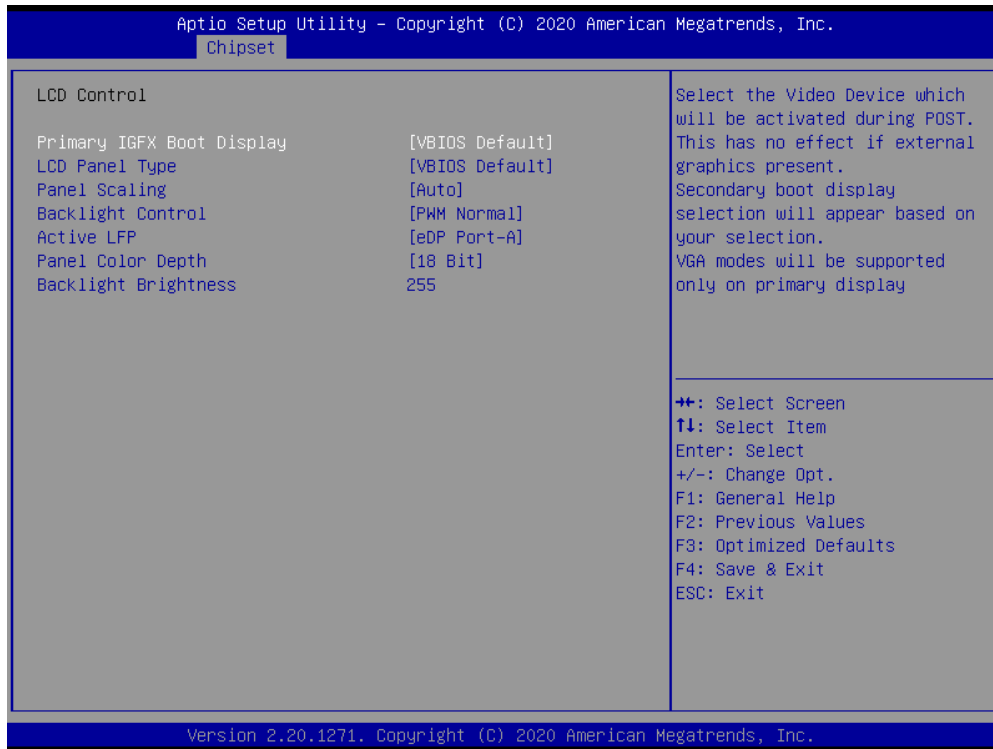


Primary IGFX Boot Display

This item sets IGFX main display device on POST stage, not affected by external graphics card, options are HDMI, LFP, EFP3, DP, EFP4. It defaults by VBIOS.

LCD Panel Type

This item sets resolution of the motherboard LVDS screen. It defaults by VBIOS.

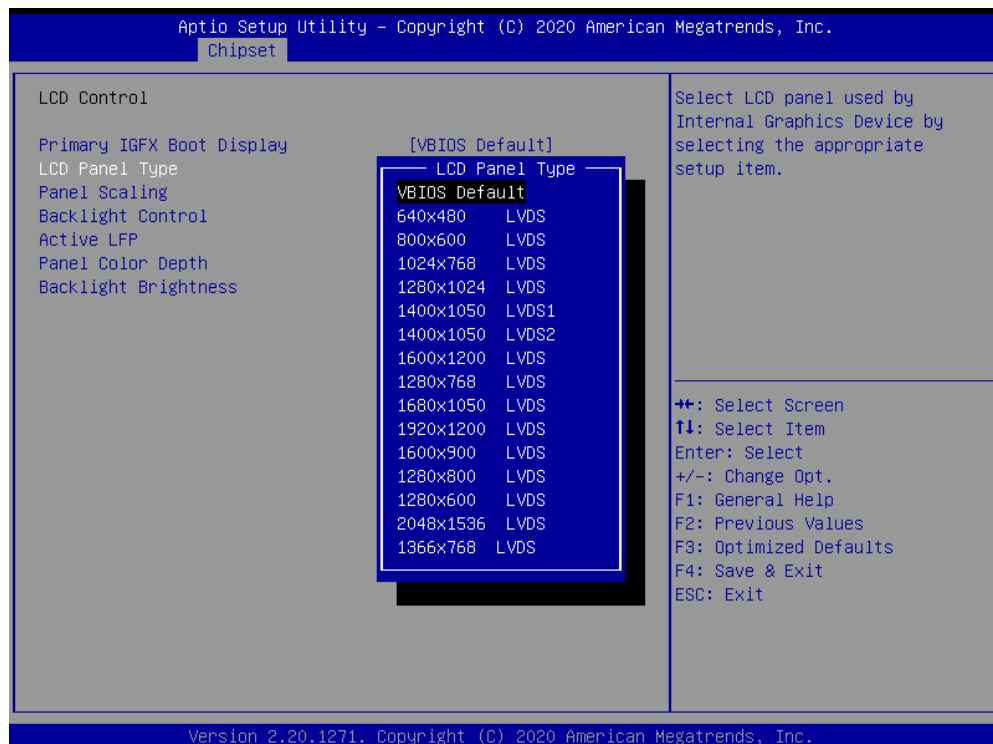


VT-d

This item sets the VT-d technology to open or close. The default is Enabled.


PCH-IO Configuration (South Bridge Configuration)

►PCI Express Configuration

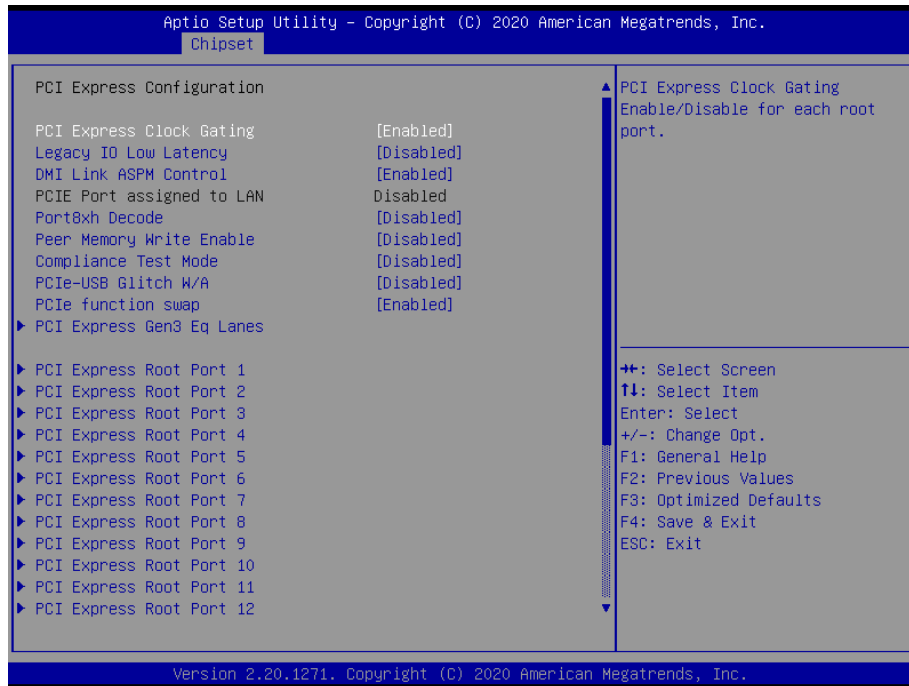


►SATA And RST Configuration


SATA hard disk and fast storage configuration, enter this sub-menu, there will be related settings of the hard disk.

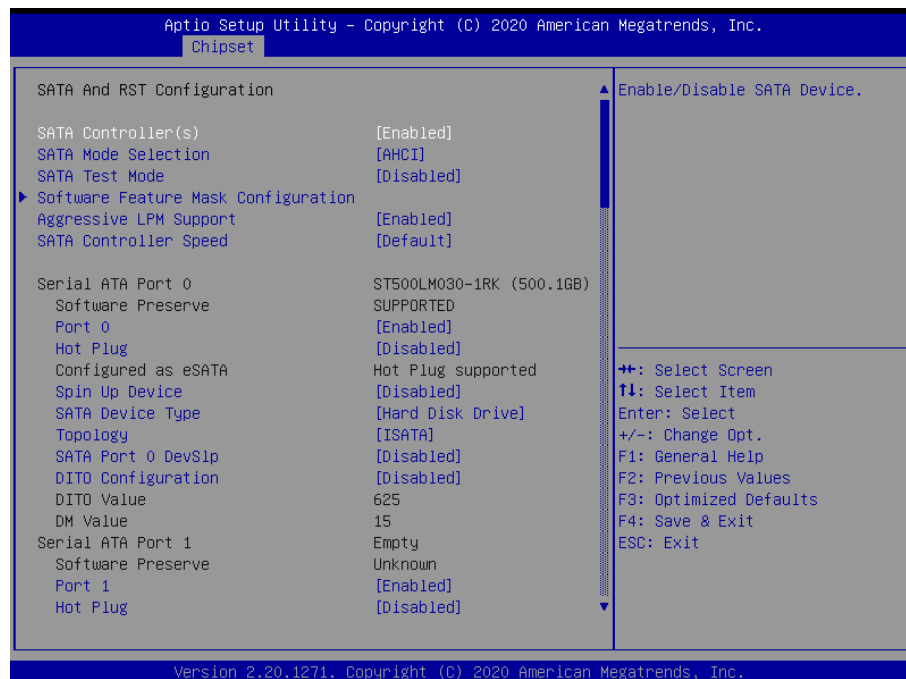

►USB Configuration

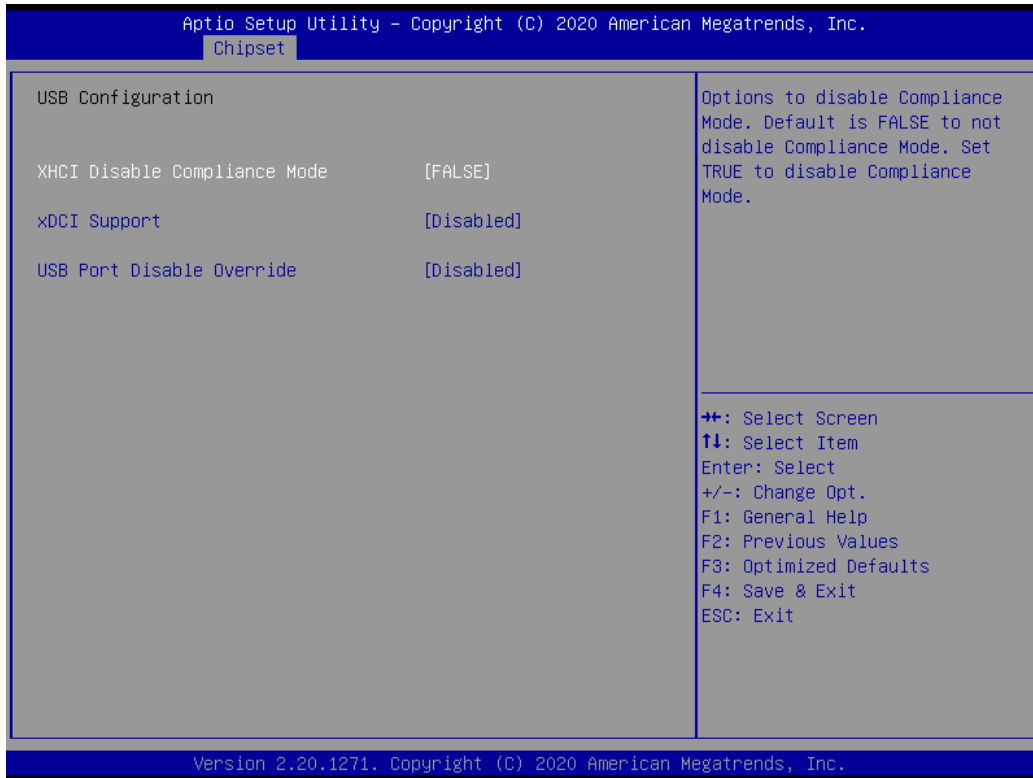

3.2.5 Security menu

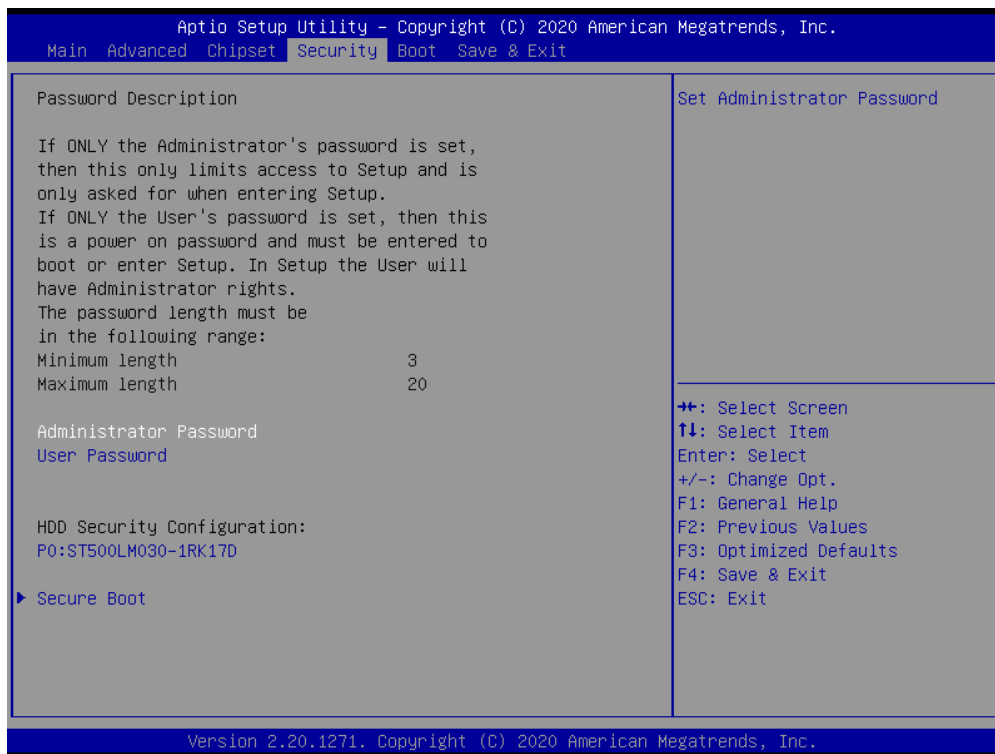

Administrator Password


This item sets the information of the administrator password.

User Password

This item sets the information of the normal user password.

►Secure Boot

3.2.6 Boot menu

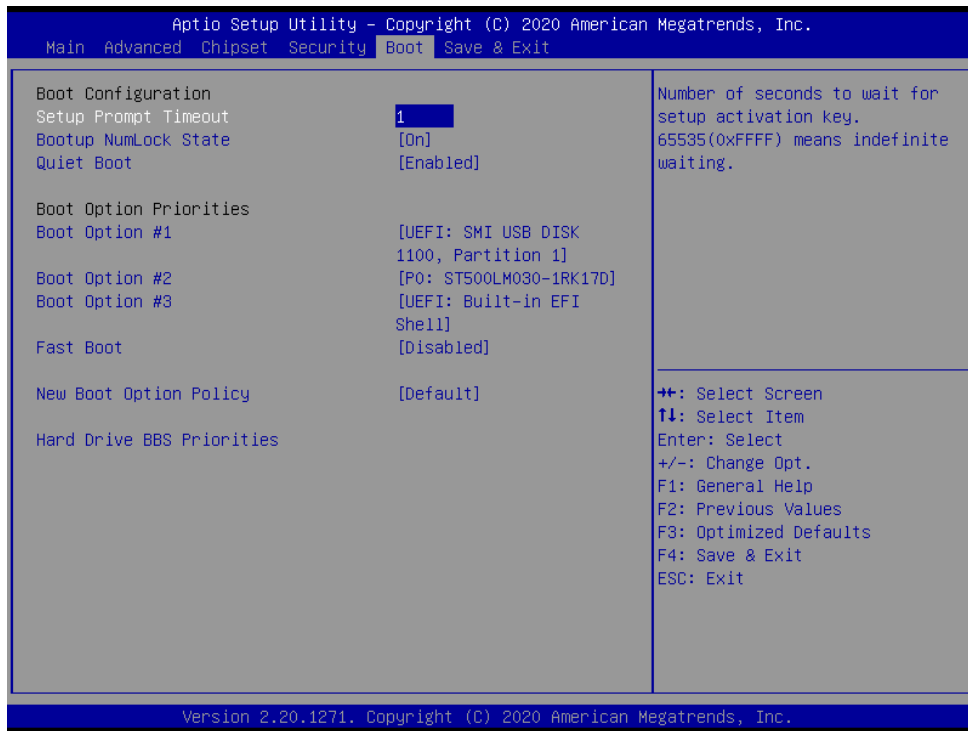

Setup Prompt Timeout

Setup prompts for waiting time. This option is to set the time to wait for the Del key to enter the BIOS setup after booting.

Bootup NumLock State

Set the state of the small numeric keypad at startup.


Quiet Boot

Switch full screen logo control

Fast Boot

Turn the quick start function on or off. When set to "Enabled", the system will skip some detection items and reduce the startup time.

New Boot Option Policy

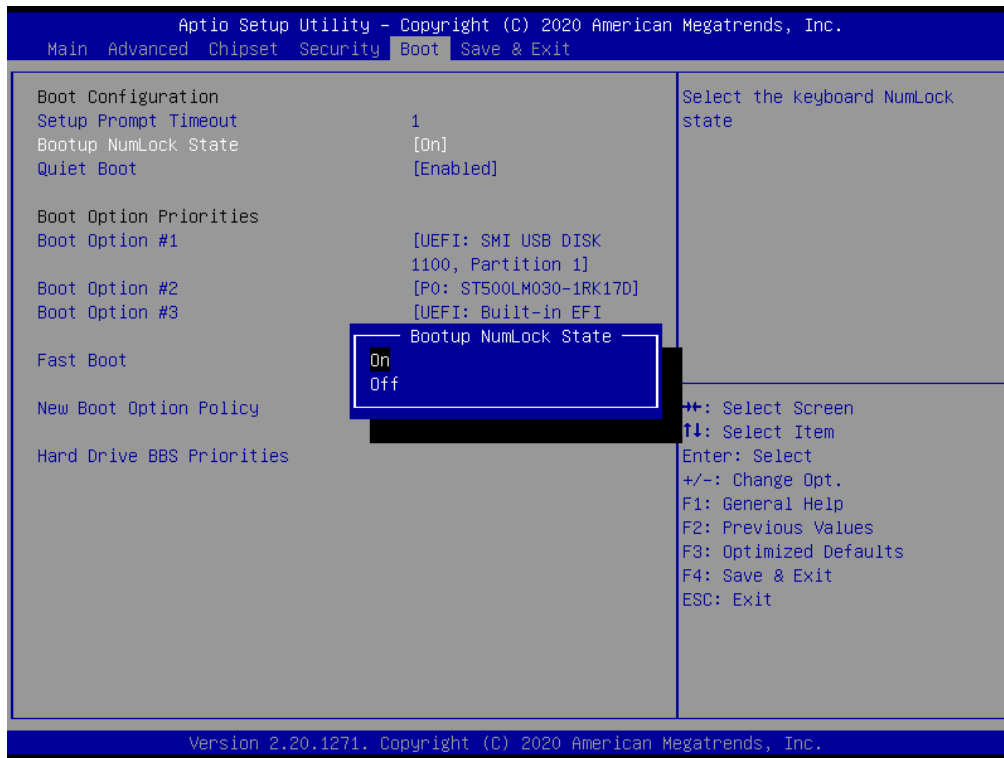

3.2.7 Save & Exit menu



Save changes and Exit;

This item enables you to save the changes that you have made and exit.

Discard Changes and Exit;

This item enables you to discard the changes that you have made and exit.

Save Changes and Reset;

This item enables you to save the changes that you have made and reset.

Discard Changes and Reset;

This item enables you to discard the changes that you have made and reset.

Save Changes;

This item enables you to save the changes that you have made.

Discard Changes;

This item enables you to discard the changes that you have made.

Restore Defaults;

This item enables you to restore the system defaults.

Save as User Defaults;

This item enables you to save the changes as user defaults that you have made.

Restore User Defaults;

This item enables you to restore the user defaults.

3.3 Updating the BIOS

The BIOS (Basic Input and Output System) Setup Utility displays the system's configuration status and provides you with options to set system parameters. The parameters are stored in battery-backed-up CMOS RAM that saves this information when the power is turned off. When the system is turned back on, the system is configured with the values you stored in CMOS.

The BIOS provides the underlying driver for hardware resources and is the bridge between hardware and operating system. Now hardware and various applications are constantly updated. When your system encounters problems, such as the system does not support the latest published CPU, you need to upgrade your BIOS.

NOTE:

1. Only upgrade the BIOS if you encounter problems and need to.
2. To upgrade the BIOS, please use the BIOS read/write program attached to our driver CD or download the updated version of the program from the relevant website.
3. Do not turn off the power or reboot the system during the upgrade process, so your BIOS data will be damaged and the system may not boot.
4. After the refresh is complete, you need to manually optimize the LOAD Default.
5. To prevent accidents, please backup the current BIOS data first.

CHAPTER**4****Driver Installation**

The KGEC-6300 comes with a CD-ROM that contains all drivers and utilities that meet your needs.

4.1 Follow the sequence below to install the drivers:

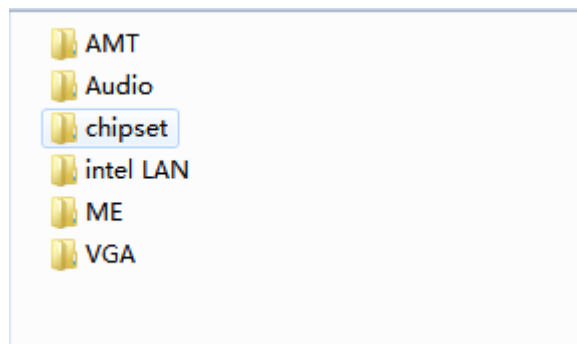


Figure 5.1 win7 drivers

Step 1 – Install Audio Driver

Step 2 – Install Chipset Driver

Step 3 – Install Graphic Driver

Step 4 – Install LAN Driver

Step 5 – Install ME Driver

Please read instructions below for further detailed installations.

4.2 Installation:

Insert the STX-I952 CD-ROM into the CD-ROM drive. And install the drivers in turn.

Step 1 – Install Graphic Driver

1. Double click on the Display folder and double click on the Setup.exe
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 2 – Install Audio Driver

1. Double click on the Audio folder and double click on the Setup.exe
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 3 –Install LAN Driver

1. Double click on the LAN folder and double click on the Setup.exe

2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 4 –Install Chipset Driver

1. Double click on the Chipset folder and double click on the Setup.exe
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 5 –Install ME Driver

1. Double click on the ME folder and double click on the Setup.exe
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

4.3 CPU TEMP LED driver

The STX-I952 provides temperature showing in LEDs, economic and reliable. Users can monitor the working state of the CPU according to the display of the LED. Please perform the following operations, making LEDs work normally.

Find the CPU temperature test tool folder and open it, as shown below;

Run the exe application;

NOTE: Please add the exe application to the startup item to ensure that the program can run when power on.

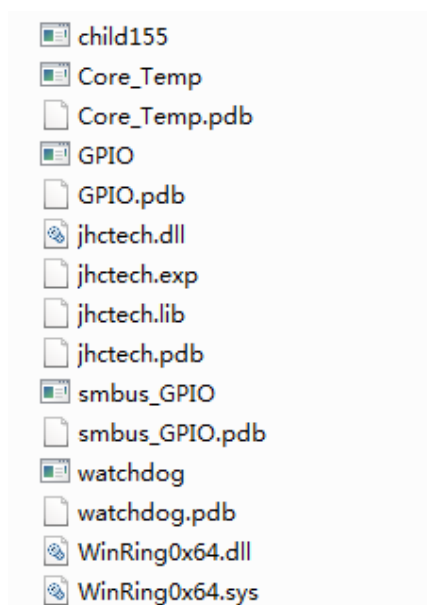


Figure 5.3

4.4 Utility Software Reference

All the utility software available from this page is Windows compliant. They are provided only for the convenience of the customer. The following software is furnished under license and may only be used or copied in accordance with the terms of the license. These software(s) are subject to change at any time without prior notice. Please refer to the support disk for available software.

CHAPTER

5



SYSTEM RESOURCE

5.1 WDT and GPIO

```

/* =====
1  * void jhctech_init();
2  * function description: library initialization, This function must be called before calling other
functions
3  * parameter description:
4  * creation date:
5*=====*/
/* =====
1  * void jhctech_init();
2  * function description: library release, Pair with jhctech_init, release the library's occupied resources
when not needed
3  * parameter description:
4  * creation date:
5*=====*/
/* =====
1  * BYTE I952_MB_gpio_input(WORD port)
2  * function description: read the motherboard GPIO input level
3  * parameter description:
Return value: return a byte (8 bit), each bit of 8 bit corresponding to the level state of a GPIO pin

```

Return value	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
GPIO pin	PIN8	PIN7	PIN6	PIN5	PIN4	PIN3	PIN2	PIN1

Parameter: port fill in motherboard GPIO number which is designed by factory

Note:

```

4  * creation date:
5*=====*/
/* =====
1  * void I952_MB_gpio_output(WORD port,BYTE value);
2  * function description: high and low levels output of the motherboard
3  * parameter description:
Parameter: port fill in motherboard GPIO number which is designed by factory
Value 8 bit of a Byte, each bit controls a GPIO pin output value,

```

Bit =1, means output high level

Bit =0, means output low level

Note:

4	*	Value	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
		GPIO pin	PIN8	PIN7	PIN6	PIN5	PIN4	PIN3	PIN2	PIN1

creation date:

```
5*=====*/
/*=====
```

```
1  * void I952_MB_gpio_init();
2  * function description: initialization function of the motherboard gpio, This function must be called
once before using it
```

```
3  * parameter description:
4  * creation date:
5*=====*/
/*=====
```

```
1  * void I952_watchdog_set(int time);
2  * function description: Watchdog function
3  * parameter description: time is to Set the dog feeding time, Value between 0 and 255
```

Setting 0 means to turn off the watchdog

```
4  * creation date:
5*=====*/
/*=====
```

```
1  * void I952_2nd_gpio_mode(int port,int mode);
2  *function description:Subcard input and output mode settings
3  *parameter description:
```

Parameter: port fill in subcard GPIO number, 1or 2

Mode 8 bit of a bit, each bit controls the input and output mode of a GPIO pin,

Bit=1,the corresponding pin is used as the input port.

Bit =0, the corresponding pin is used as an output port.

Mode	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
GPIO pin	PIN8	PIN7	PIN6	PIN5	PIN4	PIN3	PIN2	PIN1

Note: The output value is valid only when the pin is in output mode.

4*creation date:

5*=====*/
/*=====

2* void I952_2nd _output(int port,int level);

2* function description: high and low levelsoutput of thesubcard

3*parameter description:

Parameter:port fill in subcard GPIO number, 1 or 2

Level 8 bit of aByte, each bit controls a GPIO pin output value,

Bit=1, means output high level

Bit =0, means output low level

Level	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
GPIO pin	PIN8	PIN7	PIN6	PIN5	PIN4	PIN3	PIN2	PIN1

Note: The output value is valid only when the pin is in output mode.

4*creation date:

5*=====*/
/*=====

1* int I952_2nd_input (int port);

2 * function description: read the motherboard GPIO input level

3 * parameter description:

Return value: return a byte (8 bit), eachbit of 8 bit corresponding to the level state of a GPIO pin

Return value	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
GPIO pin	PIN8	PIN7	PIN6	PIN5	PIN4	PIN3	PIN2	PIN1

parameter: port fill in subcard GPIO number, 1 or 2

Note:The read value is valid only when the pin is in input mode

4*creation date:

5*=====*/

Note: If you want more programs of the motherboard's watchdog and subcard's GPIO, please call +86-0755-86021176-(8021)/+86-0755-86021176-(8023) for more information.